

10/21/99



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Patent Application Transmittal

Assistant Commissioner of Patents  
Washington, DC 20231  
Sir:

Transmitted herewith for filing is the Patent Application of:

Inventor: Mark C. Davis, J. R. Hind, M. L. Peters, and B. B. Topol

For: Selective Data Encryption Using Style Sheet Processing for Decryption by a Group Clerk

Enclosed are:

☒ 21 Sheets of Formal Drawings

☒ An assignment of the invention to International Business Machines, Armonk, NY 10504

☒ Declaration and Power of Attorney



The filing fee has been calculated as shown below:

Other Than Small Entity

For:	No. Filed	No. Extra	Rate	Fee
Basic Fee				\$ 760.00
Total Claims	81-20 =	61	61 x \$ 18.00=	\$ 1,098.00
Indep. Claims	3 - 3 =	0	0 x \$ 78.00=	\$ .00
<input checked="" type="checkbox"/> Multiple Dependent Claim Presented			\$260.00	\$ 260.00
			TOTAL	\$ 2,118.00


Deposit Account Authorization:

- ☒ Please charge Deposit Account No. 09-0461 in the amount of \$2,118.00. A duplicate copy of this sheet is enclosed.  
☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 09-0461. A duplicate copy of this sheet is enclosed.  
☒ Any additional filing fees required under 37 C.F.R. §1.16.  
☒ Any patent application processing fees under 37 C.F.R. §1.17.

Date: October 21, 1999

Respectfully submitted,

From: Jeanine S. Ray-Yarletts  
IBM Corporation  
IPLaw, Dept. T81/Bldg. 062  
P.O. Box 12195  
Research Triangle Park, NC 27709

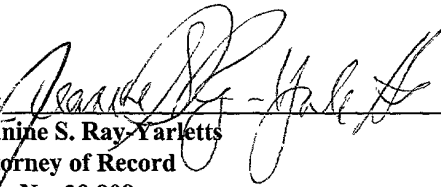By:   
Jeanine S. Ray-Yarletts  
Attorney of Record  
Reg. No. 39,808

Telephone: 919-543-2541  
Fax: 919-254-4330

A

10/21/99  
1c713 U.S. PTO

Docket No. RSW9-99-111

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re application of: M. C. Davis, et al

Filed: Herewith

For: **Selective Data Encryption Using Style Sheet Processing for Decoration  
by a Group Clerk**

Assistant Commissioner of Patents  
Washington, D.C. 20231

**EXPRESS MAIL CERTIFICATE**

"Express Mail" label number: EK008147355US

Date of Deposit: October 21, 1999

**WE REQUEST THE DATE OF DEPOSIT AS THE DATE FILED.**

I hereby certify that the following **attached** correspondence comprising:

1. Patent Application Transmittal, in duplicate
2. Application, 133 pages
3. Formal Drawings, 21 sheets
4. Recordation Form Cover Sheet for Assignment, in duplicate
5. Assignment
6. Declaration and Power of Attorney for Patent Application
7. Business Reply Postcard


is being deposited with the United States Postal Service Express Mail Post Office to Addressee service under CFR 1.10 on the date indicated above and is addressed to:

**Box Patent Application  
Assistant Commissioner of Patents  
Washington, D.C. 20231**

Dianne Lane  
(Name of person mailing paper or fee)

Dianne Lane

EXPRESS MAIL LABEL NO. EK008147355US      DATE OF DEPOSIT: October 21, 1999  
I hereby certify that this paper and fee are being deposited with the United States Postal Service  
Express Mail Post Office to Addressee service under 37 CFR §1.10 on the date indicated above and is  
addressed to the Assistant Commissioner of Patents, Washington, D.C. 20231

<u>Dianne Lane</u> NAME OF PERSON MAILING PAPER AND FEE	 SIGNATURE OF PERSON MAILING PAPER AND FEE
--	---

INVENTORS: Mark C. Davis, John R. Hind, Marcia L. Peters, Brad B. Topol

## Selective Data Encryption Using Style Sheet Processing for Decryption by a Group Clerk

### BACKGROUND OF THE INVENTION

#### Related Inventions

This application is related to the applications having serial numbers 09/\_\_\_\_\_ entitled  
“Selective Data Encryption Using Style Sheet Processing”, 09/\_\_\_\_\_ entitled “Selective Data  
Encryption Using Style Sheet Processing for Decryption by a Client Proxy”, and 09/\_\_\_\_\_  
entitled “Selective Data Encryption Using Style Sheet Processing for Decryption by a Key  
Recovery Agent”, all assigned to the same assignee and filed concurrently herewith on October  
21, 1999.

### **Field of the Invention**

The present invention relates to a computer system, and deals more particularly with a method, system, and computer program product for selectively encrypting one or more document elements using style sheet processing. The document may be an Extensible Markup Language (XML) document, and the style sheet processor may be an Extensible Stylesheet Language (XSL) processor.

### **Description of the Related Art**

Cryptography is a security mechanism for protecting information from unintended disclosure by transforming the information into a form that is unreadable to humans, and unreadable to machines that are not specially adapted to reversing the transformation back to the original information content. The cryptographic transformation can be performed on data that is to be transmitted electronically, such as an electronic mail message or an electronic document requested by a user of the Internet, and is equally useful for data that is to be securely stored, such as the account records for customers of a bank or credit company.

The transformation process performed on the original data is referred to as “encryption”. The process of reversing the transformation, to restore the original data, is referred to as “decryption”. The terms “encipher” and “decipher” are also used to describe these processes, respectively. A mechanism that can both encipher and decipher is referred to as a “cipher”.

Use of a “key” during the encryption and decryption processes helps make the cipher more difficult to break. A key is a randomly-generated number factored into operation of the encryption to make the result dependent on the key. The value used for the key in effect “personalizes” the algorithm, so that the same algorithm used on the same input data produces a different output for each different key value. When the value of this key is unknown to unauthorized persons, they will not be able to duplicate or to reverse the encryption.

One of the oldest and most common security systems today is what is known as a “private key” or “symmetric” security system. Private key systems involve two users, both of whom have a shared secret (or private) key for encrypting and decrypting information passed between them over a network. Before communications can occur, the two users must communicate in some secure manner to agree on this private key to ensure the key is known only to the two users. An example of a cipher used for private key security is the Data Encryption Algorithm (“DEA”). This algorithm was developed by scientists of the International Business Machines Corporation (“IBM”), and formed the basis of a United States federal standard known as the Data Encryption Standard (“DES”). Private key systems have a number of drawbacks in an open network environment such as the Internet, however, where users will conduct all communications over the open network environment and do not need or want the added overhead and expense of a separate secure means of exchanging key information before secure network communications occur.

To address the limitations of private key systems, security systems known as “public key”, or “asymmetric”, systems evolved. In a public key system, a user has a key pair that consists of a private key and a public key, both keys being used to encrypt and decrypt messages. The private key is never to be divulged or used by anyone but the owner. The public key, on the other hand, is available to anyone who needs to use it. As an example of using the key pair for encrypting a message, the originator of a message encrypts the message using the receiver’s public key. The receiver then decrypts the message with his private key. The algorithm and the public key used to encrypt a message can be exposed without comprising the security of the encrypted message, as only the holder of the associated private key will be able to successfully decrypt the message. A key pair can also be used to authenticate, or establish the identity of, a message originator. To use a key pair for authentication, the message originator digitally signs the message (or a digest thereof) using his own private key. The receiver decrypts the digital signature using the sender’s public key. A common means of publishing a public key to be used for a particular receiver is in an X.509 certificate, also known as a “digital identity”.

Public key encryption is generally computationally expensive, having numerous exponentiation operations. It also requires much longer key material than a symmetric key algorithm to provide equivalent security. Hence it is used sparingly, preferably only for cryptographic operations that need its unique properties. Symmetric key encryption is more widely used for bulk data encryption/decryption, because it demands less of the CPU, using primarily repeated shift, rotate, exclusive OR, and table lookup operations.

Public and symmetric key encryption methods are often combined. One example of their combination is the Secure Sockets Layer (SSL), and its follow-on replacement known as Transport Layer Security (TLS). Another example is the Internet Key Exchange (IKE) protocol of the IP Security Protocol, as defined in the Internet Engineering Task Force (IETF) document RFC 2411, "IP Security Document Roadmap".

In general, both the SSL and IKE protocols perform similar steps. First the parties are mutually authenticated using public key encryption, during which process X.509 certificates are exchanged and encryption algorithms negotiated. Then the first party creates a symmetric key and encrypts it using the second party's public key. The encrypted symmetric key is transferred to the second party, which then decrypts it using its private key. This process of negotiation and key transfer is called a "key agreement". A key agreement may have a predetermined expiration time, and the protocol may include means for subsequent key agreements. After completing a key agreement, the symmetric key can be used to perform efficient bulk data encryption between the parties.

The majority of current encryption techniques deal with encrypting an entire document for transmission to a known audience. Little attention has been given to the business-to-business security requirements of today's complex networking environments, where a document must flow asynchronously through a number of intermediate agents such as transcoders, gateways, and firewalls (where each agent may have a unique need to know different aspects of the transmitted information) and where the audience cannot be precisely determined beforehand.

Furthermore, key distribution in a complex, multi-business networking environment is a critical issue. If two parties repeatedly exchange encrypted data using the same key over and over again for successive documents (such as might occur when two businesses need to exchange transactional information in an on-going manner), then it makes it easier for a third party to crack the encryption and discover the document content of all the repeated transmissions. Thus, there must be a secure method for periodically distributing new keys between communicating parties. Likewise, if keys are changed and the subsequent keys are varied by an easily computed function of the base shared key, then the repeated transmissions would be easier to crack than if a random key were selected for each new transmission. It is therefore preferable to use a randomly-generated key value for each subsequent key. It is also preferable to use a new key for each document, to increase the security of the document. If a random key is used for each document, then a secure technique must exist to distribute this key to the receiver with a minimum of system overhead.

A document may be securely stored in an encrypted file system, or an encrypted file may be stored on a server where it can be accessed only by those possessing the decryption key. For the same reasons discussed above, each document should be encrypted with a different random key and a means must exist of distributing this key to all those who need to read the document.

A plaintext document can be protected during transmission by encrypting the transport-layer connection using SSL or TLS, or by creating an encrypted data-link-layer tunnel



using the IP Security Protocol (IPSec) or the Layer 2 Tunneling protocol (L2TP). However, such methods of protection only apply to connection-oriented systems where an end-to-end session exists between the sender and receiver at the time of transmission. Both offer techniques whereby the encryption key hiding the data is changed at regular intervals over the life of the session.

These approaches (encrypting the file, the file system, or the session) are not useful in some situations, however. In situations where several agents (such as a series of intermediaries including gateways, transcoders, and/or firewalls) must handle the document in succession, it may be necessary for each intermediary to have access to some of the encrypted data elements within a file or document. This implies that the intermediaries need the key for decrypting the file, making protection of the key a logistical nightmare. When encryption is performed at the level of the entire document, then an intermediary that receives the key will have access to the entire document rather than just those elements that may be needed for this intermediary's particular function, thus increasing the potential for unauthorized agents to gain access to the security-sensitive information.

Another problem situation for existing techniques (such as relying on an encrypted session) is transmitting documents through store-and-forward systems such as message queuing (MQ), where the sender and receiver connect to a store-and-forward server at different times and never establish end-to-end connections to one another. In an MQ system, even if the connection between the sender and the MQ server is encrypted, and the connection between the MQ server

and the receiver is encrypted, nevertheless the document is stored as plaintext on the MQ server for some period of time. This obviously creates a security exposure unless access to the MQ server is strictly controlled. It is unreasonable for the creator of security-sensitive information to rely on the MQ server (possibly including multiple such servers in a network path) to provide sufficient protection for preventing access to his plaintext document.

The existing approaches which have been described above (encrypting the session, encrypting the file system, or encrypting the file) are also not useful in the situation where the target client device has such limited CPU processing power that it cannot perform the necessary encryption/decryption operations, or performs them so slowly as to make the system unusable.

Electronic commerce is becoming increasingly important in today's global economy. Electronic commerce, also known as "e-commerce" or "e-business", involves the secure transfer of business-critical data to selected recipients over non-secure public networks such as the Internet. Consider the overall life cycle of an e-business document. In the general case, the document passes through various hands or agents, which differ greatly in terms of their "need to know" specific data elements within the document. Consider an employee record or document generated by an Enterprise Resource Planning (ERP) software application. This employee document is an example of a single document that may contain elements needing different types of access protection. The document may contain public information such as the employee's name, employee serial number, and date of hire. This information may need to be in plaintext form so the document is searchable in a database. The employee document may also contain salary

information that only managers may see. It may also contain payroll information that only the payroll department should view. Finally it may contain medical data that only medical personnel should see. In addition, the employee should be able to view the entire contents of his own employee document. Besides transit over a network, the document may pass through agents that store and forward the data, such as a company repository which records and time stamps transmitted and received documents for legal purposes, an e-mail system, an e-mail archive, an e-mail screening program on a firewall, and so forth. It is unreasonable to fully trust all the intermediaries in such an electronic commerce system. Furthermore, at the time of document construction, it is virtually impossible to foresee who all the ultimate consumers (i.e. requesting users or application programs) of the data may be, or which intermediary agents may handle the data, and yet the data must be protected. It is also unreasonable to create a customized document for each potential consumer, or to create a customized document upon each request by a different consumer, where the customized document would contain only those elements for which the consumer is authorized.

U. S. Patent \_\_\_\_\_ (serial number 09/240,387, filed 01/29/1999), titled "Method, System, and Apparatus for Selecting Encryption Levels Based on Policy Profiling" suggests tagging data elements in Extensible Markup Language ("XML") documents with field-level or record-level security information. ("XML" is a trademark of Massachusetts Institute of Technology.) By inspecting this security-level information and consulting directory entries concerning an individual's access privileges, a server responding to a document request suppresses any document elements for which the requester is unauthorized, determines the

encryption algorithm and key length required by the most restrictive remaining element (i.e. the remaining element having the highest-level security requirements), and encrypts the entire resulting filtered document accordingly. This invention does not solve the problem of encrypted documents with multiple authorized receivers and agents, each with a different need-to-know (i.e. it does not restrict the ability to read certain fields of a document to certain individuals or groups). Nor does it address the problem of client devices with insufficient processing power to decrypt received documents.

Several solutions for distributing encrypted key material along with the encrypted document to which the key applies are known in the art. The SMIME industry standard defined by the IETF is used in secure e-mail transmission, providing an encapsulation of digitally signed and encrypted objects. (See <http://www.ietf.org/html.charters/smime-charter.html> on the Web for more information.) The Lotus Notes® software uses a proprietary implementation for key distribution. (See <http://www.lotus.com> on the Web for more information about Lotus Notes. “Lotus Notes” is a registered trademark of Lotus Development Corporation.) However, neither of these existing approaches suggests that individual document fields be encrypted (and other fields not encrypted). Nor do they suggest having different authorized viewing communities, or using multiple and/or different encryption algorithms and/or keys for different fields in a document that need different levels of security (nor is a capability for distributing multiple keys per document available).

Accordingly, what is needed is a technique with which security policy can be efficiently enforced in a complex distributed network computing environment, incorporating many complex factors such as those described above.

## **SUMMARY OF THE INVENTION**

5           An object of the present invention is to provide a technique for enforcing security policy efficiently in a complex distributed networking environment.

Another object of the present invention is to provide this technique in a manner that enables data to be protected throughout the business process, and throughout transmission between agents in a network path from a document server to a document receiver, making security-sensitive information in the document visible only to those agents having a need to know the information while protecting the information from disclosure to other parties.

Yet another object of the present invention is to provide this technique whereby each of the different elements within a single document may use a different security policy, including the ability to use different security algorithms, keys, and key lengths from one element to another.

15           Still another object of the present invention is to provide this technique by applying style sheets to documents encoded in tag languages such as the Extensible Markup Language.

Yet another object of the present invention is to provide this technique whereby a group clerk assists in decrypting a selectively encrypted document on behalf of a group member, thereby offering increased protection for a private key assigned to the group.

5 A further object of the present invention is to provide a key distribution technique which enables a different key to be used for each encrypted document or document element, where each key used can be distributed to all document receivers without creating a security exposure.

Another object of the present invention is to provide this key distribution technique in a manner that enables an encryption key to be recovered whether the encrypted document resides in a file system or is in a queue en route to its target audience.

10 A further object of the present invention is to provide a selective data encryption technique that reduces the amount of data that must be encrypted to provide a given level of security, thereby improving the performance of security processing for client devices with limited capabilities.

15 Still another object of the present invention is to provide a technique for recovering the key(s) used to encrypt elements of a document.

Another object of the present invention is to provide these techniques in a backward-compatible manner, such that existing style sheets continue to function properly.

Other objects and advantages of the present invention will be set forth in part in the description and in the drawings which follow and, in part, will be obvious from the description or may be learned by practice of the invention.

To achieve the foregoing objects, and in accordance with the purpose of the invention as broadly described herein, the present invention provides a method, system, and computer program product for enforcing security policy using style sheet processing. In one embodiment, this technique comprises: providing an input document; providing one or more stored policy enforcement objects, wherein each of the stored policy enforcement objects specifies a security policy to be associated with zero or more elements of the input document; providing a Document Type Definition (DTD) corresponding to the input document, wherein the DTD has been augmented with one or more references to selected ones of the stored policy enforcement objects; executing an augmented style sheet processor; requesting, from a user or process on a client device, an encrypted output document, wherein the user or process is a member of a particular group authorized to view at least one selected encrypted elements in this encrypted output document; receiving the requested output document at the client device; and executing an augmented document processor on the client device. Executing the augmented style sheet processor preferably further comprises: loading the DTD; resolving each of the one or more references in the loaded DTD; instantiating the policy enforcement objects associated with the resolved references; executing selected ones of the instantiated policy enforcement objects during application of one or more style sheets to the input document, wherein a result of executing the selected ones is an interim transient document reflecting the execution; generating one or more

random encryption keys; encrypting selected elements of the interim transient document, wherein a particular one of the generated random encryption keys may be used to encrypt one or more of the selected elements, while leaving zero or more other elements of the interim transient document unencrypted; encrypting each of the one or more random encryption keys; and creating  
5 an encrypted output document comprising the zero or more other unencrypted elements, the selected encrypted elements, and the encrypted encryption keys. Executing the augmented document processor preferably further comprises: contacting a clerk of the particular group for decryption of selected ones of the encrypted encryption keys; and decrypting the requested output document using the decrypted selected ones of the encrypted encryption keys, thereby creating a result document.

Alternatively, the DTD may be replaced by a schema.

This technique may also comprise rendering the result document on the client device.

The interim transient document may comprise one or more encryption tags identifying elements needing encryption. The input document may be specified in an Extensible Markup  
15 Language (XML) notation, and the result document may also specified in this XML notation. The style sheets may be specified in an Extensible Stylesheet Language (XSL) notation.

The stored policy enforcement objects may further comprise executable code for overriding a method for evaluating the elements of the input document, and wherein executing



selected ones further comprises overriding this method for evaluating. This method may be a value-of method of the XSL notation, and overriding the value-of method may be by subclassing this value-of method. This overriding may further comprise generating encryption tags, and inserting the generated encryption tags into the interim transient document to surround elements of the interim transient document which are determined to require encryption. Encrypting selected elements may further comprise encrypting those elements surrounded by the inserted encryption tags.

Each of the instantiated policy enforcement objects may further comprise: a specification of a community that is authorized to view the elements associated with the security policy; and an encryption requirement for the elements associated with the security policy. The specification of the communities may further comprise specification of at least one of: (1) one or more individual users or processes which are community members, and (2) one or more groups which are community members, wherein each of the groups comprises one or more individual users or processes, where the particular group is specified as one of the community members. This encryption requirement may further comprise specification of an encryption algorithm. Or, this encryption requirement may further comprise specification of an encryption algorithm strength value, and/or specification of an encryption key length. The encryption requirement may have a null value to indicate that the specified security policy does not require encryption.

Encrypting the encryption keys may further comprise encrypting a different version of each of the random encryption keys for each of the one or more members of each of zero or more

of the communities which uses the encryption key, and wherein each of the different versions is encrypted using a public key of the community member for which the different version was encrypted.

5        Encrypting the selected elements may use a cipher block chaining mode encryption process.

10        This technique may further comprise: creating a key class for each unique community, wherein the key class is associated with each of the encrypted elements for which this unique community is an authorized viewer, and wherein the key class comprises: (1) a strongest encryption requirement of the associated encrypted elements; (2) an identifier of each of the members of the unique community; and (3) one of the different versions of the encrypted encryption key for each of the identified community members. Generating the one or more random encryption keys may generate a particular one of the random encryption keys for each of the key classes, wherein each of the different versions in a particular key class is encrypted from the generated encryption key generated for the key class. Encrypting the selected elements may use that one of the particular random encryption keys which was generated for the key class with which the selected element is associated. Contacting the group clerk may further comprise: locating the group clerk; and establishing a mutually-authenticated secure session between the client device and the group clerk. Decrypting the requested output document may further comprise: expanding the one or more groups of the communities to determine the individual users or processes in each of the expanded groups; determining one or more of the key classes

15

20

which identify the requesting user or process as one of the expanded group members; decrypting, for each of the determined key classes, the different version of the random encryption key in the key class which was encrypted using the public key of the one member, wherein the decrypting uses a private key of the one member which is associated with the public key which was used for encryption, thereby creating a decrypted key; and decrypting selected ones of the encrypted elements in the requested output document using the decrypted keys, wherein the selected ones of the encrypted elements are those which were encrypted for the key class. Rendering the result document may further comprise rendering the decrypted selected ones and the other unencrypted elements.

In one aspect, decrypting the requested output document may further comprise: expanding the one or more groups of the communities to determine the individual users or processes in each of the expanded groups; determining one or more of the expanded communities of which the requesting user or process is one of the expanded group members; decrypting, for each of the determined communities, the different version of the random encryption key which was encrypted using the public key of the one member, wherein the one member is the expanded group of which the requesting user or process is one of the expanded group members, thereby creating a decrypted key for each of the determined communities; and decrypting selected ones of the encrypted elements in the requested output document using the decrypted keys, wherein the selected ones of the encrypted elements are those which were encrypted for one of the determined communities. Rendering the result document may further comprise rendering the decrypted selected ones and the other unencrypted elements.

044337-1029066  
Contacting the group clerk may further comprise: locating the group clerk; and  
establishing a session between the client device and the group clerk. Decrypting the different  
version for each of the determined communities may further comprise: digitally signing the  
different version by the requesting user or process, thereby creating a first digital signature;  
5 sending the first digital signature and the different version to the group clerk on the session;  
receiving the sent first digital signature and the different version by the group clerk; verifying the  
first digital signature by the group clerk; verifying, by the group clerk, that the requesting user or  
process is one of the authorized members of the determined community associated with the  
different version; decrypting the different version using a private key of the one member which is  
associated with the public key which was used for encryption; re-encrypting the decrypted  
different version using a public key of the requesting user or process, thereby creating a re-  
encrypted key; digitally signing the re-encrypted key by the group clerk, thereby creating a second  
digital signature; returning the second digital signature and the re-encrypted key from the group  
clerk to the client device on the session; receiving the second digital signature and the re-  
encrypted key at the client device; verifying the second digital signature at the client device; and  
decrypting, at the client device, the received re-encrypted key using a private key of the  
requesting user or process, creating the decrypted key. Decrypting selected ones of the encrypted  
elements in the requested output document may be executed at the client device using the  
decrypted key.

20 Or, contacting the group clerk may further comprise: locating the group clerk; and  
establishing a mutually-authenticated secure session between the client device and the group clerk.

Dec decrypting the different version for each of the determined communities may further comprise: sending the different version to the group clerk on the secure session; receiving the sent different version by the group clerk; verifying, by the group clerk, that the requesting user or process is one of the authorized members of the determined community associated with the different version; 5 decrypting the different version using a private key of the one member which is associated with the public key which was used for encryption; returning the decrypted different version from the group clerk to the client device on the secure session; and receiving the decrypted different version at the client device. Decrypting the selected ones of the encrypted elements in the requested output document may be executed at the client device using the received decrypted different version.

In another aspect, decrypting the requested output document may further comprise: expanding the one or more groups of the communities to determine the individual users or processes in each of the expanded groups; determining one or more of the expanded communities of which the requesting user or process is one of the expanded group members; and decrypting selected ones of the encrypted elements in the requested output document, wherein the selected ones of the encrypted elements are those which were encrypted for one of the determined communities. Rendering the result document may further comprise rendering the returned decrypted elements and the other unencrypted elements.

Contacting the group clerk may further comprise: locating the group clerk; and 20 establishing a mutually-authenticated secure session between the client device and the group clerk.

Dec decrypting selected ones of the encrypted elements in the requested output document may further comprise: locating the different version of the random encryption key which was encrypted using the public key of the one member, wherein the one member is the expanded group of which the requesting user or process is one of the expanded group members; sending the located different version to the group clerk, along with an element encrypted with the different version, on the secure session; receiving the sent different version and the element by the group clerk; verifying, by the group clerk, that the requesting user or process is one of the authorized members of the determined community associated with the different version; decrypting the different version using a private key of the one member which is associated with the public key which was used for encryption; decrypting the element using the decrypted different version; and returning the decrypted element from the group clerk to the client device on the secure session.

Or, contacting the group clerk may further comprise: locating the group clerk; and establishing a session between the client device and the group clerk. Decrypting selected ones of the encrypted elements in the requested output document may further comprise: locating the different version of the random encryption key which was encrypted using the public key of the one member, wherein the one member is the expanded group of which the requesting user or process is one of the expanded group members; digitally signing, by the requesting user or process, the located version and an element encrypted with the different version, thereby creating a first digital signature; sending the first digital signature, the located different version, and the element to the group clerk on the session; receiving the sent first digital signature, the different version, and the element by the group clerk; verifying the first digital signature by the group clerk;



Figure 1 is a block diagram of a computer workstation environment in which the present invention may be practiced;

Figure 2 is a diagram of a networked computing environment in which the present invention may be practiced;

5           Figure 3 depicts a Document Type Definition (DTD) that has been augmented with security policy information, according to the preferred embodiments of the present invention;

Figures 4A - 4C illustrate an example of an employee document on which the present invention may operate; an interim representation of the employee document after being augmented with security information; and the same document after encryption has been performed;

Figures 5A - 5C depict examples of record or object formats that may be used with the preferred embodiments of the present invention;

Figure 6 provides an overview of the components involved in the preferred embodiments of the present invention, and the general data flows between them; and

15           Figures 7 through 12 illustrate flow charts depicting the logic with which the preferred embodiments of the present invention may be implemented.



## DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figure 1 illustrates a representative workstation hardware environment in which the present invention may be practiced. The environment of Fig. 1 comprises a representative single user computer workstation 10, such as a personal computer, including related peripheral devices.

5 The workstation 10 includes a microprocessor 12 and a bus 14 employed to connect and enable communication between the microprocessor 12 and the components of the workstation 10 in accordance with known techniques. The workstation 10 typically includes a user interface adapter 16, which connects the microprocessor 12 via the bus 14 to one or more interface devices, such as a keyboard 18, mouse 20, and/or other interface devices 22, which can be any user interface device, such as a touch sensitive screen, digitized entry pad, etc. The bus 14 also connects a display device 24, such as an LCD screen or monitor, to the microprocessor 12 via a display adapter 26. The bus 14 also connects the microprocessor 12 to memory 28 and long-term storage 30 which can include a hard drive, diskette drive, tape drive, etc.

The workstation 10 may communicate with other computers or networks of computers, for example via a communications channel or modem 32. Alternatively, the workstation 10 may communicate using a wireless interface at 32, such as a CDPD (cellular digital packet data) card. The workstation 10 may be associated with such other computers in a local area network (LAN) or a wide area network (WAN), or the workstation 10 can be a client in a client/server arrangement with another computer, etc. All of these configurations, as well as the appropriate  
20 communications hardware and software, are known in the art.

Figure 2 illustrates a data processing network 40 in which the present invention may be practiced. The data processing network 40 may include a plurality of individual networks, such as wireless network 42 and network 44, each of which may include a plurality of individual workstations 10. Additionally, as those skilled in the art will appreciate, one or more LANs may be included (not shown), where a LAN may comprise a plurality of intelligent workstations coupled to a host processor.

Still referring to Figure 2, the networks 42 and 44 may also include mainframe computers or servers, such as a gateway computer 46 or application server 47 (which may access a data repository 48). A gateway computer 46 serves as a point of entry into each network 44. The gateway 46 may be preferably coupled to another network 42 by means of a communications link 50a. The gateway 46 may also be directly coupled to one or more workstations 10 using a communications link 50b, 50c. The gateway computer 46 may be implemented utilizing an Enterprise Systems Architecture/370 available from IBM, an Enterprise Systems Architecture/390 computer, etc. Depending on the application, a midrange computer, such as an Application System/400 (also known as an AS/400) may be employed. (“Enterprise Systems Architecture/370” is a trademark of IBM; “Enterprise Systems Architecture/390”, “Application System/400”, and “AS/400” are registered trademarks of IBM.)

The gateway computer 46 may also be coupled 49 to a storage device (such as data repository 48). Further, the gateway 46 may be directly or indirectly coupled to one or more workstations 10.

Those skilled in the art will appreciate that the gateway computer 46 may be located a great geographic distance from the network 42, and similarly, the workstations 10 may be located a substantial distance from the networks 42 and 44. For example, the network 42 may be located in California, while the gateway 46 may be located in Texas, and one or more of the workstations 10 may be located in New York. The workstations 10 may connect to the wireless network 42 using a networking protocol such as the Transmission Control Protocol/Internet Protocol ("TCP/IP") over a number of alternative connection media, such as cellular phone, radio frequency networks, satellite networks, etc. The wireless network 42 preferably connects to the gateway 46 using a network connection 50a such as TCP or UDP (User Datagram Protocol) over IP, X.25, Frame Relay, ISDN (Integrated Services Digital Network), PSTN (Public Switched Telephone Network), etc. The workstations 10 may alternatively connect directly to the gateway 46 using dial connections 50b or 50c. Further, the wireless network 42 and network 44 may connect to one or more other networks (not shown), in an analogous manner to that depicted in Fig. 2.

Software programming code which embodies the present invention is typically accessed by the microprocessor 12 of server 47 or an intermediary such as gateway 46 (hereinafter referred to simply as an intermediary) - and by workstation 10 in several embodiments of the present invention - from long-term storage media 30 of some type, such as a CD-ROM drive or hard drive. The software programming code may be embodied on any of a variety of known media for use with a data processing system, such as a diskette, hard drive, or CD-ROM. The code may be distributed on such media, or may be distributed to users from the memory or storage of one

computer system over a network of some type to other computer systems for use by users of such other systems. Alternatively, the programming code may be embodied in the memory 28, and accessed by the microprocessor 12 using the bus 14. The techniques and methods for embodying software programming code in memory, on physical media, and/or distributing software code via networks are well known and will not be further discussed herein.

A user of the present invention may connect his computer to a server using a wireline connection, or a wireless connection. Wireline connections are those that use physical media such as cables and telephone lines, whereas wireless connections use media such as satellite links, radio frequency waves, and infrared waves. Many connection techniques can be used with these various media, such as: using the computer's modem to establish a connection over a telephone line; using a LAN card such as Token Ring or Ethernet; using a cellular modem to establish a wireless connection; etc. The user's computer may be any type of computer processor, including laptop, handheld or mobile computers; vehicle-mounted devices; desktop computers; mainframe computers; etc., having processing (and optionally communication) capabilities. The remote server and the intermediary, similarly, can be one of any number of different types of computer which have processing and communication capabilities. These techniques are well known in the art, and the hardware devices and software which enable their use are readily available. Hereinafter, the user's computer will be referred to equivalently as a "workstation", "device", or "computer", and use of any of these terms or the term "server" refers to any of the types of computing devices described above.

10 In the preferred embodiments, the present invention is implemented as one or more  
computer software programs. The software may operate on a server, on a user workstation,  
and/or on an intermediary in a network, as one or more modules (also referred to as code  
subroutines, or "objects" in object-oriented programming) which are invoked upon request. The  
5 server or intermediary may be providing services in an Internet environment, in a corporate  
intranet or extranet, or in any other network environment.

15 The present invention defines a novel technique for selectively enforcing security policy in  
a distributed network computing environment using style sheet processing. A policy-driven  
augmented style sheet processor is used to create a selectively-encrypted document carrying  
key-distribution material, such that by using an augmented document processor an agent can  
recover a Document Object Model ("DOM") containing only the information elements for which  
the agent is authorized. In the preferred embodiments, the augmented style sheet processor is an  
augmented Extensible Stylesheet Language ("XSL") processor, the document is an XML  
document, and the augmented document processor is an augmented XML processing engine.  
Documents encoded in this fashion support improved group collaboration models, giving more  
people easier access to information for which they are authorized, while protecting sensitive data  
from unauthorized agents. The present invention also provides a novel, efficient way to recover  
encrypted data from documents encoded according to the inventive techniques disclosed herein.

20 A number of terms to be used in the description of the preferred embodiments will now be  
defined.

- 5
- “Community” refers to the collection of viewers to which a given authorization policy applies, in regard to a specific class of information. In the employee record example previously discussed, “all managers” or “employee plus all medical personnel” are examples of potential communities. In the preferred embodiments, a community is represented by the distinguished names (DNs) of one or more individuals and/or groups comprising that community. For each DN there is a corresponding X.509 certificate. In the preferred embodiments of the present invention, whenever a group can be represented by a single certificate, that group certificate is preferred in place of all the individual certificates for all the group’s members (as will be described in more detail with reference to Fig. 7A).
  - “Element visibility” is a policy that defines to whom (where this may be people and/or application programs or processes) an element defined by a DTD (or alternatively, by a schema) should be made visible, and under what conditions. According to the preferred embodiments, a visibility policy defines (1) the minimum encryption strength required for the element, and (2) the community that is authorized to see the element’s value. “Minimum encryption strength” can be resolved to a specific encryption algorithm and key length (e.g. by consulting a directory or lookup table, etc.). Encryption that is stronger than required can satisfy an element visibility policy, but weaker-than-required encryption is never satisfactory. (Note that while the preferred embodiments discuss dynamically determining an algorithm and key length to provide the minimum encryption strength which has been specified in a policy object, in an alternative approach the algorithm identifier and key length may be specified directly in the policy object without deviating from the scope of the present invention. In this case, a determination as to which of multiple algorithms and associated key lengths provides a
- 20

stronger encryption may be made by using a look-up table in which the pertinent values are arranged in a particular order of strength, by coding the relative strength values directly into an implementation, etc. It will be obvious to one of ordinary skill in the art how the descriptions of the preferred embodiments are to be modified when using this alternative approach.)

- “Group” refers to a collection of one or more individuals or processes (i.e. application entities) who are authorized members of a community. Preferably, a group is represented by a named object in an LDAP directory. (Alternatively, other storage repositories may be used.) The information stored for a particular group comprises: (1) the group’s X.509 certificate; (2) a pointer (or other identifier) identifying a group clerk or clerks; and (3) pointers to each group member. (The X.509 certificates for each group member are then contained in, or pointed to from, the group member’s stored information.) If a proxy or agent is authorized to act on behalf of a group or group member, the proxy is also identified as a group member.
- “Group clerk” refers to a process that maintains the private key for a group, rather than having each group member store the private key. The clerk is contacted during the decryption of secure document content being served to a group member, and provides information for use in the decryption process. Each group has at least one clerk. Multiple clerks may be identified for a single group for purposes of hot backup and/or load distribution, where each such clerk has equivalent processing privileges on behalf of a particular group.

U. S. Patent \_\_\_\_\_ (serial number 09/385,899, filed 08/30/1999), titled “Enforcing Data Policy Using Style Sheet Processing”, discloses a technique for controlling the content of a

document using stored policy information. This invention, referred to hereinafter as the “referenced invention”, is incorporated herein by reference. The present invention defines an extension to the stored policy objects defined in this referenced invention, whereby the stored policy objects further comprise attributes specifying the element visibility information described above. These extensions will be described in more detail with reference to Figs. 7A through 7C.

The employee record example previously discussed will be used to illustrate the benefits as well as the implementation of the present invention. Suppose a company maintains a database (or other repository) of information about its employees, and further suppose that the stored record for each employee comprises the employee’s name, employee serial number, data of hire, current salary, and any pertinent medical conditions. Fig. 3 depicts an example of a DTD 300 that may be used to describe the data in the record for an employee of this company. As is well known in the art, a DTD is a definition of the structure of an XML document, and is encoded in a file which is intended to be processed, along with the file containing a particular XML document, by an XML parser. The DTD tells the parser how to interpret the document which was created according to that DTD. (Note that while the present invention is described with reference to information specified in a DTD, the information may be specified in other semantically equivalent forms. In particular, the schemas which are currently being standardized by the World Wide Web Consortium may be used instead of DTDs. Refer to “XML Schema Part 1: Structures”, which can be found on the Internet at <http://www.w3.org/TR/xmlschema-1/>, for more information. References herein to a DTD are to be interpreted as applying equally to a schema.) This DTD



300 includes entries for the employee name (“empl\_name”) 350, the employee serial number (“ser\_nbr”) 360, “date\_of\_hire” 370, “curr\_salary” 380, and “medical\_condition” 390.

This DTD 300 has been augmented with data policy information which, according to the present invention, includes element visibility information that can be used to selectively encrypt the associated document elements, thereby restricting access to the values of the document elements. As defined by the referenced invention, data policy (as extended by the present invention to include element visibility) can be associated with a document’s data structures by modifying the DTD for the document to specify the URI (Uniform Resource Indicator) of each applicable policy. Three different data policies, each with different element visibility, will be used to illustrate the employee record example. Each policy will now be discussed, along with the element visibility information specified in the stored policy objects.

The policy used for the employee name, serial number, and date of hire is to allow unrestricted access to these data items. Data policy information to enforce this unrestricted access policy (as well as any policies used with the present invention) is preferably stored in a directory database, such as an LDAP database. The stored policy can then be retrieved by sending a message to the database engine, specifying the URI of the desired information, as will be discussed in more detail below. An example URI that may be used to retrieve the “unrestricted” policy information for this example is shown at element 332. Note that XML parameter entity substitution has been used in this example DTD 300, whereby the relatively long URIs 312, 322, 332 are specified as the value associated with shorter entity names 311, 321, 331.

These shorter names are then used within the attribute list declarations, such as “%unrestricted” 355 in the empl\_name declaration 350. This approach has the advantage of reducing the number of characters within the DTD when a URI is used repeatedly, and also makes the attribute list declarations more intuitive and easier to read. (As will be obvious, the URIs may alternatively be replicated throughout the DTD without deviating from the scope of the present invention.) Note that the URIs 312, 322, 332 have been depicted as relative distinguished names (RDNs) for the stored data policy information. These RDNs are simply a unique identifier for storing the object in a directory. Alternative storage techniques (and identifications thereof) may be used without deviating from the scope of the present invention.

Because access to the employee name, serial number, and date of hire is to be unrestricted, the values of these document elements will not be encrypted in the document to be returned to a document requester. Thus, the minimum security strength and community attributes of the policy object stored at location 332 are preferably set to null values (to indicate that encryption is not required).

Another policy used with the employee record example is to limit access to employee’s current salary to the employee himself, any managers of the company, and any employees within the company’s human resources (HR) department. The URI for this policy has been given the entity name “empl\_mgr\_hr” 311, and is specified 385 in the attribute list declaration for curr\_salary 380. The stored policy object located at URI 312 will specify the encryption strength deemed to be appropriate for protecting this employee salary information from unauthorized

access. The community attribute in the policy object will preferably comprise three distinguished name values - one for the individual employee, one for the group comprising all managers, and one for the group comprising all employees in the HR department. (Alternatively, a separate DN entry could be specified for each member of the managers group and/or each member of the HR department, but as previously stated, it is preferable to represent all members of a group by a group DN when the group DN is available.)

The third policy of this example is used with the medical conditions information. Suppose that access to this information is to be restricted to the employee to which it pertains, and any employee working in the medical department. Information for enforcing this policy (including its element visibility restrictions), which has been given the entity name "empl\_medical" 321, is stored at URI 322. The policy is associated with the medical\_condition 390 element by specifying 395 the URI 322 through its entity name 321. The stored policy object located at URI 322 will specify the encryption strength appropriate for protecting the employee's medical condition information, and the community attribute in the policy object will preferably comprise two distinguished name values - one for the individual employee and one for the group comprising all employees in the medical department. (As described above, a separate DN entry could alternatively be specified for each member of the medical group, without deviating from the scope of the present invention.)

The solution used in the preferred embodiments - of specifying a data policy URI within a data element's attribute list declaration - allows one to encode the most complex arrangement

possible, that being a different policy and different element visibility for each data element (even though this situation is likely never to occur in actual use). As can be seen from the example DTD in Fig. 3, the preferred embodiments use standard DTD markups with a special convention. In this manner, processes unaware of the policy convention will still see totally valid XML syntax which passes all standard validation tests when the respective document contains policy markups. A beneficial side effect of this is that if the document generated by a data source uses a URI DTD reference (such as element 405 of document 400 in Fig. 4A, which refers to the storage location of the example DTD 300 of Fig. 3), then an enterprise data policy administrator can cause data policy and element visibility restrictions to be applied to such generated documents simply by modifying the referenced DTD (to add policy definitions and element visibility, or perhaps change the policy definitions and element visibility which have already been added). No change to the code which generates the XML source documents at the data source needs to be made to cause the appropriate encryption and access restrictions to be applied.

By convention, the DTD policy markup of the preferred embodiments uses a fixed attribute (see, e.g., 354 of Fig. 3) from a policy namespace (see 352 of Fig. 3) to indicate the URI of the policy which is to be applied to an XML element. As is known in the art, using a namespace prefix enables differentiation among tags that might otherwise be considered duplicates. Setting a fixed value guarantees that the value of this attribute (such as the value 355 of attribute 353) will be available to the XSL processor whenever it processes the element (such as the empl\_name element 351).

Fig. 4A illustrates a simple source document 400 resulting from retrieval of the employee record information for a particular employee (identified by name at 402 and by serial number at 404), before the processing of the present invention has occurred. This source document 400 contains plaintext information for all document elements of the employee record, including the security-sensitive elements "curr\_salary" 408 and "medical\_condition" 410 (which are to be encrypted using the stored policy objects specified at 385 and 395 of Fig. 3, respectively). The example DTD of Fig. 3 would then be used by an augmented XSL processor, as described below, to apply the desired data policy and element visibility rules to produce a selectively-encrypted version of this document 400 before publishing the encrypted document or sending the encrypted document to the requesting client. Note that there is no policy markup nor any reference to policy in the document 400, and hence, as stated above, there was no need to modify the XML emitter of the document-generating application at the data source.

Skipping for now the discussion of Fig. 4B and proceeding to Fig. 4C, a representative example of a selectively-encrypted document containing the information from source document 400 is shown at 450. Using the policy and element visibility examples discussed with reference to Fig. 3, if the requesting user is the employee 402, this user will be able to recover (i.e. decrypt) the protected values of both curr\_salary 408 and medical\_condition 410 from the encrypted fields 452, 454 (where these fields 452, 454 contain values used for illustrative purposes only) of document 450 which is transmitted in response to his request. In addition, because selectively-encrypted documents are not customized for a particular requesting user according to the present invention, but rather carry sufficient key distribution material to enable access by any authorized

user, employee 402 will be able to recover the protected values 453, 455 from fields 452, 454 even if he was not the original requester of the encrypted document. Similarly, a user who is a manager in this company or who works in the HR department will be able to recover the value 453 of encrypted field 452 if he receives document 450, because these users are within the authorized community for corresponding document element 408, and a user in the medical department will be able to recover the value 455 of encrypted field 454. If a user who is not a manager, is not the individual employee, and does not work in either the HR or medical department receives encrypted document 450, this user will only be able to view the values of unrestricted document elements 402, 404, and 406, even though the values of the curr\_salary and medical\_condition elements are contained within this user's copy of the document 450. The manner in which an augmented style sheet processor applies the data policy and visibility rules to yield these results according to the present invention will be discussed below. (Style sheet processing may perform additional changes to source document 400 in the process of generating an encrypted document, such as formatting the employee record information into a predetermined layout or performing target-specific transformations unrelated to data policy and element visibility, using techniques which are known in the art, and do not form part of the present invention.)

According to the preferred embodiments of the present invention, the process of selectively encrypting a document is implemented as two logical phases. The first phase is referred to herein as the "preprocessing" phase. The augmented DTD 300 described with reference to Fig. 3, a source document such as document 400 of Fig. 4A, and the stored policy

objects and their visibility rules (not shown) are used as input to the preprocessing phase. The second phase is referred to herein as the “post processing” phase. Encrypted document 450, including its embedded key distribution material 460, is generated as a result of the post processing phase.

5 Figs. 5A - 5C show preferred embodiments of the format of records or objects (referred to hereinafter as “objects” for ease of reference) that are created and used during the processing of the present invention to perform the selective encryption technique disclosed herein, and which are also used during the corresponding decryption processes. The content and format of each of these objects will now be described. (The manner in which these objects are created and used during the processing of the preferred embodiments will be described in more detail below with reference to the logic in Figs. 7 - 12.)

Fig. 5A depicts the layout of an object referred to herein as a “key object”. According to the preferred embodiments, one version 500 of this key object is used internally by the encryption processing of the present invention, and a second version 510 is transmitted along with the encrypted object with which it was used. Both versions 500, 510 include one distinguished name (DN) 501. Version 500 of the key object includes an X.509 certificate 502a corresponding to this DN, while version 510 replaces the certificate with a “keyIdentifier” 502b (see RFC 2459, “Internet X.509 Public Key Infrastructure Certificate and CRL Profile”) which can be used to locate the certificate 502a in conjunction with the DN via a directory or other repository. Finally, both versions 500 and 510 include an encrypted symmetric key 503. The X.509 certificate 502a

contains the public key 505 that was used to create the encrypted symmetric key 503 (as will be discussed in more detail below). The entity named in the certificate's "subject" field 504 owns the private key corresponding to public key 505, and can use this private key to decrypt the symmetric key 503. (Note that the value of the certificate's subject field 504 may be different from the value of the DN field 501.) The keyIdentifier 502b is a shorthand "fingerprint" that can be used to identify the certificate 502a to which it corresponds, for example, when searching through the certificates in a key ring or chain, or when searching through certificates returned by a directory or database search. As is well known in the art, X.509 certificates are quite large. Using the shorthand notation 502b when transmitting an encrypted document saves space in the encrypted document, while conveying semantically equivalent information. However, the entire certificate 502a may alternatively be transmitted with the encrypted document, rather than using version 510 of the key object and its key identifier 502b, without deviating from the inventive concepts disclosed herein.

As is known in the art, some secure transmission protocols require one digital certificate for encrypting data, and another for use in creating a digital signature. The preferred embodiments of the present invention assume an SSL session is being used, wherein only a single certificate is needed. It will be obvious to one of skill in the art how the description of the preferred embodiments must be modified when using two different certificates. In such two-certificate cases, the certificate 502a represents the encryption certificate.



Key objects 500, 510 are initially built during the preprocessing phase of the present invention. The encrypted symmetric key value 503 is created in the post processing phase.

Fig. 5B shows the format of an object referred to herein as a “preprocessing key class” object 520. Preprocessing key class objects are used internally by the present invention during both the preprocessing and post processing phases. Each preprocessing key class object 520 comprises an encryption strength identifier 521 (which can be resolved to identify a particular encryption algorithm and a key length, for example by consulting a directory or lookup table), a key class 522, and an unencrypted symmetric key 523. The value of symmetric key field 523 is created during the post processing phase.

Fig. 5C depicts the format of an object referred to herein as a “key class” object 530. A key class defines a community that is authorized to access an element, and the type of encryption to be performed on that element. More than one element may share a single key class, provided the community members are identical among the sharing elements. Each key class object 530 comprises an identification of the key class 531, an encryption algorithm identifier 532 (identifying the algorithm to be used for document elements associated with this key class 531), a key length 533, an optional field 534 specifying any other hints that may be needed to execute the algorithm, and one or more key objects (depicted generally in Fig. 5C as 535, 536, ... 539).

Key class objects 530 corresponding to each preprocessing key class object 520 are built during the post processing phase, and inserted by the post processing phase into the DOM root of the document which has been encrypted using these key class objects.

A key object 535, 536, ... 539 will exist in a particular key class object 530 for each community member within the key class 531. Recall that a key object 500 or 510 is created for each DN 501, and that each such key object includes an encrypted symmetric key 503. Thus, a key class object 530 for a key class 531 having 3 community members will include 3 key objects 535, 536, 539, and therefore will have 3 different encrypted symmetric key values 503 (that is, a different symmetric key value for each community). For the employee record example where the individual employee, managers, and HR department employees comprise the 3 members of the authorized community for viewing current salary information, key class object 530 will include key objects with distinct encrypted keys 503 for each of these members. These 3 different symmetric key values are created from the single unencrypted key value 523 stored in the preprocessing key object 520. The public key 505 from the key object for each community member is used to generate the different symmetric key values. To decrypt the curr\_salary information, the processing on behalf of a member of the managers group locates the managers key object among objects 535, 536, 539 by comparing the managers group DN to DN values 501, retrieves the encrypted symmetric key value 503 from the appropriate key object, and decrypts this symmetric key using the private key for the managers group. This decrypted key can then be used to decrypt the curr\_salary information. Similarly, when a member of the HR department wishes to access the curr\_salary, the DN for the HR group is compared to the DN values in

objects 535, 536, 539 to locate the key object for the HR group. The encrypted key value 503 is then retrieved, and decrypted with the HR group's private key. This decrypted private key is then used by the HR group member to decrypt the curr\_salary value.

It is in this manner that selectively-encrypted documents created according to the present invention securely distribute key material that can be used for decryption by an audience that is unknown at the time of document creation.

The preferred embodiments of the present invention will now be discussed in more detail with reference to Figs. 6 through 12. Fig. 6 provides an overview of the software components used in several of the preferred embodiments. Figs. 7 - 12 depict the logic that may be used to implement the preferred embodiments.

In Fig. 6 there are shown an electronic commerce ("eCommerce") back-end server 605, an electronic commerce infrastructure 625, an electronic commerce client 655 (sometimes also referred to as a server, when acting in its role as proxy on behalf of a browser client), a standard browser client 675, and a program client 680. Three processes are shown in the eCommerce server 605: an XSL preprocessor 610 and an XSL postprocessor 620 according to the present invention, and a transcoding proxy 615. The XSL preprocessor 610 performs the preprocessing phase of the encryption process, and the XSL postprocessor (which may be the same software component as the preprocessor 610) performs the post processing phase. Processes contained within the eCommerce infrastructure 625 include an administrator application 630, a Certificate

Authority 635, an LDAP directory 640, various web servers 645, a message queuing or other transport infrastructure 650, and a group clerk 670. Processes within the eCommerce client 655 include an XML parser 660 (defined by the present invention to decrypt selectively-encrypted documents, as will be described in more detail) and a group client 665. In one embodiment of the present invention, program client 680 is part of eCommerce client 655. Alternatively, program client 680 can be an independent entity analogous to the browser client 675, served by the eCommerce client 655 in its server role.

Note that while several components of Fig. 6 are described in terms of “eCommerce”, this is for purposes of illustration and not of limitation. The present invention may be used advantageously with documents having security-sensitive information that is not commercial in nature.

The function of the eCommerce back-end server 605 is to create selectively-encrypted documents, and in particular, selectively-encrypted XML documents. In the preprocessing phase, the XSL preprocessor 610 queries the directory 640 to obtain the DTD as well as data policies and visibility rules for various document elements. While the preferred embodiments use an LDAP directory as previously stated, it will be understood by those skilled in the art that some other type of directory or data repository could be substituted without deviating from the scope of the present invention; accordingly, an LDAP directory 640 is used for purposes of illustration and not of limitation. The preprocessor 610 also queries the LDAP directory 640 to resolve those policies into a specific encryption strength (e.g. an enumerated value) and a community, and to

obtain the X.509 certificates belonging to community members. At the conclusion of the preprocessing phase, preprocessor 610 passes a working representation of the data, such as a DOM tree representation thereof, to the next processing stage, such as a transcoding proxy 615, if present, for further processing, otherwise directly to the XSL postprocessor 620. The intermediate stage 615 passes its completed output to the XSL postprocessor 620 defined according to the present invention. During the post processing phase, XSL postprocessor 620 contacts the LDAP directory 640 to resolve encryption strength to a specific encryption algorithm and key length (if this information was not directly specified in the policy object), and to obtain a key identifier corresponding to an X.509 certificate. When the selectively-encrypted XML document has been built by eCommerce Server 605, the document is made available to users who may request it (such as by storing it on Web servers 645), sent to other locations using a transport mechanism such as message queuing 650, and so forth.

The transport and storage details are not germane to this invention, other than the observation that since any sensitive parts of the document are now encrypted, there is no need for message queuing or other servers or agents who will handle the XML data to have special encryption support to protect the document's contents; the security-sensitive document elements are already protected. Furthermore, agents that need to examine specific document fields, e.g. for transaction routing purposes, can either be authorized to decrypt only those fields, or those fields can be left in the clear.

10  
15  
20  
25  
30  
35  
40  
45  
50  
55  
60  
65  
70  
75  
80  
85  
90  
95  
100  
105  
110  
115  
120  
125  
130  
135  
140  
145  
150  
155  
160  
165  
170  
175  
180  
185  
190  
195  
200  
205  
210  
215  
220  
225  
230  
235  
240  
245  
250  
255  
260  
265  
270  
275  
280  
285  
290  
295  
300  
305  
310  
315  
320  
325  
330  
335  
340  
345  
350  
355  
360  
365  
370  
375  
380  
385  
390  
395  
400  
405  
410  
415  
420  
425  
430  
435  
440  
445  
450  
455  
460  
465  
470  
475  
480  
485  
490  
495  
500  
505  
510  
515  
520  
525  
530  
535  
540  
545  
550  
555  
560  
565  
570  
575  
580  
585  
590  
595  
600  
605  
610  
615  
620  
625  
630  
635  
640  
645  
650  
655  
660  
665  
670  
675  
680  
685  
690  
695  
700  
705  
710  
715  
720  
725  
730  
735  
740  
745  
750  
755  
760  
765  
770  
775  
780  
785  
790  
795  
800  
805  
810  
815  
820  
825  
830  
835  
840  
845  
850  
855  
860  
865  
870  
875  
880  
885  
890  
895  
900  
905  
910  
915  
920  
925  
930  
935  
940  
945  
950  
955  
960  
965  
970  
975  
980  
985  
990  
995  
1000

An administration application 630 defined according to the present invention (to be discussed in detail below with reference to Fig. 12) interacts with the LDAP directory 640, the certificate authority 635, the browser client 675, the program client 680, the group clerk 670, and the eCommerce client 655 in performing its functions. As will be more fully explained with reference to Fig. 12, the administrator can create, modify, or delete a group; create, modify, or delete an individual entity (such as a browser client 675, a program client 680, an electronic commerce client 655 acting in its capacity as a proxy/server for a browser client 675, or a group clerk 670); assign an entity to a group; remove an entity from a group; reassign, renew, or revoke a certificate for a group or an individual entity; create, modify, or delete a data policy; create, modify, or delete a community definition; create, modify, or delete an encryption strength definition; create, modify, or delete element visibility information in a data policy; or create, modify, or delete a DTD.

XML parser 660 attempts to decrypt selectively-encrypted XML data. For key objects locked using a group key, parser 660 contacts a local group client 665 component. The group client 665 contacts the LDAP directory 640 to locate the clerk defined for the group. Then the group client 665 contacts the group clerk 670 to get the key object deciphered. The group clerk 670 contacts the LDAP directory 640 to ascertain the X.509 certificate(s) associated with the requester and its agents (one or more of the following: the eCommerce client 655 itself acting on its own behalf or as a proxy, the browser client 675, and/or the program client 680). Clerk 670 also queries the LDAP directory 640 to validate whether a given entity is a member of a given

group. In one embodiment of the present invention, the group clerk 670 and the eCommerce client 655 are implemented on the same hardware platform.

The logic with which the preferred embodiments of the present invention may be implemented will now be discussed with reference to the flowcharts in Figs. 7 - 12. Figs. 7A - 7C depict the process with which a document may be selectively encrypted, according to the present invention. In one preferred embodiment, an individual user (who may be an authorized member of at least one community for which the document was selectively encrypted) receives the encrypted document on his client workstation, and executes a decryption process on that workstation. This scenario is illustrated in the logic of Figs. 8A and 8B. In another preferred embodiment, a user's workstation may have insufficient processing power to perform the decryption process of the present invention, or it may be desirable to avoid changing the user's workstation environment such that the code of the present invention can be executed locally, so a client proxy performs the decryption process on behalf of the user. This scenario is illustrated in the logic of Figs. 9A and 9B. In yet another preferred embodiment, the encrypted document is received by a member of a group, where the group may be an authorized member of a community which has access to at least one element of the selectively-encrypted document. The manner in which the decryption process is performed for this embodiment is depicted in Figs. 10A through 10C. In another preferred embodiment, an authorized user such as a systems administrator may need to recover the keys which were used to encrypt a document which may have been stored, e.g., in a company repository maintained for legal purposes. The manner in which this key recovery is advantageously performed according to the present invention is shown in Figs. 11A

and 11B. Finally, Fig. 12 depicts the logic with which an administrator or administration process sets up and administers the secure document system of the present invention.

## ENCRYPTION

The selective encryption process depicted in Figs. 7A - 7C operates in logical phases, as previously described, a preprocessing phase and a post processing phase. During the preprocessing phase (Fig. 7A), data policies and element visibility restrictions are loaded from stored policy objects and analyzed. Standard style sheet processing is then invoked (Fig. 7B) to mark those elements in the source document which require encryption. (Alternatively, the processing of Fig. 7B may be performed by the augmented style sheet processor of the present invention, as an extension of the code written to perform the preprocessing phase.) Finally, during the post processing phase, encryption is applied to the elements which have been tagged and the key distribution material is inserted into the DOM tree for distribution with the selectively-encrypted document (Fig. 7C).

The preferred embodiments of the present invention perform the selective encryption process using an XSL processor that has been augmented to apply data policy and element visibility restrictions, as previously stated. Figs. 7A and 7C illustrate flow charts depicting the additional logic with which this specially-instrumented XSL processor operates. (The logic of the existing XSL processing has not been shown. It will be obvious to one of skill in the art how to incorporate the logic of Figs. 7A and 7C into the existing XSL processor logic.)



1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000

The purpose of the preprocessing phase depicted in Fig. 7A is to determine the elements of the source document to be encrypted, and to build the key classes to be used during the encryption process. The processing of this phase begins at Block 700, and operates upon a particular source document (such as document 400 of Fig. 4A). This process may be invoked in response to a client request for the document (as part of the process of returning the requested document to the client), or in advance of such a request (where the resulting encrypted document will then be stored to await a subsequent client request). Note that references herein to a requesting “client” refer equally to the case where the response is to be delivered for rendering to a human user or where the response is to be delivered to an executing application program or process.

In Block 700, the policy-enhanced DTD for the source document is retrieved from a directory or other storage repository. The preferred embodiments assume that data policy is stored in a repository (such as the LDAP directory referenced by policy URIs 312, 322, 332 of Fig. 3) as executable policy object code. Using the examples of Figs. 3 and 4, the document being processed is source document 400 of Fig. 4A. The DTD reference 405 is located by the processing of Block 700, and this reference 405 is used to retrieve the DTD 300. Block 705 then retrieves an element definition (such as the empl\_name definition 350) from the DTD. Block 710 retrieves (using the URIs such as 312, 322, and 332) and instantiates the policy object referenced from the DTD element definition.

5 A policy object is preferably written for each specific element type to be processed, whether the element is to be encrypted or not. As defined in the referenced invention, each policy object preferably operates by specifying executable code to overload existing XSL processor methods, and is written to be executed as a “plug-in” to the XSL processor (wherein the plug-in concept is well known in the art). In particular, the preferred embodiments overload the XSL “value-of” method. Preferably, this overloading will be done by subclassing the existing value-of method (where the technique for subclassing a method is well known in the art). References to values are then intercepted during the style sheet application process (Fig. 7B), and these intercepted values are passed through to the policies instantiated in Block 710. The encryption attributes and techniques defined in the present invention may be used in addition to, or instead of, the attributes and techniques defined for policy objects in the referenced invention whereby the value of an element could be altered (e.g. by changing numeric values to text, suppressing elements and values, etc.) during style sheet processing. (Note that it may be desirable to create an audit log during this processing, to reflect the original data values encountered as well as the data resulting from such value alterations. Techniques for creating audit logs are well known in the art, and do not form part of the present invention.)

20 Each policy object used by the preferred embodiments of the present invention preferably includes a method or attribute that specifies the minimum security strength required for encrypting the document elements with which this object is to be used, and the members of the community authorized to view (i.e. decrypt) the value of this document element. The programmer creating the policy object code is responsible for specifying this strength and community information. The

community may be specified statically, by including a list of the DNs of its members who can be determined in advance, and/or executable code may be written in the policy object to determine one or more DNs of community members dynamically. When a group is to be specified as a community member, the programmer will preferably specify a DN of the group (if one is available); otherwise, the DN of each member may be (statically) specified, although this latter approach results in more time-consuming execution during the encryption and decryption processes, and does not respond to additions or changes in group membership unless the statically-specified list in the policy object is updated. Or, code may be written in the policy object to dynamically locate and return the DNs of each member of a particular group.

Block 715 asks whether this policy object specifies encryption of its associated data elements. This may be determined by invoking a method that returns an attribute value specifying the minimum encryption strength required, where a null value indicates that encryption is not required and a non-null value indicates that encryption is to be used. Alternatively, a method may be invoked which returns a Boolean attribute value which has been set specifically (that is, without regard to the encryption strength attribute) to indicate whether encryption is required. If the test at Block 715 has a negative result, control transfers to Block 720 to see if this was the last element definition. If it was, then the processing of Fig. 7A ends, and control continues to the processing of Fig. 7B. If this was not the last element definition, control returns to Block 705 to read and begin processing the next element definition.

Control reaches Block 725 when the test in Block 715 has a positive result. Block 725 retrieves the community information associated with this policy object, preferably by invoking a method such as "communityMembers" which returns a list of distinguished names. In the employee record example used in Figs. 3 and 4, the policy object for the "empl\_mgr\_hr" policy may use statically specified DNs for the manager and HR groups, but must include executable code to dynamically determine the DN for the particular user whose information is represented in document 400. The static DNs may be specified within the stored policy object in a format such as:

DN= "cn=managers,ou=groups,o=acme" for the manager group, and

DN= "cn=hr,ou=groups,o=acme" for the HR group.

A DN for an individual user (such as a systems administrator) may also be statically specified, using a syntax such as:

DN= "cn=admin,ou=users,o=acme"

By inspection of the syntax of these examples, it can be seen that the distinguished names are structured with an organization entry for Acme company ("o=acme") at the root level, where the root level is further divided into "users" and "groups" at the organizational unit ("ou") level, and where the "groups" level is then further divided to have entries for "managers" and "hr" at the common name ("cn") level. The DNs for a group such as the managers group and HR group may be used to retrieve DNs for each member of those groups using techniques which are well known in the art and do not form part of the present invention. Using this same format, the DN for the medical department used in the "empl\_medical" policy object may be specified within the stored policy object as:

DN= "cn=medical,ou=groups,o=acme"

where the "groups" level also has an entry for a group denoted as "medical".

A DN for an individual user that is dynamically retrieved has a similar syntax to that used for statically specified DNs. Depending on how the registry of DNs is organized, the user's DN in the employee record example may be located using his name and serial number, or perhaps just his serial number, etc. The executable code in the policy object must therefore scan the source document 400 (or other information source such as a request header with which the source document was requested, as appropriate) to locate the value(s) to be used (such as searching for the values of the "empl\_name" 402 and/or "ser\_nbr" 404 tags).

Block 730 compares the list of distinguished names for all members of this community to the lists of DNs of community members in the existing preprocessing key class objects (where each DN 501 is contained in a key object 500 within a key class object 530, this key class object 530 being represented at field 522 of each preprocessing key class object 520).

If a preprocessing key class object 520 is not found which already contains this community (a "No" result at Block 735), then a new preprocessing key class object is created (Block 740). The encryption strength field 521 of object 520 is set to the value of the minimum strength attribute of the policy object retrieved in Block 710. The unencrypted key value 523 is preferably set to a null value, indicating that it has not yet been initialized. A key class object 530 is then created, and used as the value of field 522. The identifier 531 to be used for the key class is

preferably generated as a sequentially-increasing numeric value. Fields 532, 533, 534 are preferably set to null values at this point: the actual values will be determined during the post-processing phase. A key object 535, 536, ... 539 is then added to key class object 530 for each community member. Preferably, the DN for each community member will be used to search already-created key objects 500. If a match is located, the existing key object 500 (having the community member's DN in field 501, the community member's X.509 certificate in field 502, and a null value in field 503) will be used in the key class object 530. Otherwise, when a matching key object does not already exist, one must be created. The DN for the member will be used to retrieve the member's X.509 certificate. The new key object 500 will be created by setting field 501 to the member's DN, field 502a to the retrieved certificate, and field 503 to a null value.

Upon reaching Block 745, either a new preprocessing key class has been created for the community, or an existing preprocessing key class for the community has been located. Block 745 then associates this preprocessing key class object 520 with the policy object retrieved in Block 710. Block 750 replaces the encryption strength field 521 with the most restrictive of (1) the minimum required strength from the policy object and (2) the existing value of field 521 (referred to in Block 750 as the element's strength and the class's encryption strength, respectively). Encryption strengths may be represented as numeric values, where a higher number indicates a stronger encryption strength (see U. S. Patent \_\_\_\_\_, serial number 09/240,387). In this case, Block 750 chooses the larger of the two numbers. The preprocessing key class object now contains the encryption strength needed by the element of class 531 that has the strongest encryption requirement. (This may result in over-encryption of some elements, which is

acceptable.) Control then transfers to Block 720, to determine whether there are more element definitions to be processed.

The processing of Fig. 7B begins upon completion of the processing of Fig. 7A. This processing may occur as part of the augmented XSL processor of the present invention, or may be performed by a transcoding proxy of the prior art (see the description of a transcoding proxy 615 in the discussion of Fig. 6, above). Block 752 applies a style sheet rule to the source document 400. When the pattern of a style sheet rule matches an element of the source document, Block 754 asks whether this template calls the existing XSL value-of method. If not, processing of the rule continues according to the prior art, and control transfers to Block 759. According to the present invention, the value-of method is preferably invoked for each element in the source document, in order to apply selective encryption to each element as needed. This may be accomplished by applying a style sheet that copies all input values to an output document being generated. When the value-of method is invoked by the template rule, Block 756 retrieves (i.e. obtains a pointer or reference to) the previously-instantiated data policy object for the data element which has matched the template rule. The overriding value-of method of this data policy object is executed at Block 758, performing any appropriate transformations that have been coded within this method. According to the present invention, the code of the overridden value-of method is written to determine whether the policy object specifies that the data element is to be encrypted (as described above with reference to Block 715), and if so, to insert encryption markup tags around the element. The encryption markup tags preferably use a syntax such as "<encrypt:data class = 'n'>" and "</encrypt:data>" (as illustrated in Fig. 4B at 422 and 424),

where the value of “n” is set to the identifier of the key class object that was associated with this policy object in Block 745 of Fig. 7A. This process of applying style sheet rules to mark up the source document 400 is repeated by iterating Blocks 752 through 759 until the source document has been completely processed (i.e. until the test at Block 759 has a positive result), after which the processing of Fig. 7B ends.

Fig. 4B illustrates an example of the result of completing the processing of Fig. 7B upon source document 400. Note that the content 420 of Fig. 4B represents interim information which is created and used internally. The information is never exposed in this form. (See Fig. 4C for an illustration of the information that is exposed externally.) Markup tags 422 and 424 have been inserted to bracket the security-sensitive values of the curr\_salary and medical\_condition document elements. A first key class is to be used for encryption of the curr\_salary value, and a second key class is to be used for the medical\_condition value, as indicated in the markup tags at 423 and 425, respectively. Fig. 4B further illustrates the organization of these key class objects. As shown at 430, key class “1” has an associated algorithm and key length, and includes key objects 431, 432, 433 for the three members of the associated community. Key class “2” is similar, using a different algorithm and key length (see 440), and specifying key objects 441, 442 for two community members.

Note that the “tempkey” elements 434, 444 of Fig. 4B depict examples of the unencrypted symmetric key that will be used to create a different encrypted symmetric key 523 (shown in Fig. 4B and 4C as the values of “Ekey”) for each community member of the associated key class.



Note also that the KeyIdentifier values and these Ekey values depicted in the key classes (in both Figs. 4B and Fig. 4C) are merely to allow visual representation. In an actual implementation, this information is preferably encoded as binary values using "base 64" rules as known in the art, such that the result contains only printable characters that are allowed in the context of XML attribute values.

Fig. 7C depicts the post processing phase of the selective encryption process. This logic is invoked upon completion of the processing of Fig. 7B. The object of the post processing phase is to replace certain DOM elements with encrypted elements, and to insert the key objects necessary for decryption into the DOM root. Fig. 4B represents, without DOM tree structure, the interim document format 420 upon which the post processing phase operates.

As indicated in Block 760, the DOM tree corresponding to the document being encrypted is scanned in a predetermined order. According to the preferred embodiments, this order is defined to be the standard sequence for sending the DOM in an output stream. Having a predetermined order is required for the preferred embodiments, which use cipher block chaining in which the output of each block encryption serves as key material for the next block encryption. (If the order of scanning the DOM were varied rather than using a predetermined order, the receiver would be unable to decrypt the data as it would be unable to construct the interim keys.) Cipher block chaining (CBC) mode is preferred for use in the present invention over a non-chained mode to foil certain kinds of cryptographic attacks. Likewise, CBC is preferred over a stream cipher, to disguise the length of the encrypted fields, so as to thwart other types of

cryptographic attacks. However, an alternative cipher mode such as a block cipher or stream cipher, performed on a per-element basis, may be used without deviating from the inventive concepts of the present invention.

Block 765 checks the element tag which has been parsed by Block 760 to determine whether this tag was marked (by Block 758 of Fig. 7B) as requiring encryption. If not, then control transfers to Block 798, bypassing the encryption process of Blocks 770 through 795. Otherwise, when the element tag indicates that the element is to be encrypted, processing continues to Block 770. Block 770 reads the key class from the element tag, such as the value "1" specified at 423 in the encryption tag 422 of Fig. 4B. Block 770 then checks to see if this is the first element to be processed for this key class. One way in which this determination can be made is to inspect the symmetric key value 523 of the preprocessing key class 520 in which the identifier 531 of the current key class is located (within field 522). If the symmetric key value 523 is null, then this key class has not yet been processed, and Block 770 has a positive result. Many alternative techniques may also be used, such as maintaining a lookup table of the key class identifiers for those key classes which have already been encountered.

Blocks 775, 780, and 785 perform setup operations for each new key class being processed. Block 775 initializes the encryption process for this key class. This initialization begins by resolving the required encryption strength 521 from the respective preprocessing key class object 520 into a specific algorithm and key length (if this information was not directly specified in the policy object). Preferably this resolution is done by consulting an LDAP directory

as taught by previously-referenced U. S. Patent \_\_\_\_\_ (serial number 09/240,387), but the exact means of determining an algorithm and key length to provide a particular encryption strength is immaterial to this invention. The resolved algorithm and key length are stored in the key class object at 532 and 533, respectively. Next, a random symmetric key of the determined length is generated and inserted as the value of field 523 of preprocessing key class object 520. (Note that the post processing phase of the present invention does not expose this random symmetric key in clear text to other processes.) Furthermore, this random symmetric key 523 is then used to initialize (see Block 790) the first iteration of the cipher block chain for this key class, using techniques which are well known in the art. This process may also involve inserting a string of random bits, called an initialization vector, before the first bit of the data to be enciphered.

Block 780 encrypts the generated symmetric key 523 separately for each community member (that is, for each distinct DN within the community) authorized to view the associated document element. This is performed by accessing each key object 510 (as stored in field 535, 536, ... 539 of key class object 530) defined for the current preprocessing key class, and for each key object, (1) retrieving the public key 505 from the X.509 certificate 502a, (2) using this public key 505 to encrypt the symmetric key 523 using the encryption algorithm and key length stored at 532 and 533, respectively, and (3) storing the resulting encrypted key in field 503 of the key object. This will result in one encrypted copy of the symmetric key per community member having a separate DN 501 and X.509 certificate 502a. (In other words, when a community member is a group representing multiple individuals, then one encrypted copy of the plaintext

symmetric key 523 is generated for the entire group and is associated with the group's DN.) To save space, the preferred embodiments then replace the X.509 certificate 502a with its corresponding KeyIdentifier 502b, which in combination with the distinguished name 501 allows identification of the specific certificate which was used during encryption.

5           Block 785 then inserts the key class object 530 into the root of the DOM, as illustrated by the presence of key class objects 461, 462 in the what may be considered the root area 460 of the output document 450 of Fig. 4C.

At Block 790, the element value read by Block 760 is encrypted using the plaintext symmetric key 523 (e.g. having a value similar to that shown for "tempkey" 434 in Fig. 4B), the encryption algorithm as identified by 532, and the key length 533 for the element's key class 531. If this is the first element being encrypted using a given key class, the initialization vector created in Block 775 will be used as input to the encryption algorithm; otherwise, material resulting from the previous CBC operation for this particular key class is used.

15           Note that it may happen that an element to be encrypted has other elements nested within it (i.e. as child elements) which also have a policy specifying encryption. To handle this situation, the post processor preferably scans the entire subtree it is about to encrypt, to determine if such nested elements exist. If so, the post processor then preferably determines the most restrictive type of encryption that applies to all elements of the subtree. The enclosing tags of the encrypted subtree represent the key class associated with this highest-level encryption strength, and any

encryption tags that have been inserted around nested elements are removed. The entire subtree is then encrypted using this highest-level approach. Responsibility falls on the policy administrator who defines the security policies to ensure that this type of processing will not result in encrypting for the wrong community, or encrypting the subtree using the wrong algorithm. As will be obvious, the policy administrator must understand the semantics of the data to be processed in order to properly assign the element visibility.

While the selectively-encrypted document example shown in Fig. 4B depicts the element tags as having been left unencrypted, it may happen in a particular situation that it is desirable to encrypt the tags themselves as well as the data value(s) enclosed by the tags. To accommodate this possibility, the associated policy object may be written such that it places the encryption tags (see 422, 424 of Fig. 4B) surrounding the element tags rather than surrounding the element value.

It is possible that an element to be encrypted may be shorter than, or equal to, or longer than the block length used in the CBC process. If the data to be encrypted exceeds the block length, this step of the algorithm creates multiple blocks. If the data to be encrypted (plus the initialization vector) is not an even multiple of the block size, non-significant padding bits may be added at the end of the element, resulting in the last block for any given element containing zero or more padding bits. Normally a CBC has padding bits only at the end of the last block of data. However, in the present invention because each element is encrypted in a separate operation, padding bits may be present at the end of the last block for each encrypted element. Alternatively,

well-known methods such as ciphertext stealing may be used to create a final ciphertext block that is shorter than the block length.

The encrypted element is then tagged to indicate that it has been encrypted (Block 795), using a syntax such as has been previously described (see 452, 454 of Fig. 4C) where the key class identifier 531 is included as an attribute of the tag for use in a subsequent decryption process. If the element contains padding bits, the number of padding bits may be indicated via an attribute on the encrypted element, or by preceding the plaintext data with a length field prior to encryption. (Note that this particular key class is necessarily one of the key classes such as 461, 462 in the document's DOM root, having been inserted therein by Block 785.) The key class information from the DOM root is required for the decryption process. Further note that when the document (such as document 450 of Fig. 4C) being generated is an XML document, the new objects and their associated tags (such as the key classes 461, 462, the encrypted data tags 452, 454, etc.) which will be transmitted in this document according to the present invention appear as elements of the data policy name space (e.g. by using "encrypt:class" rather than simply "class" for key class objects 461, 462) in order to prevent ambiguous interpretation or unintended processing of these objects and tags.

Block 798 then checks to see if the end of the DOM stream has been reached. If so, then the selective encryption process is complete, and the output document 450 is ready for secure storing or secure transmission, and Fig. 7C ends. Otherwise, control returns to Block 760 to read the next element from the DOM stream.

A number of different preferred embodiments are defined herein for decrypting the selectively-encrypted document created by the processing of Figs. 7A through 7C. As has been stated, each decryption process preferably operates as part of an augmented XML processor. Each preferred decryption embodiment will now be described in turn.

5

#### FIRST PREFERRED EMBODIMENT FOR DECRYPTION

In one preferred embodiment, an individual user (equivalently, a single application program or process having its own DN) receives the encrypted document on his client workstation, and executes a decryption process on that workstation. The logic with which this preferred embodiment may be implemented is depicted in Figs. 8A and 8B. (This preferred embodiment ignores the case where a user may be an authorized community member by virtue of being a member of a group, where that group is defined as a community member. The logic used to process a user as a group member is discussed below, with reference to Figs. 10A - 10C. Although this embodiment discusses the processing of document receipt for an individual who is not a group member as being separate from the logic from used to process a group member, it will be obvious to one of skill in the art that the logic for these cases can be combined in a particular implementation. In particular, logic - such as that described below beginning at Block 1006 - may be inserted following a negative result in Block 825, also discussed below, to determine whether the user is a group member.)

20

At Block 800, the user has received a document (such as the document represented at 450 of Fig. 4C) which has been selectively encrypted. This document may have been received in

response to a request by this user. Or, it may have been forwarded to this user by another user or process, as part of a group collaboration effort. Provided that this user's public key was used to encrypt at least one of the encrypted elements of the document, the user will be able to access that security-sensitive information, regardless of whether the document was originally created for this user. Block 805 reads a key class object (such as key class object 461 or 462) from the DOM root of the received document (where the augmented XML processor has created a DOM tree representation of the received document). If no such key classes exist, then this received document has not been selectively encrypted using the present invention, and the document may be rendered using processes outside the scope of the present invention. Block 810 checks to see if this user's DN appears in one of the key objects for this key class. In the employee record example, assuming an employee's DN uses his serial number for the value of the CN field, the employee named John Q. Smith and having serial number E135246 (see 402, 404 of Fig. 4A) would locate his DN at key object 465, and thus Block 810 would have a positive result.

When Block 810 has a positive result, processing continues at Block 815 where the encrypted symmetric key is retrieved from this key object which has a DN matching the user's DN. (Referring to Fig. 5A, the encrypted key 503 is being retrieved from an object having the format depicted at 510.) The user's private key is then used to decrypt this encrypted symmetric key at Block 820. Recall that the user's public key was used to encrypt this key at Block 790 of Fig. 7C, and thus if this user is the proper holder of the public and private key pair, the decryption process will succeed; otherwise, if the user does not hold the private key corresponding to the



public key used at Block 790, then this user will be prevented from accessing the security-sensitive elements within the key class being processed.

Block 825 is reached following completion of Block 820, and following a negative result at Block 810. Block 825 checks to see if there are any more key class objects in the DOM root of the received document. The user may be authorized for decrypting more than one key class, as in the case of the employee in the employee record example where the employee is to have access to all encrypted information (and will thus be set up as an authorized community member for every key class used to encrypt the document). If Block 825 has a positive result, then control returns to Block 805 to process the next key class object; otherwise, all keys for which this user is authorized have been recovered, and the encrypted document will now be processed.

Block 830 reads an element of the DOM, proceeding in the same stream order as was used in the encryption process in order to reverse (i.e. decrypt) the cipher block chaining operations. Block 835 asks whether the element just read is encrypted, as determined by the presence of an encryption tag such as the tag in 452 of Fig. 4C. If not, then Block 840 adds the plaintext element to an output buffer being created. Block 845 checks to see if the end of the DOM stream has been reached. If not, control returns to Block 830 to process the next document element. If, on the other hand, Block 845 has a positive result (i.e. the document has been completely processed including decryption of those encrypted elements for which the user possessed the required private key), the contents of the output buffer are used to render the

document elements from the output buffer (Block 850) using techniques which are known in the art. The processing of Fig. 8A then ends.

Returning to Block 835, if this test has a positive result (i.e. the element is encrypted), then an attempt will be made to decrypt the element value using the logic shown in Fig. 8B. First, the key class identifier is retrieved from the key class attribute (Block 855). Then, Block 860 checks to see whether this user recovered a symmetric key for that retrieved key class. If so, then Block 865 asks whether this is the first element decrypted in this key class. If this test has a positive result, Block 870 indicates that the initialization vector that was inserted according to the CBC of the prior art is discarded. If this test has a negative result, then the results of the previous decryption for that key class are used to initialize the decryption algorithm. Block 875 then uses the key which was decrypted at Block 820 for that key class, along with the cipher block chaining input, to decrypt the encrypted element. Processing returns to Block 840 of Fig. 8A, where the decrypted value is appended to the output buffer. If the user did not recover a key for this key class, however, then Block 880 indicates that a substitute value may be used, such as "Element cannot be decrypted". Control returns to Block 840 of Fig. 8A, where this substitute value is appended to the output buffer.

This approach of supplying substitute text (see Block 880) is used in the preferred embodiments rather than returning garbled information to be rendered to the user, or passing unintelligible (i.e. still encrypted) data to an application program. Other techniques for providing substitute text may also be used. For example, the encryption strength (e.g. "Classified", "Top

Secret", etc.) associated with the element may be indicated in place of the value which could not be deciphered. Or, an indication could be provided visually to indicate that the element was "censored" using an appropriate visual indication, or the encrypted value might simply be passed through for possible decryption by another processing entity. Alternatively, it may be desirable in a particular implementation to simply omit all reference to the element from the output document. However, use of this substitution approach or any particular representation thereof is an optional feature of the present invention, and may be omitted without deviating from the scope of the present invention.

## SECOND PREFERRED EMBODIMENT FOR DECRYPTION

Another preferred embodiment is defined for the situation where either (1) a user's workstation has insufficient processing power to perform the decryption process of the present invention, or (2) it is desired to avoid program code changes on the client workstation. Thus, a client proxy performs the decryption process on behalf of the user (or on behalf of an application executing on the user's workstation). The logic with which this preferred embodiment may be implemented is depicted in Figs. 9A and 9B. The user in this scenario uses a standard Web browser client application (such as browser client 675 of Fig. 6) executing on his workstation or a standard program client (such as program client 680), and requests a selectively-encrypted XML document from a proxy (such as client proxy 655) acting on behalf of the browser client. Through use of this client proxy 655, this preferred embodiment enables serving selectively-encrypted document content to browser clients 675 or program clients 680 without requiring any program changes or additional software operating on the client device.

Fig. 9A depicts the preferred embodiment of an initialization process performed by client proxy 655 (referred to equivalently as a server) to enable the proxy 655 to access selectively-encrypted documents on behalf of a standard browser client 675 or a program client 680; Fig. 9B then illustrates the preferred embodiment of the logic with which this proxy decrypts the content (if authorized to do so) and serves the decrypted content over a secure session (such as an SSL session) to that client. The description of Figs. 9A and 9B will be in terms of the proxy 655 acting on behalf of the browser client 675; however, it will be apparent to one skilled in the art that this logic applies also to a program client 680. (The processing within the client is not depicted for this embodiment, as the client processing uses techniques which are known in the art: the novel functions whereby a selectively-encrypted document is served according to the present invention operate on the client proxy in this embodiment.)

First the user of browser 675 tries to access a specific Web page. The server 655, upon receiving this request at Block 900, ascertains browser 675's capabilities (e.g. by inspecting the request header fields, as is known in the art). At Block 902, if the browser 675 is capable of an appropriate level of encryption, an encrypted connection with mutual authentication (referred to in Figs. 9A and 9B as an SSL session for ease of reference, although alternative protocols such as TLS may also be used) is established between the browser client and proxy. (The purpose of establishing a secure session between the browser and proxy is to enable the proxy to perform decryption of security-sensitive information on behalf of the client, and then to return that decrypted information to the client using the secure session, thereby protecting the decrypted

information from exposure to other parties.) Otherwise, a connection without SSL is established.

Block 904 tests whether a mutually-authenticated SSL session with encryption was established. If it was, processing continues at Block 906; otherwise, processing continues at Block 922. At Block 906, the proxy 655 examines the client's certificate (which was passed during the SSL session establishment, according to the prior art). A number of tests may be performed on this client certificate using techniques which are known in the art, such as: determining if it has expired; determining whether the chain of trust back to the root authority can be validated; etc. If the certificate is OK, at Block 908 server 655 searches the LDAP directory 640 (or other repository) for the client's certificate to obtain the associated DN. If the tests performed at Block 906 indicate problems with the client's certificate (e.g. the certificate is expired), control may optionally transfer to Block 920 to attempt to fix the certificate problem, as will be described below. (Alternatively, the server 655 may simply reject the client's request such as by returning an error message when Block 906 has a negative result, after which the processing of Figs. 9A ends. Fig. 9B will not be invoked in this situation, as the client proxy is not able to serve a secure document to this requesting user.)

Block 910 checks to see if the corresponding DN was found. If so, the server 655 may optionally perform the processing at Blocks 912 and 914. This optional processing comprises first testing at Block 912 to see if the certificate will expire soon ("soon" as may be defined by a systems administrator or installation policy, which information is accessible to server 655, e.g., as policy information stored in a database or in an LDAP directory 640). If the certificate is expiring

soon, this optional processing continues at Block 914 where (assuming the user's certificate was issued by a local certificate authority, and a reauthorization request for this soon-to-expire certificate has not already been issued) the server 655 queues a reauthorization request (see 1270 of Fig. 12) to the administrator application 630 but continues processing on behalf of the client 675. Finally, when either the optional processing of Blocks 912 and 914 has completed or when this processing has been omitted, the server 655 saves (Block 916) the user's DN with the SSL session context for future reference (see the description of Block 974, below). Block 917 then checks to see if a URL for a selectively-encrypted document is already available, e.g. from the client's request in Block 900. If so, then control transfers to Block 942 of Fig. 9B; otherwise, the server 655 preferably builds a custom "https" Web page (i.e. a secure hypertext transport protocol Web page to be transmitted over the secure session) for the user 675 at Block 918, such as a menu showing secure documents that user 675 may request. Alternatively, the server 655 may simply present a query menu such as a database front end to the user in Block 918, allowing the user to search for particular selectively-encrypted documents which are available. After the processing of Block 918 completes, control transfers to Block 940 of Fig. 9B to serve a selectively-encrypted page to the requesting user.

Returning now to the discussion of Block 904, if an SSL session was not established (e.g. the client 675 did not have a certificate), an optional procedure may be performed whereby the server 655 attempts to gather information for creating a client certificate. This optional procedure comprises Blocks 922 through 932, and begins with the server displaying a registration form (Block 922) to solicit the entry of necessary identification data from the user. The user enters the

requested information at Block 924 (for example, name, organization, telephone number, e-mail address, employee number, credit card number), which can later be independently verified by the administrator 630 in the process that is described below with reference to Fig. 12. (It will be understood that the specific registration identification data to be collected and validated will differ according to the needs of a particular installation. Such organizational policies may be established and enforced through the use of an LDAP directory 640.) The server 655 then assigns user 675 a distinguished name and certificate (Block 926). Note that at this time, the new certificate is not yet associated with any access privileges. It simply enables the user 675 to be uniquely identified as associated with the assigned DN on subsequent visits, by proving his relationship to the certificate associated with his DN using a digital signature. At Block 928, the server 655 stores (e.g. in the LDAP directory 640) the user's data entry (from Block 924), DN, and certificate for future reference.

At Block 930, the server 655 creates a "new user approval request" (see 1290 of Fig. 12) using the registration information which has been obtained, and places this request into the administrator's work queue (see 1200 of Fig. 12) for later processing. Finally, at the completion of this optional processing, a default secure Web page may be displayed (Block 932) to the new user, where this default page may display a message such as "Welcome to the secure document server system. You will be contacted by e-mail when your access privileges have been granted." The processing of Fig. 9A (and also Fig. 9B, as the client proxy cannot yet decrypt a secure document on behalf of this user) is then complete.

Returning now to the discussion of Block 906, if a secure session was established, but problems were found with the client's certificate, then a further optional feature of this preferred embodiment may be performed by transferring control to Block 920 from Block 906. Block 920 checks to see if any previous registration data exists for this client (e.g. in LDAP directory 640).  
5 If not, then the optional processing previously described for Blocks 922 through 932 may be performed (or, processing may simply end). If previously-existing data is found, then according to this optional feature the server 655 may proceed by creating a reauthorization request that will use this existing information, and control transfers to Block 930 (discussed above) to queue this request for processing.

The optional feature just described with reference to Block 920 may also (optionally) be invoked from Block 910, when the search for the client's DN does not complete successfully. When Block 910 has a negative result, it is known that the client had a valid certificate (a "Yes" result at Block 906), but that no DN matching this certificate was found in the LDAP directory 640 or other repository which was searched at Block 908.

15 It is well known in the art that proliferation of digital certificates is becoming a problem, causing confusion among users and eventually leading to scalability problems due to the number of certificates required to be stored, accessed, renewed, etc. for each client. Thus, the optional processing of Block 920 which attempts to locate and use previously-existing registration  
20 information may be provided in an implementation of this preferred embodiment with the goal of enabling a user with an existing valid certificate (or one that may have expired, and merely needs



to be renewed, as is the case when this processing is invoked in response to a negative result at Block 906) to be added to this secure document system without necessarily issuing the user a new certificate. Therefore, when this optional processing locates existing registration information (a “Yes” result at Block 920), this existing information is used to prepare a work request for the administrator (as described above with reference to Block 930), requesting the creation of a new entity (see 1290 of Fig. 12).

Fig. 9B depicts the processing with which the client proxy 655 decrypts and serves a selectively-encrypted document to a client 675, after the processing of Fig. 9A has been performed. The user 675 chooses a selectively-encrypted document at Block 940 (e.g. such as from the menu displayed in Block 918). The server then retrieves this requested document (Block 942). (Note that control also reaches Block 942 following a positive result at Block 917 of Fig. 9A.) The augmented XML preparer 660 operating on the server 655 now reads the DOM representation of the document (Block 944) in stream order (to align with the order in which the document was parsed during encryption) for an element encrypted according to the present invention. If the element located at Block 944 is not encrypted (a “No” result at Block 946), the server proceeds to Block 966, where the plaintext data is appended to an output buffer. Otherwise, when the element is encrypted (a “Yes” result at Block 946), the proxy 665 will attempt to decrypt this element on behalf of the client 675.

The process of decrypting an element on behalf of the client 675 begins at Block 948, where the proxy 665 expands the group membership of those DNs which represent groups in the

key class of this element. Referring to the example document in Fig. 4C, the processing of Block 948 comprises locating the key class identifier 456 when processing encrypted element 452, then finding the DN's of groups 471, 473 from the key objects within the key class 461 having the identifier 453 (see 463) which is located on the encrypted element tag, and then determining the membership of these groups having common names "managers" 470 and "hr" 472. When an LDAP directory is used for storing group membership information, as has been described, determining the membership comprises issuing an LDAP command for each DN assigned to a group, where that command retrieves the DN's of the individual members of the group. (As will be obvious, when a data repository other than a directory is used for storing group membership information, the retrieval command appropriate to that repository is used.) Alternatively, a query can be performed in the form of "Is this (individual DN) a member of this (group DN)?".

After expanding the groups in this key class, Block 950 asks whether the user on whose behalf the proxy is operating is a member of any of these groups. If not, control transfers to Block 964 where a message is preferably generated (rather than using the still-encrypted element, as discussed above with reference to Block 880) and appended (Block 966) to an output buffer, indicating that the element could not be decrypted. When the user is a member of at least one authorized group, processing continues at Block 960.

Block 960 locates the clerk for the group (or, if the user is a member of multiple groups authorized for this key class, the clerk of any such group), where the clerk is the holder of the private key for the group. When using an LDAP directory, this comprises querying the LDAP

directory using the group DN for the group identified in the key object, requesting the DN for the group's clerk. If the group clerk is found (Block 962), then control transfers to Block 972; otherwise, the absence of a group clerk dictates that the element cannot be decrypted on behalf of the group member, and a substitute element to this effect is appended to the output buffer in Blocks 964 and 966.

At Block 972, the proxy preferably establishes a secure SSL (or other mutually-authenticated protocol) session to the group clerk. Block 974 then requests the clerk to decrypt the encrypted symmetric key from the key object establishing this user as an authorized community member. This request to the clerk comprises passing the key object containing the encrypted symmetric key, the proxy server's certificate, and the DN of the user. (Note that the proxy should be contacted only once for a particular key class for which a symmetric key is needed during decryption of a document.) Preferably, this information will be digitally signed before passing it from the proxy to the clerk, such as by signing a message digest with the user's private key corresponding to the user's X.509 certificate. Signing can prevent a man-in-the-middle attack or a replay attack. (Various signing methods known in the art may be used without departing from the scope of the present invention.) When a mutually-authenticated secure session (such as an SSL or TLS session) is being used between the proxy and clerk, digitally signing the transmitted information is not strictly necessary, as the encrypted session provides equivalent data integrity. In one aspect of this preferred embodiment (further discussed with reference to Block 982, below), the element to be decrypted is also part of the signed information passed to the clerk. (Recall that the user's DN was saved during the processing of Block 916.) Referring to the

document 450 in Fig. 4C, suppose the user has been determined to be a member of the “managers” group 470, 471. In that case, the key object 464 is passed by Block 974 to the clerk for the managers group, requesting the clerk to decrypt key 475.

Block 976 represents processing by the group clerk, where the clerk checks to see if the user and proxy server are both members of the authorized group. (Note that the proxy server should be an authorized group member, as it will have access to the decrypted security-sensitive information if the decryption process completes successfully. Furthermore, the proxy may be specified as a group member of a community, using a syntax similar to 470, 471 of Fig. 4C where the “managers” value 470 is replaced by a value such as “proxy” or “proxies”. If the clerk detects during Block 976 that this group syntax has been used to specify the proxy, then the proxy group must be expanded - as described above for Block 948 - to verify that the proxy is indeed an authorized community member.) When the information passed to the clerk has been digitally signed (during the processing of Block 974), the verification process performed in Block 976 by the clerk preferably also comprises verifying the digital signature (using techniques which are well known in the art) to ensure that the requester is the true source of the request, and that the information has not been altered since its signing - although this verification may be omitted if the information was received on a mutually-authenticated secure session. If Block 976 returns a negative result, an error code or other failure indicator is returned to the proxy by the clerk, indicating that the clerk will not decrypt an element for this proxy on behalf of this user. Control then transfers to Block 964, where a suitable text message is placed into the output buffer.

If the test in Block 976 succeeds, the clerk then decrypts (Block 978) the symmetric key from the key object passed to it in Block 974. The clerk maintains a private key for each group on whose behalf it performs a clerk function. Thus, the private key for the group identified in the key object is used for this decryption process. Block 980 checks to see if this decryption was successful. If not, error handling (as described for a "No" result in Block 976) is performed. When the decryption succeeds, the clerk has recovered the symmetric key used to encrypt all document elements referencing this particular key object (i.e. the document elements authorized for this group within this particular key class), and processing continues to Block 982.

In a first aspect of this preferred embodiment (where the element located in Block 944 has not been passed to the clerk in Block 974), after the clerk decrypts the encrypted symmetric key (Block 978, above) using the group's private key, the clerk then re-encrypts the now-plaintext key using the public key of the proxy (which can be obtained from the proxy certificate passed in Block 974). This new version of the symmetric key is then digitally signed by the clerk using the clerk's private key, and returned to the proxy (not shown). Upon receiving this re-encrypted signed key, the proxy verifies the clerk's digital signature, to ensure that the transmission was not sent from an imposter clerk and has not been altered. The proxy then uses its own private key to decrypt this re-encrypted key. At Block 982, this decrypted key is then used by the proxy to decrypt the element located by Block 944, and this element is then appended to the output buffer (Block 966). In this aspect, security of the sensitive information is further protected by having only one process (i.e. the proxy) accessing the encrypted element value on the user's behalf, rather than two (i.e. the proxy and the clerk, as will be described below for an alternative aspect).

Optionally, the clerk may also return the proxy's certificate (or the corresponding key identifier) when the newly-reencrypted key is being returned, so that the proxy can easily locate the corresponding private key on its local key ring or key chain (given that the proxy may have multiple certificates, and multiple private keys).

5           Note that in this first aspect, because the clerk encrypts the sensitive information (the newly-encrypted symmetric key to be used for decrypting the document element) it returns to the proxy, it is not strictly necessary to have a mutually-authenticated secure session between the proxy and clerk. If, on the other hand, a mutually-authenticated secure session does exist between these parties, then the clerk may simply return the key decrypted in Block 978 to the proxy over this secure session, rather than re-encrypting the key and returning this re-encrypted version.

661207-232450  
15           In an alternative aspect of this preferred embodiment, the element to be decrypted has been passed to the clerk during the operation of Block 974. The clerk uses the symmetric key which it decrypted at Block 978 to decrypt this document element at Block 982. The decrypted element may then be returned (not shown) from the clerk to the proxy unencrypted, provided that a mutually-authenticated secure session exists between them. (Otherwise, similar to the technique described above for the first aspect of this embodiment, if a mutually-authenticated secure session is not available, then the clerk must re-encrypt the decrypted document element with the proxy's public key, and sign the result with the clerk's private key, before returning the element to the proxy over the non-secure session. Upon receiving this re-encrypted element, the proxy verifies

20

the clerk's digital signature, to ensure that the transmission was not sent from an imposter clerk and has not been altered, and then uses its own private key to decrypt the re-encrypted element.) The returned element is then appended to the output buffer (Block 966) by the proxy. This type of optimized embodiment might be suitable for an implementation in which both the clerk and proxy functions reside on the same computer.

After Block 966 has appended an element to the output buffer (whether it is a decrypted element, a plaintext version of an element that did not need decrypting, or an error message indicating an element could not be decrypted), Block 968 checks to see if the document being processed contains any more elements. If so, control returns to Block 944 to retrieve the next of these elements. Otherwise, Block 970 passes the now-complete output buffer representing the document contents back to the requesting user on the secure session, for local rendering on the user's device or by the program client, and the processing of Fig. 9B ends. (Alternatively, control may return to Block 940 following completion of Block 970, to await another selection by this user.)

It should be understood that the proxy 655 may also convert the decrypted document into one or more other tagged formats as appropriate for a particular client, such as HTML, Wireless Markup Language ("WML"), Standard Generalized Markup Language ("SGML"), or even the internal file format used by a word processor or printer before returning the document content at Block 970.

### THIRD PREFERRED EMBODIMENT FOR DECRYPTION

In yet another preferred embodiment, the encrypted document is requested and received by a member of a group, where the group may be an authorized member of a community which has access to at least one element of the selectively-encrypted document. The group member then uses a clerk process to decrypt the symmetric key so the group member can decrypt certain fields of the document. The logic with which this preferred embodiment may be implemented is depicted in Figs. 10A through 10C.

The processing of Fig. 10A begins with a group member requesting a selectively-encrypted document from a document server at Block 1000 (for example, by selecting a document identifier from a menu, by issuing a database query which results in selection and retrieval of the document, etc.) Block 1002 indicates that the group member (referred to equivalently as the "user" for the remainder of the description of Figs. 10A - 10C) receives the requested document. The decryption process then begins. (Note that while the processing of document receipt for a group member and for an individual who is not a group member has been shown as separate logic in Figs. 10A - 10C and Figs. 8A and 8B, respectively, it will be obvious to one of skill in the art that the logic for these cases can be combined in a particular implementation. Similarly, the logic for using a client proxy to decrypt a document on behalf of a user, as depicted in Figs. 9A and 9B, may be combined with either or both of these other approaches. Furthermore, the key recovery technique to be described below with reference to Fig. 11 may be combined with any combination of the other functions.)



Block 1004 reads a key class (such as 461, 462 of Fig. 4C) from the root of the DOM representation of the retrieved document. Any DNs in this key class which represent groups are expanded (e.g. by issuing LDAP queries to retrieve the DNs of the group members, or other equivalent technique when a different storage repository is used) at Block 1006. Block 1008 checks to see if this user is a member of any of the expanded groups. (Alternatively, the user may consult locally-stored information to determine if he believes himself to be a member of any of the groups. Such locally-stored information can result from the notification that will be described in reference to Blocks 1240 and 1287.) If so, then the key class object is preferably added to a list of key class objects in Block 1010, where the list of all key classes needing decryption is created for subsequent processing according to the logic of Blocks 1014 through 1022, as will be described. This approach reduces the number of secure session establishments and network roundtrips if a given clerk is responsible for more than one group. Alternatively, the logic of Blocks 1014 through 1022 may be invoked immediately upon encountering a positive result in Block 1008, with the possibility of contacting a particular clerk more than one time. (If a particular user is a member of more than one group for any given key class, an implementation-specific decision may be made as to which group to process, i.e. which clerk to contact, and as to whether a failure to locate the clerk and successfully decrypt the key objects for that selected group should be followed by attempting the process for any subsequent groups or alternate clerks for the same group, if any exist.)

Control reaches Block 1012 when the user is not a member of any expanded groups (a “No” result at Block 1008), and also after the processing of Block 1010. Block 1012 checks to

see if there are any more key classes in the DOM root. If so, control returns to Block 1004 to process the next key class; otherwise, processing continues at Block 1014.

The processing depicted in Blocks 1014 through 1024 is repeated for each different clerk responsible for the key classes accumulated by Block 1010. Block 1014 locates the clerk responsible for a group. A group clerk must be contacted to decrypt the group's encrypted symmetric key (such as key 475 of Fig. 4C), as users who are group members do not have local access to the group's private key; instead, the group clerk maintains this private key. Preferably, the group clerk is located by accessing the information for the group in the LDAP directory (or other repository), where this information includes the identification of the clerk. Block 1016 asks whether the group clerk was found. If not, then the remaining logic of Fig. 10A is bypassed for this group (or groups, if multiple groups use the same clerk), and processing continues at Block 1028 of Fig. 10B. (Any encrypted elements in key classes for which this logic bypassing occurs will not be able to be decrypted, as will be discussed with reference to Fig. 10B.)

After locating a group clerk successfully, Block 1018 preferably establishes an SSL or other mutually-authenticated secure session between the user and the clerk. Preferably, the user then digitally signs each key class object that will be transmitted to the clerk (Block 1020). (As previously described with reference to Block 974 of Fig. 9B, it is not strictly necessary to digitally sign the key class objects if they are to be transmitted on a mutually-authenticated secure session.) The key class objects and the user's corresponding signing certificate (or its corresponding key identifier) are then passed to the clerk (Block 1022). (Note that if a mutually-authenticated

secure session was not established, then the certificate of the user must be passed to the clerk; otherwise, the key identifier can be passed instead.) The processing which occurs at the group clerk in response to receiving this information is shown in Fig. 10C, and will now be discussed.

At Block 1060 of Fig. 10C, the clerk process has received one or more key class objects which need to be decrypted for the user, along with the user's certificate (or equivalently, the user's DN and key identifier). Each key class object is processed according to the logic of Blocks 1060 through 1070, after which the clerk is finished and awaits another such request. Block 1060 gets a key class object from the passed information. If the objects have been digitally signed, the clerk preferably verifies this digital signature. (As previously described with reference to Block 976 of Fig. 9B, the creation of digital signatures and verification thereof may be omitted if information is being transmitted on a mutually-authenticated secure session.) At Block 1062, the clerk checks to make sure that the requester is an authorized member of the group whose DN appears in the key class object, by querying the directory or other repository to determine the group members. If the requester is not an authorized group member, control transfers to Block 1068 without further processing of this key class object. Otherwise, when Block 1062 has a positive result, the clerk decrypts the group's encrypted symmetric key from the key class object using the clerk's local copy of the group's private key. (Recall that the group's public key was used to encrypt this field, according to Block 780 of Fig. 7C.) The clerk then re-encrypts the result (Block 1066), using the public key of the requester as determined from the certificate which has been passed with the decryption request. (Alternatively, if a DN and key identifier were passed with the decryption request instead of a certificate, the clerk will use the DN to obtain a

list of certificates corresponding to this DN from an LDAP directory or other repository. The clerk will then select a particular certificate from the returned certificates using the passed key identifier, and the public key from this particular certificate will be used in Block 1066.) The clerk may alternatively omit the re-encryption of the result in Block 1066, provided that a mutually-authenticated secure session was established during Block 1018.

If there are more key class objects in this request (Block 1068), the next key class is processed by returning control to Block 1060; otherwise, the key class object(s) and re-encrypted symmetric key(s) (or, depending on the alternative processing just described, one or more plaintext keys and/or plaintext document elements, or re-encrypted document elements) are digitally signed by the clerk (if the session between the requester and clerk is not a mutually-authenticated secure session), and returned to the requester (Block 1070), after which the processing of Fig. 10C ends.

Returning now to Fig. 10A, Block 1024 resumes the user's processing, after the clerk processing of Fig. 10C has completed, by receiving the key objects which were passed.

Optionally, the certificate which was passed (or its key identifier) may also be returned so that the requester can easily locate the corresponding private key on its local key ring or chain (given that a requester may have more than one certificate and private key). If the returned information was digitally signed by the clerk, the user first verifies the digital signature to ensure that the information was not created by an impostor and has not been altered. (If the session between the user and clerk is a mutually-authenticated secure session, then the signing by the clerk, and

verification by the user, is not required.) The user then decrypts the symmetric key from each key class object returned from a group clerk (Block 1026) using the user's private key. (Or, if the keys are returned unencrypted on a mutually-authenticated secure session, this decryption in Block 1026 is not required: these unencrypted keys will be used directly for decrypting elements of the associated key classes.) The user will now be able to decrypt the elements for that key class, as will be described with reference to Fig. 10B.

The elements of the DOM are read in stream order (Block 1028), to match the order in which they were read and processed during encryption. Block 1030 asks if the element just located is encrypted. If not, control transfers to Block 1038 where the unencrypted element is appended to an output buffer being created. Otherwise, when the element is encrypted, Block 1032 checks to see if a decrypted symmetric key exists for the key class associated with this element. If there is no such decrypted symmetric key (e.g. the user was not a member of any authorized groups for this element, or the group clerk could not be located, etc.), then this user is not authorized to view the encrypted element, and a suitable message is substituted for the encrypted element at Block 1034. When the symmetric key for this key class was successfully decrypted, Block 1032 has a positive result and Block 1036 uses that decrypted key to decrypt the element. Block 1038 then appends the result to the output buffer. If there are still more elements to be processed (a "Yes" result at Block 1040), processing returns to Block 1028; otherwise, the output buffer is complete and its contents are rendered for the user at Block 1042.

The processing of the encrypted document is now finished, and Fig. 10B ends.

#### FOURTH PREFERRED EMBODIMENT FOR DECRYPTION

It may become necessary to recover the entire contents of a document (for example, when an encrypted document stored in a company repository becomes the subject of litigation) without regard to how the document was broken down into different key classes during the encryption process. Another preferred embodiment of the present invention defines a technique whereby an authorized user (such as a systems administrator, escrow agent, etc.) may recover all the keys which were used to encrypt such a document. The logic with which this key recovery technique may be performed is shown in Figs. 11A and 11B.

According to this preferred embodiment, the party which is to have authority for recovering all keys (hereinafter referred to as the "key recovery agent") is defined as an authorized community member for each key class of each document. This will cause a key object for the key recovery agent to be included in the document for each key class, where the key object includes a symmetric key which has been encrypted with the key recovery agent's public key. Thus, the key recovery agent's private key can be used to decrypt the symmetric key if that becomes necessary, providing access to the encrypted elements of the key class.

Note that this key recovery technique is also beneficial for other situations, for example: the private key that would otherwise be used to decrypt a document element becomes lost; a user holding a private key leaves the company without providing the private key value; a user holding a private key as a group member is reassigned, and is no longer a group member; etc.

Fig. 11A depicts additional logic that may be inserted into the logic flow of Fig. 7A, above, for the encryption process. (Note that this additional logic is not strictly required if it can be determined conclusively that the key recovery agent was included in the community for each stored policy object. Use of this additional logic, however, provides a technique to ensure that the key recovery agent will have access to the elements in every key class.)

The logic of Fig. 11A modifies the flow of control from Block 725 of Fig. 7A to Block 730 of Fig. 7A, and thus these substitute blocks are represented in Fig. 11A as Blocks 725' through 730', respectively. Following operation of Block 725', Block 726 asks whether the key recovery agent is a member of the retrieved community. If not, then Block 727 adds the DN (or other similar identifier, when using a storage repository other than an LDAP directory) for the key recovery agent. Thus, when the encrypted symmetric keys are later created (see Block 780 of Fig. 7C), the key recovery agent's public key will be used in a key object having the agent's DN, and the agent will subsequently be able to decrypt this symmetric key (and its associated elements) using its private key.

Fig. 11B shows how the logic flow of Fig. 8B may optionally be modified to account for the key recovery agent. Blocks 855', 865', 870', and 875' of Fig. 11B represent the same functionality as Blocks 855, 865, 870, and 875 of Fig. 8B. (Refer to the discussion of Fig. 8B, above, for a detailed description of this processing.) However, because the key recovery agent will always be an authorized community member, the existing test at Block 860 of Fig. 8B will always have a positive result, and thus this test and Block 880 (which handles the negative result)

may be omitted. As will be obvious, the modification shown in Fig. 11B should only be made if the implementation is tailored specifically to the key recovery agent.

## ADMINISTRATION

Fig. 12 depicts the preferred embodiment of the logic with which an administrator or administration process sets up and administers the secure document system of the present invention. This logic begins at work request queue 1200 where one of processes 1210, 1220, 1250, 1270, or 1290 is dispatched according to the type of work request.

In Block 1210 the administrator 630 creates a new group by 1215 putting an entry for the group into the LDAP directory 640. Block 1219 indicates that no further processing is required for this type of work request. Note that after a group has been created, it is non-functional until at least one clerk entity and at least one member entity are associated with the group. A group can have more than one clerk. It can have zero or more authorized agents (proxies).

In Block 1220 the administrator 630 adds an entity to a group. In Block 1225 a test is made to see if the group already exists in the LDAP directory 640 as a result of prior group creation 1210. If not, this is an error (Block 1245). In Block 1230 a test is made to see if the entity to be added already exists in the LDAP directory 640 (as a result of prior entity creation 1290). If not, this is also an error (Block 1245). Passing both tests 1225 and 1230, the entity is added to the group in Block 1235. Then optionally the entity is notified (Block 1240). For example, this might be an e-mail notice telling the user 675 to logon to the secure document



system because secure documents may now be accessed. Block 1249 indicates that no further processing is required for this type of work request. Such notification may also enable an optimized implementation in which a group member decides locally that it should attempt to contact a clerk, without first retrieving a possibly-very-long list of all group members from an LDAP directory to determine its own group membership.

In Block 1250 the administrator 630 removes an entity from a group. In Block 1255 a test is made to see if the group already exists in the LDAP directory 640. If not, this is an error (Block 1245). In Block 1260 a test is made to see if the entity to be removed already exists in the LDAP directory 640. If not, this is also an error (Block 1245). Passing both tests 1255 and 1260, the entity is removed from the group (Block 1265). If the entity is a member of more than one group and the entity is to be completely removed from all such groups, then Block 1265 is repeated for each such group. If the entity's certificate was not one created according to Block 1280, then the certificate revocation list (Block 1267) is updated, for example by making an entry in the LDAP directory and/or contacting the certificate authority 635. Block 1269 indicates that no further processing is required for this type of work request.

In Block 1270 the administrator 630 reauthorizes an entity that is currently a member of a group, such as after receiving a reauthorization request (see Block 914 of Fig. 9A). In Block 1275 a test is made to see if the entity's access privileges or certificate have been revoked. If so, the process proceeds to Block 1278 whereupon a revoke entity work request (Block 1250) is processed via entry point 1205. If not, in Block 1277 the administrator 630 examines the

5 registration data provided by the user 675 (in Block 924 of Fig. 9A). If the data is satisfactory, the administrator 630 issues an updated certificate with a new expiration date (Block 1280), updates the directory (Block 1285), and optionally notifies the entity (Block 1287). Block 1289 indicates that no further processing is required for this type of work request. If the registration data (a "No" result in Block 1277) is not OK, the process proceeds to Block 1278 whereupon a revoke entity work request (Block 1250) is processed.

10 In Block 1290 the administrator 630 processes a request to create a new entity 655, 670, 675, or 680. First the administrator 630 examines the registration data (from Block 924 of Fig. 9A) at Block 1292. At Block 1294 if the data is satisfactory, the administrator 630 issues a new certificate, if needed, in a manner similar to Blocks 1280 - 1287, otherwise uses the entity's existing certificate, determines (Block 1298) what group(s) the entity should be added to, processes these group additions such as by creating multiple work requests (Block 1300) and queuing these as input to Block 1200, and then branching to Block 1202 multiple times to process these queued requests. Block 1309 indicates that no further processing is required for this type of work request.

20 Thus, at the conclusion of the administration processing in Block 1220 - 1249 and their necessary antecedents, a client 675 is able to perform the logic of Blocks 902 - 918 of Fig. 9A (establishing an SSL session to the secure document server 655), and perform the logic of Fig. 9B to select an encrypted document, get it decrypted, and securely view the elements of the document for which the user 675 is authorized.

As has been demonstrated, the preferred embodiment of the present invention provides an easy-to-use, flexible approach for enforcing security policy. The security policy information may be different from one data element to another, and is specified by binding the data policy identifier (i.e. the URI where the policy is stored) to the data element in the document DTD. The present invention is backward compatible, permitting XML documents to be used by both XSL processors which have been modified to utilize policy instrumentation according to the present invention, as well as by XSL processors which have not been so modified. (Such unmodified XSL processors simply perform the entity substitution of the data policy URIs within the DTD, but do not retrieve nor process the policy objects referred to by those URIs.)

A further advantage of the present invention is that no change is required in the style sheet that controls the transformation. The style sheet references to the value-of method remain unchanged. The present invention enforces security policy by overriding the code that is invoked upon encountering a value-of method invocation from the (unmodified) style sheet. (It would be possible, of course, to modify a style sheet to take advantage of the policy mark-up of the XML document if desired.)

The present invention is neutral to the format of the security policy itself. What is required for enforcing a security policy is only that the policy can be accessed by a URI (such as the references to policy objects in an LDAP directory, as shown in Fig. 3) and, of course, that the policy is understood by the instrumentation enforcing that policy in the XSL processor. This has the additional benefit of longevity in solution implementation, since the implementation of the

preferred embodiment will not need to be adjusted as new enterprise security policy requirements force a change in the policy encoding and instrumentation: the stored policies will then simply be updated to enforce the new policy requirements, and the references to the stored policy may be updated as necessary (e.g. if the updated policy is stored in a different location).

5           Although the preferred embodiment has been described as using XSL style sheets, style sheets in other notations may be used instead of XSL (e.g. Document Style Semantics and Specification Language, or DSSSL, which is an International Standard ISO/IEC 10179: 1996) without deviating from the inventive concepts of the present invention. In addition, the policy-driven XSL processor described can also be used to generate encrypted documents in non-XML formats that use SGML-derived tagging, such as HTML; however, a decoder for such a format would need to be modified using the logic defined herein for the augmented XML processor so that the document could be decrypted. This process, however, may not yield a usable document if the viewer is not allowed to see all the document data, due to assumed relationship rules in the non-XML language tags.

15           While the preferred embodiment of the present invention has been described, additional variations and modifications in that embodiment may occur to those skilled in the art once they learn of the basic inventive concepts. Therefore, it is intended that the appended claims shall be construed to include both the preferred embodiment and all such variations and modifications as fall within the spirit and scope of the invention.

We claim:

1. A computer program product embodied on computer readable media readable by a computing system in a computing environment, for enforcing security policy using style sheet processing, comprising:

- an input document;
- one or more stored policy enforcement objects, wherein each of said stored policy enforcement objects specifies a security policy to be associated with zero or more elements of said input document;
- a Document Type Definition (DTD) corresponding to said input document, wherein said DTD has been augmented with one or more references to selected ones of said stored policy enforcement objects;
- an augmented style sheet processor, wherein said augmented processor further comprises:
  - computer-readable program code means for loading said DTD;
  - computer-readable program code means for resolving each of said one or more references in said loaded DTD;
  - computer-readable program code means for instantiating said policy enforcement objects associated with said resolved references;
  - computer-readable program code means for executing selected ones of said instantiated policy enforcement objects during application of one or more style sheets to said input document, wherein a result of said computer-readable program code means for executing is an interim transient document reflecting said execution;

21 computer-readable program code means for generating one or more random  
22 encryption keys;

23 computer-readable program code means for encrypting selected elements of said  
24 interim transient document, wherein a particular one of said generated random encryption keys  
25 may be used to encrypt one or more of said selected elements, while leaving zero or more other  
26 elements of said interim transient document unencrypted;

27 computer-readable program code means for encrypting each of said one or more  
28 random encryption keys; and

29 computer-readable program code means for creating an encrypted output  
30 document comprising said zero or more other unencrypted elements, said selected encrypted  
31 elements, and said encrypted encryption keys;

32 computer-readable program code means for requesting, from a user or process on a client  
33 device, said encrypted output document, wherein said user or process is a member of a particular  
34 group authorized to view at least one of said selected encrypted elements;

35 computer-readable program code means for receiving said requested output document at  
36 said client device; and

37 an augmented document processor executed on said client device, comprising:

38 computer-readable program code means for contacting a clerk of said particular  
39 group for decryption of selected ones of said encrypted encryption keys; and

40 computer-readable program code means for decrypting said requested output  
41 document using said decrypted selected ones of said encrypted encryption keys, thereby creating a  
42 result document.

1 2. The computer program product according to Claim 1, further comprising computer-  
2 readable program code means for rendering said result document on said client device.

1 3. The computer program product according to Claim 1, wherein said interim transient  
2 document comprises one or more encryption tags identifying elements needing encryption.

1 4. The computer program product according to Claim 1, wherein said input document is  
2 specified in an Extensible Markup Language (XML) notation.

1 5. The computer program product according to Claim 4, wherein said result document is  
2 specified in said XML notation.

1 6. The computer program product according to Claim 1, wherein said stored policy  
2 enforcement objects further comprise computer-readable program code means for overriding a  
3 method for evaluating said elements of said input document, and wherein said computer-readable  
4 program code means for executing further comprises computer-readable program code means for  
5 executing said computer-readable program code means for overriding.

1 7. The computer program product according to Claim 6, wherein said style sheets are  
2 specified in an Extensible Stylesheet Language (XSL) notation.

1 8. The computer program product according to Claim 7, wherein said method is a value-of  
2 method of said XSL notation, and wherein said computer-readable program code means for  
3 overriding said value-of method is by subclassing said value-of method.

1 9. The computer program product according to Claim 6 or Claim 8, wherein:

2 said overridden method comprises:

3 computer-readable program code means for generating encryption tags; and

4 computer-readable program code means for inserting said generated encryption  
5 tags into said interim transient document to surround elements of said interim transient document  
6 which are determined to require encryption; and

7 said computer-readable program code means for encrypting selected elements encrypts  
8 those elements surrounded by said inserted encryption tags.

10. The computer program product according to Claim 2, wherein:

each of said instantiated policy enforcement objects further comprises:

3 a specification of a community that is authorized to view said elements associated  
4 with said security policy, said specification of said communities further comprising specification of  
5 at least one of: (1) one or more individual users or processes which are community members, and  
6 (2) one or more groups which are community members, wherein each of said groups comprises  
7 one or more individual users or processes; and

8 an encryption requirement for said elements associated with said security policy;  
9 and



10

wherein said particular group is specified as one of said community members.

1

11. The computer program product according to Claim 10, wherein said encryption

2

requirement further comprises specification of an encryption algorithm.

1

12. The computer program product according to Claim 10, wherein said encryption

2

requirement further comprises specification of an encryption algorithm strength value.

1

13. The computer program product according to Claim 10, wherein:

2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2

1 15. The computer program product according to Claim 1, wherein said computer-readable  
2 program code means for encrypting selected elements uses a cipher block chaining mode  
3 encryption process.

1 16. The computer program product according to Claim 13, further comprising:  
2 computer-readable program code means for creating a key class for each unique  
3 community, wherein said key class is associated with each of said encrypted elements for which  
4 this unique community is an authorized viewer, and wherein said key class comprises: (1) a  
5 strongest encryption requirement of said associated encrypted elements; (2) an identifier of each  
6 of said members of said unique community; and (3) one of said different versions of said  
7 encrypted encryption key for each of said identified community members; and

8 wherein:

9 said computer-readable program code means for generating said one or more  
10 random encryption keys generates a particular one of said random encryption keys for each of  
11 said key classes, and wherein each of said different versions in a particular key class is encrypted  
12 from said generated encryption key generated for said key class; and

13 said computer-readable program code means for encrypting selected elements uses  
14 that one of said particular random encryption keys which was generated for said key class with  
15 which said selected element is associated.

1 17. The computer program product according to Claim 13, wherein:

2           said computer-readable program code means for decrypting said requested output  
3 document further comprises:

4           computer-readable program code means for expanding said one or more groups of  
5 said communities to determine said individual users or processes in each of said expanded groups;

6           computer-readable program code means for determining one or more of said  
7 expanded communities of which said requesting user or process is one of said expanded group  
8 members;

9           computer-readable program code means for decrypting, for each of said  
10 determined communities, said different version of said random encryption key which was  
11 encrypted using said public key of said one member, wherein said one member is said expanded  
12 group of which said requesting user or process is one of said expanded group members, thereby  
13 creating a decrypted key for each of said determined communities; and

14           computer-readable program code means for decrypting selected ones of said  
15 encrypted elements in said requested output document using said decrypted keys, wherein said  
16 selected ones of said encrypted elements are those which were encrypted for one of said  
17 determined communities; and

18           said computer-readable program code means for rendering further comprises:

19           computer-readable program code means for rendering said decrypted selected ones  
20 and said other unencrypted elements.

1       18.    The computer program product according to Claim 17, wherein:

2           said computer-readable program code means for contacting said group clerk further  
3 comprises:

4           computer-readable program code means for locating said group clerk; and

5           computer-readable program code means for establishing a session between said  
6 client device and said group clerk;

7           said computer-readable program code means for decrypting said different version for each  
8 of said determined communities further comprises:

9           computer-readable program code means for digitally signing said different version  
10 by said requesting user or process, thereby creating a first digital signature;

11           computer-readable program code means for sending said first digital signature and  
12 said different version to said group clerk on said session;

13           computer-readable program code means for receiving said sent first digital  
14 signature and said different version by said group clerk;

15           computer-readable program code means for verifying said first digital signature by  
16 said group clerk;

17           computer-readable program code means for verifying, by said group clerk, that  
18 said requesting user or process is one of said authorized members of said determined community  
19 associated with said different version;

20           computer-readable program code means for decrypting said different version using  
21 a private key of said one member which is associated with said public key which was used for  
22 encryption;

23 computer-readable program code means for re-encrypting said decrypted different  
24 version using a public key of said requesting user or process, thereby creating a re-encrypted key;

25 computer-readable program code means for digitally signing said re-encrypted key  
26 by said group clerk, thereby creating a second digital signature;

27 computer-readable program code means for returning said second digital signature  
28 and said re-encrypted key from said group clerk to said client device on said session;

29 computer-readable program code means for receiving said second digital signature  
30 and said re-encrypted key at said client device;

31 computer-readable program code means for verifying said second digital signature  
32 at said client device; and

33 computer-readable program code means, operable on said client device, for  
34 decrypting said received re-encrypted key using a private key of said requesting user or process,  
35 creating said decrypted key; and

36 said computer-readable program code means for decrypting selected ones of said  
37 encrypted elements in said requested output document is executed at said client device using said  
38 decrypted key.

1 19. The computer program product according to Claim 13, wherein:

2 said computer-readable program code means for decrypting said requested output  
3 document further comprises:

4 computer-readable program code means for expanding said one or more groups of  
5 said communities to determine said individual users or processes in each of said expanded groups;

6 computer-readable program code means for determining one or more of said  
7 expanded communities of which said requesting user or process is one of said expanded group  
8 members; and

9 computer-readable program code means for decrypting selected ones of said  
10 encrypted elements in said requested output document, wherein said selected ones of said  
11 encrypted elements are those which were encrypted for one of said determined communities; and

12 said computer-readable program code means for rendering further comprises:

13 computer-readable program code means for rendering said returned decrypted  
14 elements and said other unencrypted elements.

20. The computer program product according to Claim 19, wherein:

said computer-readable program code means for contacting said group clerk further  
comprises:

computer-readable program code means for locating said group clerk; and

computer-readable program code means for establishing a mutually-authenticated  
secure session between said client device and said group clerk; and

said computer-readable program code means for decrypting selected ones of said  
encrypted elements in said requested output document further comprises:

computer-readable program code means for locating said different version of said  
random encryption key which was encrypted using said public key of said one member, wherein  
said one member is said expanded group of which said requesting user or process is one of said  
expanded group members;

13 computer-readable program code means for sending said located different version  
14 to said group clerk, along with an element encrypted with said different version, on said secure  
15 session;

16 computer-readable program code means for receiving said sent different version  
17 and said element by said group clerk;

18 computer-readable program code means for verifying, by said group clerk, that  
19 said requesting user or process is one of said authorized members of said determined community  
20 associated with said different version;

21 computer-readable program code means for decrypting said different version using  
22 a private key of said one member which is associated with said public key which was used for  
23 encryption;

24 computer-readable program code means for decrypting said element using said  
25 decrypted different version; and

26 computer-readable program code means for returning said decrypted element from  
27 said group clerk to said client device on said secure session.

1 21. The computer program product according to Claim 16, wherein:

2 said computer-readable program code means for contacting said group clerk further  
3 comprises:

4 computer-readable program code means for locating said group clerk; and

5 computer-readable program code means for establishing a mutually-authenticated  
6 secure session between said client device and said group clerk;

7           said computer-readable program code means for decrypting said requested output  
8 document further comprises:

9           computer-readable program code means for expanding said one or more groups of  
10 said communities to determine said individual users or processes in each of said expanded groups;

11           computer-readable program code means for determining one or more of said key  
12 classes which identify said requesting user or process as one of said expanded group members;

13           computer-readable program code means for decrypting, for each of said  
14 determined key classes, said different version of said random encryption key in said key class  
15 which was encrypted using said public key of said one member, wherein said computer-readable  
16 program code means for decrypting uses a private key of said one member which is associated  
17 with said public key which was used for encryption, thereby creating a decrypted key; and

18           computer-readable program code means for decrypting selected ones of said  
19 encrypted elements in said requested output document using said decrypted keys, wherein said  
20 selected ones of said encrypted elements are those which were encrypted for said key class; and

21           said computer-readable program code means for rendering further comprises:

22           computer-readable program code means for rendering said decrypted selected ones  
23 and said other unencrypted elements.

1       22.    The computer program product according to Claim 17, wherein:

2           said computer-readable program code means for contacting said group clerk further  
3 comprises:

4           computer-readable program code means for locating said group clerk; and



5 computer-readable program code means for establishing a mutually-authenticated  
6 secure session between said client device and said group clerk;

7 said computer-readable program code means for decrypting said different version for each  
8 of said determined communities further comprises:

9 computer-readable program code means for sending said different version to said  
10 group clerk on said secure session;

11 computer-readable program code means for receiving said sent different version by  
12 said group clerk;

13 computer-readable program code means for verifying, by said group clerk, that  
14 said requesting user or process is one of said authorized members of said determined community  
15 associated with said different version;

16 computer-readable program code means for decrypting said different version using  
17 a private key of said one member which is associated with said public key which was used for  
18 encryption;

19 computer-readable program code means for returning said decrypted different  
20 version from said group clerk to said client device on said secure session; and

21 computer-readable program code means for receiving said decrypted different  
22 version at said client device; and

23 said computer-readable program code means for decrypting selected ones of said  
24 encrypted elements in said requested output document is executed at said client device using said  
25 received decrypted different version.

1 23. The computer program product according to Claim 17, Claim 21, or Claim 22, wherein  
2 said computer-readable program code means for rendering further comprises computer-readable  
3 program code means for rendering a substitute text message for any of said selected encrypted  
4 elements in said requested output document which cannot be decrypted by said computer-  
5 readable program code means for decrypting said requested output document.

1 24. The computer program product according to Claim 19, wherein:

2 said computer-readable program code means for contacting said group clerk further  
3 comprises:

4 computer-readable program code means for locating said group clerk; and

5 computer-readable program code means for establishing a session between said  
6 client device and said group clerk; and

7 said computer-readable program code means for decrypting selected ones of said  
8 encrypted elements in said requested output document further comprises:

9 computer-readable program code means for locating said different version of said  
10 random encryption key which was encrypted using said public key of said one member, wherein

11 said one member is said expanded group of which said requesting user or process is one of said  
12 expanded group members;

13 computer-readable program code means for digitally signing, by said requesting  
14 user or process, said located version and an element encrypted with said different version, thereby  
15 creating a first digital signature;

16 computer-readable program code means for sending said first digital signature, said  
17 located different version, and said element to said group clerk on said session;

18 computer-readable program code means for receiving said sent first digital  
19 signature, said different version, and said element by said group clerk;

20 computer-readable program code means for verifying said first digital signature by  
21 said group clerk;

22 computer-readable program code means for verifying, by said group clerk, that  
23 said requesting user or process is one of said authorized members of said determined community  
24 associated with said different version;

25 computer-readable program code means for decrypting said different version using  
26 a private key of said one member which is associated with said public key which was used for  
27 encryption;

28 computer-readable program code means for decrypting said element using said  
29 decrypted different version;

30 computer-readable program code means for re-encrypting said decrypted element  
31 using a public key of said requesting user or process, thereby creating a re-encrypted element;

32 computer-readable program code means for digitally signing said re-encrypted  
33 element by said group clerk, thereby creating a second digital signature;

34 computer-readable program code means for returning said second digital signature  
35 and said re-encrypted element from said group clerk to said client device on said session;

36 computer-readable program code means for receiving said second digital signature  
37 and said re-encrypted element at said client device; and

38 computer-readable program code means for verifying said second digital signature  
39 by said requesting user or process.

1 25. The computer program product according to Claim 1, wherein said DTD is replaced by a  
2 schema.

1 26. The computer program product according to Claim 10, wherein said encryption  
2 requirement further comprises specification of an encryption key length.

1 27. The computer program product according to Claim 9, wherein said inserted encryption  
2 tags may surround either values of said elements or values and tags of said elements.

1 28. A system for enforcing security policy using style sheet processing in a computing  
2 environment, comprising:

3 an input document;

4 one or more stored policy enforcement objects, wherein each of said stored policy  
5 enforcement objects specifies a security policy to be associated with zero or more elements of said  
6 input document;

7 a Document Type Definition (DTD) corresponding to said input document, wherein said  
8 DTD has been augmented with one or more references to selected ones of said stored policy  
9 enforcement objects;

10 an augmented style sheet processor, wherein said augmented processor further comprises:

11 means for loading said DTD;

12 means for resolving each of said one or more references in said loaded DTD;

13 means for instantiating said policy enforcement objects associated with said

14 resolved references;

15 means for executing selected ones of said instantiated policy enforcement objects

16 during application of one or more style sheets to said input document, wherein a result of said

17 means for executing is an interim transient document reflecting said execution;

18 means for generating one or more random encryption keys;

19 means for encrypting selected elements of said interim transient document, wherein

20 a particular one of said generated random encryption keys may be used to encrypt one or more of

21 said selected elements, while leaving zero or more other elements of said interim transient

22 document unencrypted;

23 means for encrypting each of said one or more random encryption keys; and

24 means for creating an encrypted output document comprising said zero or more

25 other unencrypted elements, said selected encrypted elements, and said encrypted encryption

26 keys;

27 means for requesting, from a user or process on a client device, said encrypted output

28 document, wherein said user or process is a member of a particular group authorized to view at

29 least one of said selected encrypted elements;

30 means for receiving said requested output document at said client device; and

31 an augmented document processor executed on said client device, comprising:

32 means for contacting a clerk of said particular group for decryption of selected  
33 ones of said encrypted encryption keys; and  
34 means for decrypting said requested output document using said decrypted  
35 selected ones of said encrypted encryption keys, thereby creating a result document.

1 29. The system according to Claim 28, further comprising means for rendering said result  
2 document on said client device.

1 30. The system according to Claim 28, wherein said interim transient document comprises one  
2 or more encryption tags identifying elements needing encryption.

1 31. The system according to Claim 28, wherein said input document is specified in an  
2 Extensible Markup Language (XML) notation.

1 32. The system according to Claim 31, wherein said result document is specified in said XML  
2 notation.

1 33. The system according to Claim 28, wherein said stored policy enforcement objects further  
2 comprise means for overriding a method for evaluating said elements of said input document, and  
3 wherein said means for executing further comprises means for executing said means for  
4 overriding.

1 34. The system according to Claim 33, wherein said style sheets are specified in an Extensible  
2 Stylesheet Language (XSL) notation.

1 35. The system according to Claim 34, wherein said method is a value-of method of said XSL  
2 notation, and wherein said means for overriding said value-of method is by subclassing said  
3 value-of method.

1 36. The system according to Claim 33 or Claim 35, wherein:

2 said overridden method comprises:

3 means for generating encryption tags; and

4 means for inserting said generated encryption tags into said interim transient  
5 document to surround elements of said interim transient document which are determined to  
6 require encryption; and

7 said means for encrypting selected elements encrypts those elements surrounded by said  
8 inserted encryption tags.

1 37. The system according to Claim 29, wherein:

2 each of said instantiated policy enforcement objects further comprises:

3 a specification of a community that is authorized to view said elements associated  
4 with said security policy, said specification of said communities further comprising specification of  
5 at least one of: (1) one or more individual users or processes which are community members, and

6 (2) one or more groups which are community members, wherein each of said groups comprises  
7 one or more individual users or processes; and  
8 an encryption requirement for said elements associated with said security policy;  
9 and  
10 wherein said particular group is specified as one of said community members.

1 38. The system according to Claim 37, wherein said encryption requirement further comprises  
2 specification of an encryption algorithm.

1 39. The system according to Claim 37, wherein said encryption requirement further comprises  
2 specification of an encryption algorithm strength value.

1 40. The system according to Claim 37, wherein:

2 said means for encrypting said encryption keys further comprises means for encrypting a  
3 different version of each of said random encryption keys for each of said one or more members of  
4 each of zero or more of said communities which uses said encryption key, and wherein each of  
5 said different versions is encrypted using a public key of said community member for which said  
6 different version was encrypted.

1 41. The system according to Claim 37, wherein said encryption requirement may have a null  
2 value to indicate that said specified security policy does not require encryption.



1 42. The system according to Claim 28, wherein said means for encrypting selected elements  
2 uses a cipher block chaining mode encryption process.

1 43. The system according to Claim 40, further comprising:  
2 means for creating a key class for each unique community, wherein said key class is  
3 associated with each of said encrypted elements for which this unique community is an authorized  
4 viewer, and wherein said key class comprises: (1) a strongest encryption requirement of said  
5 associated encrypted elements; (2) an identifier of each of said members of said unique  
6 community; and (3) one of said different versions of said encrypted encryption key for each of  
7 said identified community members; and

8 wherein:

9 said means for generating said one or more random encryption keys generates a  
10 particular one of said random encryption keys for each of said key classes, and wherein each of  
11 said different versions in a particular key class is encrypted from said generated encryption key  
12 generated for said key class; and

13 said means for encrypting selected elements uses that one of said particular random  
14 encryption keys which was generated for said key class with which said selected element is  
15 associated.

1 44. The system according to Claim 40, wherein:

2 said means for decrypting said requested output document further comprises:

3 means for expanding said one or more groups of said communities to determine  
4 said individual users or processes in each of said expanded groups;

5 means for determining one or more of said expanded communities of which said  
6 requesting user or process is one of said expanded group members;

7 means for decrypting, for each of said determined communities, said different  
8 version of said random encryption key which was encrypted using said public key of said one  
9 member, wherein said one member is said expanded group of which said requesting user or  
10 process is one of said expanded group members, thereby creating a decrypted key for each of said  
11 determined communities; and

12 means for decrypting selected ones of said encrypted elements in said requested  
13 output document using said decrypted keys, wherein said selected ones of said encrypted elements  
14 are those which were encrypted for one of said determined communities; and

15 said means for rendering further comprises:

16 means for rendering said decrypted selected ones and said other unencrypted  
17 elements.

1 45. The system according to Claim 44, wherein:

2 said means for contacting said group clerk further comprises:

3 means for locating said group clerk; and

4 means for establishing a session between said client device and said group clerk;

5 said means for decrypting said different version for each of said determined communities  
6 further comprises:

7 means for digitally signing said different version by said requesting user or process,  
8 thereby creating a first digital signature;

9 means for sending said first digital signature and said different version to said  
10 group clerk on said session;

11 means for receiving said sent first digital signature and said different version by  
12 said group clerk;

13 means for verifying said first digital signature by said group clerk;

14 means for verifying, by said group clerk, that said requesting user or process is one  
15 of said authorized members of said determined community associated with said different version;

16 means for decrypting said different version using a private key of said one member  
17 which is associated with said public key which was used for encryption;

18 means for re-encrypting said decrypted different version using a public key of said  
19 requesting user or process, thereby creating a re-encrypted key;

20 means for digitally signing said re-encrypted key by said group clerk, thereby  
21 creating a second digital signature;

22 means for returning said second digital signature and said re-encrypted key from  
23 said group clerk to said client device on said session;

24 means for receiving said second digital signature and said re-encrypted key at said  
25 client device;

26 means for verifying said second digital signature at said client device; and

27 means, operable on said client device, for decrypting said received re-encrypted  
28 key using a private key of said requesting user or process, creating said decrypted key; and

29           said means for decrypting selected ones of said encrypted elements in said requested  
30           output document is executed at said client device using said decrypted key.

1           46.    The system according to Claim 40, wherein:

2                   said means for decrypting said requested output document further comprises:

3                           means for expanding said one or more groups of said communities to determine  
4           said individual users or processes in each of said expanded groups;

5                           means for determining one or more of said expanded communities of which said  
6           requesting user or process is one of said expanded group members; and

7                           means for decrypting selected ones of said encrypted elements in said requested  
8           output document, wherein said selected ones of said encrypted elements are those which were  
9           encrypted for one of said determined communities; and

10                   said means for rendering further comprises:

11                           means for rendering said returned decrypted elements and said other unencrypted  
12           elements.

1           47.    The system according to Claim 46, wherein:

2                   said means for contacting said group clerk further comprises:

3                           means for locating said group clerk; and

4                           means for establishing a mutually-authenticated secure session between said client  
5           device and said group clerk; and

6           said means for decrypting selected ones of said encrypted elements in said requested  
7           output document further comprises:

8                       means for locating said different version of said random encryption key which was  
9           encrypted using said public key of said one member, wherein said one member is said expanded  
10          group of which said requesting user or process is one of said expanded group members;

11                     means for sending said located different version to said group clerk, along with an  
12          element encrypted with said different version, on said secure session;

13                     means for receiving said sent different version and said element by said group  
14          clerk;

15                     means for verifying, by said group clerk, that said requesting user or process is one  
16          of said authorized members of said determined community associated with said different version;

17                     means for decrypting said different version using a private key of said one member  
18          which is associated with said public key which was used for encryption;

19                     means for decrypting said element using said decrypted different version; and

20                     means for returning said decrypted element from said group clerk to said client  
21          device on said secure session.

1          48.     The system according to Claim 43, wherein:

2                     said means for contacting said group clerk further comprises:

3                               means for locating said group clerk; and

4                               means for establishing a mutually-authenticated secure session between said client  
5          device and said group clerk;

6           said means for decrypting said requested output document further comprises:  
7                       means for expanding said one or more groups of said communities to determine  
8   said individual users or processes in each of said expanded groups;  
9                       means for determining one or more of said key classes which identify said  
10   requesting user or process as one of said expanded group members;  
11                      means for decrypting, for each of said determined key classes, said different  
12   version of said random encryption key in said key class which was encrypted using said public key  
13   of said one member, wherein said means for decrypting uses a private key of said one member  
14   which is associated with said public key which was used for encryption, thereby creating a  
15   decrypted key; and  
16                      means for decrypting selected ones of said encrypted elements in said requested  
17   output document using said decrypted keys, wherein said selected ones of said encrypted elements  
18   are those which were encrypted for said key class; and  
19           said means for rendering further comprises:  
20                      means for rendering said decrypted selected ones and said other unencrypted  
21   elements.

1   49.    The system according to Claim 44, wherein:

2           said means for contacting said group clerk further comprises:  
3                      means for locating said group clerk; and  
4                      means for establishing a mutually-authenticated secure session between said client  
5   device and said group clerk;

6           said means for decrypting said different version for each of said determined communities  
7 further comprises:  
8           means for sending said different version to said group clerk on said secure session;  
9           means for receiving said sent different version by said group clerk;  
10           means for verifying, by said group clerk, that said requesting user or process is one  
11 of said authorized members of said determined community associated with said different version;  
12           means for decrypting said different version using a private key of said one member  
13 which is associated with said public key which was used for encryption;  
14           means for returning said decrypted different version from said group clerk to said  
15 client device on said secure session; and  
16           means for receiving said decrypted different version at said client device; and  
17           said means for decrypting selected ones of said encrypted elements in said requested  
18 output document is executed at said client device using said received decrypted different version.

19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50.    The system according to Claim 44, Claim 48, or Claim 49, wherein said means for  
rendering further comprises means for rendering a substitute text message for any of said selected  
encrypted elements in said requested output document which cannot be decrypted by said means  
for decrypting said requested output document.

1       51.    The system according to Claim 46, wherein:  
2           said means for contacting said group clerk further comprises:  
3           means for locating said group clerk; and

means for establishing a session between said client device and said group clerk;  
and

said means for decrypting selected ones of said encrypted elements in said requested  
output document further comprises:

means for locating said different version of said random encryption key which was  
encrypted using said public key of said one member, wherein said one member is said expanded  
group of which said requesting user or process is one of said expanded group members;

means for digitally signing, by said requesting user or process, said located version  
and an element encrypted with said different version, thereby creating a first digital signature;

means for sending said first digital signature, said located different version, and  
said element to said group clerk on said session;

means for receiving said sent first digital signature, said different version, and said  
element by said group clerk;

means for verifying said first digital signature by said group clerk;

means for verifying, by said group clerk, that said requesting user or process is one  
of said authorized members of said determined community associated with said different version;

means for decrypting said different version using a private key of said one member  
which is associated with said public key which was used for encryption;

means for decrypting said element using said decrypted different version;

means for re-encrypting said decrypted element using a public key of said  
requesting user or process, thereby creating a re-encrypted element;



25 means for digitally signing said re-encrypted element by said group clerk, thereby  
26 creating a second digital signature;  
27 means for returning said second digital signature and said re-encrypted element  
28 from said group clerk to said client device on said session;  
29 means for receiving said second digital signature and said re-encrypted element at  
30 said client device; and  
31 means for verifying said second digital signature by said requesting user or  
32 process.

52. The system according to Claim 28, wherein said DTD is replaced by a schema.

53. The system according to Claim 37, wherein said encryption requirement further comprises  
specification of an encryption key length.

54. The system according to Claim 36, wherein said inserted encryption tags may surround  
either values of said elements or values and tags of said elements.

55. A method for enforcing security policy using style sheet processing, comprising the steps  
of:  
providing an input document;

4 providing one or more stored policy enforcement objects, wherein each of said stored  
5 policy enforcement objects specifies a security policy to be associated with zero or more elements  
6 of said input document;

7 providing a Document Type Definition (DTD) corresponding to said input document,  
8 wherein said DTD has been augmented with one or more references to selected ones of said  
9 stored policy enforcement objects;

10 executing an augmented style sheet processor, further comprising the steps of:

11 loading said DTD;

12 resolving each of said one or more references in said loaded DTD;

13 instantiating said policy enforcement objects associated with said resolved  
14 references;

15 executing selected ones of said instantiated policy enforcement objects during  
16 application of one or more style sheets to said input document, wherein a result of said step of  
17 executing selected ones is an interim transient document reflecting said execution;

18 generating one or more random encryption keys;

19 encrypting selected elements of said interim transient document, wherein a  
20 particular one of said generated random encryption keys may be used to encrypt one or more of  
21 said selected elements, while leaving zero or more other elements of said interim transient  
22 document unencrypted;

23 encrypting each of said one or more random encryption keys; and

24 creating an encrypted output document comprising said zero or more other  
25 unencrypted elements, said selected encrypted elements, and said encrypted encryption keys;

26            requesting, from a user or process on a client device, said encrypted output document,  
27            wherein said user or process is a member of a particular group authorized to view at least one of  
28            said selected encrypted elements;  
29            receiving said requested output document at said client device; and  
30            executing an augmented document processor on said client device, further comprising the  
31            steps of:  
32                   contacting a clerk of said particular group for decryption of selected ones of said  
33            encrypted encryption keys; and  
34                   decrypting said requested output document using said decrypted selected ones of  
35            said encrypted encryption keys, thereby creating a result document.

56.        The method according to Claim 55, further comprising the step of rendering said result  
document on said client device.

57.        The method according to Claim 55, wherein said interim transient document comprises  
one or more encryption tags identifying elements needing encryption.

58.        The method according to Claim 55, wherein said input document is specified in an  
Extensible Markup Language (XML) notation.

59.        The method according to Claim 58, wherein said result document is specified in said XML  
notation.

1 60. The method according to Claim 55, wherein said stored policy enforcement objects further  
2 comprise executable code for overriding a method for evaluating said elements of said input  
3 document, and wherein said executing selected ones step further comprises overriding said  
4 method for evaluating.

1 61. The method according to Claim 60, wherein said style sheets are specified in an Extensible  
2 Stylesheet Language (XSL) notation.

1 62. The method according to Claim 61, wherein said method is a value-of method of said XSL  
2 notation, and wherein said step of overriding said value-of method is by subclassing said value-of  
3 method.  
4

1 63. The method according to Claim 60 or Claim 62, wherein:  
2 said step of overriding further comprises the steps of:

3 generating encryption tags; and

4 inserting said generated encryption tags into said interim transient document to  
5 surround elements of said interim transient document which are determined to require encryption;  
6 and

7 said step of encrypting selected elements encrypts those elements surrounded by said  
8 inserted encryption tags.

1 64. The method according to Claim 56, wherein:

2 each of said instantiated policy enforcement objects further comprises:

3 a specification of a community that is authorized to view said elements associated  
4 with said security policy, said specification of said communities further comprising specification of  
5 at least one of: (1) one or more individual users or processes which are community members, and  
6 (2) one or more groups which are community members, wherein each of said groups comprises  
7 one or more individual users or processes; and

8 an encryption requirement for said elements associated with said security policy;  
9 and

10 wherein said particular group is specified as one of said community members.

11 65. The method according to Claim 64, wherein said encryption requirement further  
12 comprises specification of an encryption algorithm.

13 66. The method according to Claim 64, wherein said encryption requirement further  
14 comprises specification of an encryption algorithm strength value.

1 67. The method according to Claim 64, wherein:

2 said step of encrypting said encryption keys further comprises the step of encrypting a  
3 different version of each of said random encryption keys for each of said one or more members of  
4 each of zero or more of said communities which uses said encryption key, and wherein each of

5 said different versions is encrypted using a public key of said community member for which said  
6 different version was encrypted.

1 68. The method according to Claim 64, wherein said encryption requirement may have a null  
2 value to indicate that said specified security policy does not require encryption.

1 69. The method according to Claim 55, wherein said step of encrypting selected elements uses  
2 a cipher block chaining mode encryption process.

1 70. The method according to Claim 67, further comprising the step of:  
2 creating a key class for each unique community, wherein said key class is associated with  
3 each of said encrypted elements for which this unique community is an authorized viewer, and  
4 wherein said key class comprises: (1) a strongest encryption requirement of said associated  
5 encrypted elements; (2) an identifier of each of said members of said unique community; and (3)  
6 one of said different versions of said encrypted encryption key for each of said identified  
7 community members; and

8 wherein:

9 said step of generating said one or more random encryption keys generates a  
10 particular one of said random encryption keys for each of said key classes, and wherein each of  
11 said different versions in a particular key class is encrypted from said generated encryption key  
12 generated for said key class; and

13                   said step of encrypting selected elements uses that one of said particular random  
14 encryption keys which was generated for said key class with which said selected element is  
15 associated.

1       71.     The method according to Claim 67, wherein:

2                   said step of decrypting said requested output document further comprises the steps of:

3                   expanding said one or more groups of said communities to determine said  
4 individual users or processes in each of said expanded groups;

5                   determining one or more of said expanded communities of which said requesting  
6 user or process is one of said expanded group members;

7                   decrypting, for each of said determined communities, said different version of said  
8 random encryption key which was encrypted using said public key of said one member, wherein  
9 said one member is said expanded group of which said requesting user or process is one of said  
10 expanded group members, thereby creating a decrypted key for each of said determined  
11 communities; and

12                  decrypting selected ones of said encrypted elements in said requested output  
13 document using said decrypted keys, wherein said selected ones of said encrypted elements are  
14 those which were encrypted for one of said determined communities; and

15                  said step of rendering further comprises the step of:

16                  rendering said decrypted selected ones and said other unencrypted elements.

1       72.     The method according to Claim 71, wherein:

2           said step of contacting said group clerk further comprises the steps of:

3                 locating said group clerk; and

4                 establishing a session between said client device and said group clerk;

5           said step of decrypting said different version for each of said determined communities

6 further comprises the steps of:

7                 digitally signing said different version by said requesting user or process, thereby

8 creating a first digital signature;

9                 sending said first digital signature and said different version to said group clerk on

10 said session;

11                 receiving said sent first digital signature and said different version by said group

12 clerk;

13                 verifying said first digital signature by said group clerk;

14                 verifying, by said group clerk, that said requesting user or process is one of said

15 authorized members of said determined community associated with said different version;

16                 decrypting said different version using a private key of said one member which is

17 associated with said public key which was used for encryption;

18                 re-encrypting said decrypted different version using a public key of said requesting

19 user or process, thereby creating a re-encrypted key;

20                 digitally signing said re-encrypted key by said group clerk, thereby creating a

21 second digital signature;

22                 returning said second digital signature and said re-encrypted key from said group

23 clerk to said client device on said session;



24 receiving said second digital signature and said re-encrypted key at said client  
25 device;  
26 verifying said second digital signature at said client device; and  
27 decrypting, at said client device, said received re-encrypted key using a private key  
28 of said requesting user or process, creating said decrypted key; and  
29 said step of decrypting selected ones of said encrypted elements in said requested output  
30 document is executed at said client device using said decrypted key.

1 73. The method according to Claim 67, wherein:

2 said step of decrypting said requested output document further comprises the steps of:  
3 expanding said one or more groups of said communities to determine said  
4 individual users or processes in each of said expanded groups;  
5 determining one or more of said expanded communities of which said requesting  
6 user or process is one of said expanded group members; and  
7 decrypting selected ones of said encrypted elements in said requested output  
8 document, wherein said selected ones of said encrypted elements are those which were encrypted  
9 for one of said determined communities; and  
10 said step of rendering further comprises the step of:  
11 rendering said returned decrypted elements and said other unencrypted elements.

1 74. The method according to Claim 73, wherein:

2 said step of contacting said group clerk further comprises the steps of:

3                    locating said group clerk; and  
4                    establishing a mutually-authenticated secure session between said client device and  
5                    said group clerk; and  
6                    said step of decrypting selected ones of said encrypted elements in said requested output  
7                    document further comprises the steps of:  
8                    locating said different version of said random encryption key which was encrypted  
9                    using said public key of said one member, wherein said one member is said expanded group of  
10                    which said requesting user or process is one of said expanded group members;  
11                    sending said located different version to said group clerk, along with an element  
12                    encrypted with said different version, on said secure session;  
13                    receiving said sent different version and said element by said group clerk;  
14                    verifying, by said group clerk, that said requesting user or process is one of said  
15                    authorized members of said determined community associated with said different version;  
16                    decrypting said different version using a private key of said one member which is  
17                    associated with said public key which was used for encryption;  
18                    decrypting said element using said decrypted different version; and  
19                    returning said decrypted element from said group clerk to said client device on said  
20                    secure session.

1        75.     The method according to Claim 70, wherein:

2                    said step of contacting said group clerk further comprises the steps of:

3                    locating said group clerk; and

4 establishing a mutually-authenticated secure session between said client device and  
5 said group clerk;

6 said step of decrypting said requested output document further comprises the steps of:

7 expanding said one or more groups of said communities to determine said  
8 individual users or processes in each of said expanded groups;

9 determining one or more of said key classes which identify said requesting user or  
10 process as one of said expanded group members;

11 decrypting, for each of said determined key classes, said different version of said  
12 random encryption key in said key class which was encrypted using said public key of said one  
13 member, wherein said step of decrypting uses a private key of said one member which is  
14 associated with said public key which was used for encryption, thereby creating a decrypted key;  
15 and

16 decrypting selected ones of said encrypted elements in said requested output  
17 document using said decrypted keys, wherein said selected ones of said encrypted elements are  
18 those which were encrypted for said key class; and

19 said step of rendering further comprises the step of:

20 rendering said decrypted selected ones and said other unencrypted elements.

1 76. The method according to Claim 71, wherein:

2 said step of contacting said group clerk further comprises the steps of:

3 locating said group clerk; and

4 establishing a mutually-authenticated secure session between said client device and  
5 said group clerk;

6 said step of decrypting said different version for each of said determined communities  
7 further comprises the steps of:

8 sending said different version to said group clerk on said secure session;

9 receiving said sent different version by said group clerk;

10 verifying, by said group clerk, that said requesting user or process is one of said  
11 authorized members of said determined community associated with said different version;

12 decrypting said different version using a private key of said one member which is  
13 associated with said public key which was used for encryption;

14 returning said decrypted different version from said group clerk to said client  
15 device on said secure session; and

16 receiving said decrypted different version at said client device; and

17 said step of decrypting selected ones of said encrypted elements in said requested output  
18 document is executed at said client device using said received decrypted different version.

1 77. The method according to Claim 71, Claim 75, or Claim 76, wherein said step of rendering  
2 further comprises the step of rendering a substitute text message for any of said selected  
3 encrypted elements in said requested output document which cannot be decrypted by said step of  
4 decrypting said requested output document.

1 78. The method according to Claim 73, wherein:

said step of contacting said group clerk further comprises the steps of:

locating said group clerk; and

establishing a session between said client device and said group clerk; and

said step of decrypting selected ones of said encrypted elements in said requested output document further comprises the steps of:

locating said different version of said random encryption key which was encrypted using said public key of said one member, wherein said one member is said expanded group of which said requesting user or process is one of said expanded group members;

digitally signing, by said requesting user or process, said located version and an element encrypted with said different version, thereby creating a first digital signature;

sending said first digital signature, said located different version, and said element to said group clerk on said session;

receiving said sent first digital signature, said different version, and said element by said group clerk;

verifying said first digital signature by said group clerk;

verifying, by said group clerk, that said requesting user or process is one of said authorized members of said determined community associated with said different version;

decrypting said different version using a private key of said one member which is associated with said public key which was used for encryption;

decrypting said element using said decrypted different version;

re-encrypting said decrypted element using a public key of said requesting user or process, thereby creating a re-encrypted element;

24                   digitally signing said re-encrypted element by said group clerk, thereby creating a  
25                   second digital signature;  
26                   returning said second digital signature and said re-encrypted element from said  
27                   group clerk to said client device on said session;  
28                   receiving said second digital signature and said re-encrypted element at said client  
29                   device; and  
30                   verifying said second digital signature by said requesting user or process.

1           79.     The method according to Claim 55, wherein said DTD is replaced by a schema.

10           80.     The method according to Claim 64, wherein said encryption requirement further  
20           comprises specification of an encryption key length.

30           81.     The method according to Claim 63, wherein said inserted encryption tags may surround  
40           either values of said elements or values and tags of said elements.

## ABSTRACT

A method, system, and computer program product for selectively encrypting one or more elements of a document using style sheet processing. Disclosed is a policy-driven augmented style sheet processor (e.g. an Extensible Stylesheet Language, or "XSL", processor) that creates a selectively-encrypted document (e.g. an Extensible Markup Language, or "XML", document) carrying key-distribution material, such that by using an augmented document processor (e.g. an augmented XML processing engine), an agent can recover only the information elements for which it is authorized. The Document Type Definition (DTD) or schema associated with a document is modified, such that the DTD or schema specifies a reference to stored security policy to be applied to document elements. Each document element may specify a different security policy, such that the different elements of a single document can be encrypted differently (and, some elements may remain unencrypted). The key distribution material enables a document to be encrypted for decryption by an audience that is unknown at the time of document creation, and enables access to the distinct elements of a single encrypted document to be controlled for multiple users and/or groups of users. In this manner, group collaboration is improved by giving more people easier access to information for which they are authorized, while protecting sensitive data from unauthorized agents. A key recovery technique is also defined, whereby the entire document can be decrypted by an authorized agent regardless of how the different elements were originally encrypted and the access protections which were applied to those elements.



Variable	Mean	SD	Min	Max	Skewness	Kurtosis	Normality
Age	34.5	12.5	18	65	-0.1	3.2	0.98
Gender	1.2	0.4	1	2	0.1	3.1	0.99
Education	12.5	2.5	9	16	-0.2	3.3	0.97
Income	1500	500	500	3000	0.5	3.5	0.95
Marital Status	1.5	0.5	1	2	0.2	3.2	0.98
Occupation	2.5	1.5	1	5	-0.3	3.4	0.96
Health Status	1.8	0.8	1	3	0.1	3.1	0.99
Stress Level	3.5	1.5	1	5	-0.1	3.2	0.98
Life Satisfaction	4.2	1.2	1	5	0.2	3.3	0.97
Resilience	3.8	1.0	1	5	-0.2	3.4	0.96
Optimism	4.0	1.1	1	5	0.1	3.2	0.98
Emotional Stability	3.6	1.3	1	5	-0.3	3.5	0.95
Self-Esteem	4.1	1.0	1	5	0.2	3.3	0.97
Life Purpose	3.9	1.2	1	5	-0.1	3.4	0.96
Gratitude	4.3	1.1	1	5	0.1	3.2	0.98
Forgiveness	4.0	1.0	1	5	0.2	3.3	0.97
Resilience	3.8	1.0	1	5	-0.2	3.4	0.96
Optimism	4.0	1.1	1	5	0.1	3.2	0.98
Emotional Stability	3.6	1.3	1	5	-0.3	3.5	0.95
Self-Esteem	4.1	1.0	1	5	0.2	3.3	0.97
Life Purpose	3.9	1.2	1	5	-0.1	3.4	0.96
Gratitude	4.3	1.1	1	5	0.1	3.2	0.98
Forgiveness	4.0	1.0	1	5	0.2	3.3	0.97





**(Prior Art)**

300

```

331 321
    <?xml encoding="UTF-8" ?>
311
312 322
310<!ENTITY % empl_mgr_hr "ldap://acmecorp.com/cn=emh,ou=policy,o=acme">
320<!ENTITY % empl_medical "ldap://acmecorp.com/cn=em,ou=policy,o=acme">
330<!ENTITY % unrestricted "ldap://acmecorp.com/cn=ur1,ou=policy,o=acme">
    <ELEMENT record (empl_name,ser_nbr,date_of_hire,curr_salary,medical_condition)*>
    <ELEMENT empl_name (#PCDATA) > 332
350 <!ATTLIST empl_name 353 354 355 356
352 datapolicy:url CDATA #FIXED %unrestricted; >
    <ELEMENT ser_nbr (#PCDATA) >
360 <!ATTLIST ser_nbr
    datapolicy:url CDATA #FIXED %unrestricted; >
    <ELEMENT date_of_hire (#PCDATA) >
370 <!ATTLIST date_of_hire
    datapolicy:url CDATA #FIXED %unrestricted; >
    <ELEMENT curr_salary (#PCDATA) >
380 <!ATTLIST curr_salary
    datapolicy:url CDATA #FIXED %empl_mgr_hr; >
    <ELEMENT medical_condition (#PCDATA) >
390 <!ATTLIST medical_condition
    datapolicy:url CDATA #FIXED %empl_medical; >

```

Fig. 3

400

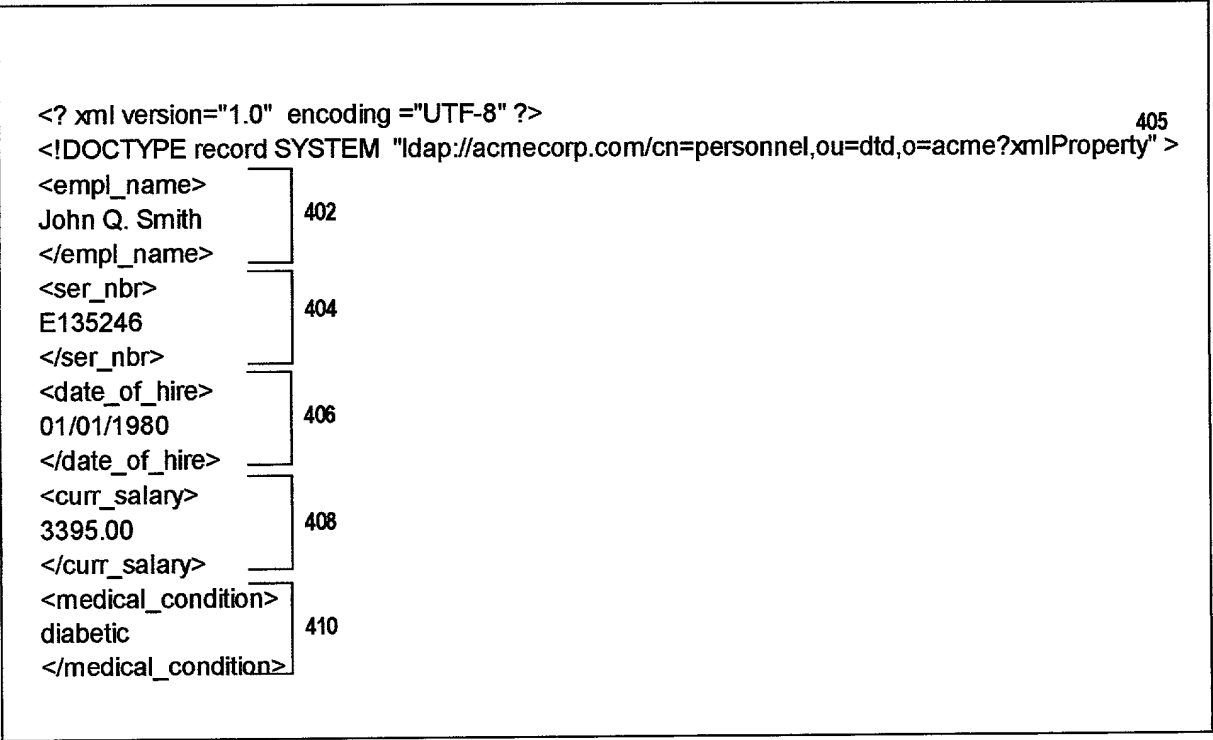


Fig. 4A

420

431 <? xml version="1.0" encoding ="UTF-8" ?>  
 <!DOCTYPE record SYSTEM "ldap://acmecorp.com/cn=personnel,ou=dtd,o=acme?xmlProperty" >  
 434 <encrypt: class name="1" type="3DES" len="168" tempkey="MjdqcmhIQHVzLmlibS5jb20xRzB">  
 431 <encrypt: key DN="cn=managers,ou=groups,o=acme" KeyIdentifier="MlIGEjCCBbygAwIBAgIKFZrHywAQ"  
 430 Ekey="QAAAAAAzANBgqhkiG9w0BAQUFAD"/>  
 432 <encrypt: key DN="cn=E135246,ou=users,o=acme" KeyIdentifier="CSqGSib3DQEJARYbYm9zc0BicnFQ"  
 433 Ekey="QudGlucmFsZWlnaC5pYm0uY29tMQ"/>  
 </encrypt: class>  
 444 <encrypt: class name="2" type="BLOWFISH" len="128" tempkey="AHIAcQBuaHQAYgAuAHIAyQ">  
 441 <encrypt: key DN="cn=doctors,ou=groups,o=acme" KeyIdentifier="QTA5MDMyMDQ0MTZaFw0wMDA5MDI"  
 440 Ekey="EgYDVQQLewdSYWxlaWdoMR"/>  
 442 <encrypt: key DN="cn=E135246,ou=users,o=acme" KeyIdentifier="CSqGSib3DQEJARYbYm9zc0BicnFQ"  
 Ekey="EwJVUzELMAkGA1UECBMCTk"/>  
 </encrypt: class>  
 <empl\_name>  
 John Q. Smith  
 </empl\_name>  
 <ser\_nbr ">  
 E135246  
 </ser\_nbr>  
 <date\_of\_hire>  
 01/01/1980  
 </date\_of\_hire>  
 <curr\_salary>  
 422 <encrypt: data class="1">  
 3395.00 423  
 </encrypt: data>  
 </curr\_salary>  
 <medical\_condition>  
 424 <encrypt: data class="2">  
 diabetic 425  
 </encrypt: data>  
 </medical\_condition>

Fig. 4B

450

<? xml version="1.0" encoding ="UTF-8" ?>  
<!DOCTYPE record SYSTEM "ldap://acmecorp.com/cn=personnel,ou=dtd,o=acme?xmlProperty" >

<encrypt: class name="1" type="3DES" len="168">  
 <encrypt: key DN="cn=managers,ou=groups,o=acme" KeyIdentifier="MIIGEjCCBbygAwIBAgIKFZrHywAQ"  
 Ekey="QAAAAAAzANBgqhkiG9w0BAQUFAD"/> 475  
 <encrypt: key DN="cn=E135246,ou=users,o=acme" KeyIdentifier="CSqGS1b3DQEJARYbYm9zc0BicnFQ"  
 Ekey="QudGlucmFsZWlnaC5pYm0uY29tMQ"/> 476  
 <encrypt: key DN="cn=hr,ou=groups,o=acme" KeyIdentifier="D1bQzc0BEYbCicnFSqGS3YJmAR9Q"  
 Ekey="dpYmGmFsZWVhbnR5bW0uY29tMQ"/> 477  
 </encrypt: class>

<encrypt: class name="2" type="BLOWFISH" len="128">  
 <encrypt: key DN="cn=doctors,ou=groups,o=acme" KeyIdentifier="QTA5MDMyMDQ0MTZaFw0wMDA5MDI"  
 Ekey="EgYDVQQLLEwdSYWwlaWdoMR"/>  
 <encrypt: key DN="cn=E135246,ou=users,o=acme" KeyIdentifier="CSqGS1b3DQEJARYbYm9zc0BicnFQ"  
 Ekey="EwJVUzELMAkGA1UECBMCTk"/>  
 </encrypt: class>

<empl\_name>  
John Q. Smith  
</empl\_name>  
<ser\_nbr ">  
E135246  
</ser\_nbr>  
<date\_of\_hire>  
01/01/1980  
</date\_of\_hire>  
<curr\_salary>  

<encrypt: data class="1">  
 Ym0uY29tMQ  
 </encrypt: data>

  
 </curr\_salary>  
 <medical\_condition>  

<encrypt: data class="2">  
 MxDDAKBgNVB  
 </encrypt: data>

  
 </medical\_condition>

Fig. 4C

Key Object - internal

500

distinguished name 501	X.509 certificate 502a	encrypted symmetric key 503
------------------------------	------------------------------	--------------------------------------

version number 501	serial number 502b	signature info 503	issuer 504	validity period 505	subject 506	public key info 507	certificate signature 508
--------------------------	--------------------------	--------------------------	---------------	---------------------------	----------------	---------------------------	---------------------------------

algorithm 509	subject public key 510
------------------	---------------------------------

Key Object - transmitted

510

distinguished name 501	X.509 certificate key identifier 502b	encrypted symmetric key 503
------------------------------	--	--------------------------------------

Fig. 5A

preprocessingKeyClass Object 520

encryption strength <b>521</b>	key class object <b>522</b>	plaintext symmetric key <b>523</b>
--------------------------------------	-----------------------------------	---


Fig. 5B

keyClass Object 530

class identifier <b>531</b>	encryption algorithm identifier <b>532</b>	key length <b>533</b>	optional hints for algorithm <b>534</b>	key object 1 <b>535</b>	key object 2 <b>536</b>	...	key object N <b>539</b>
-----------------------------------	---	-----------------------------	---	-------------------------------	-------------------------------	-----	-------------------------------

Fig. 5C

Fig. 6

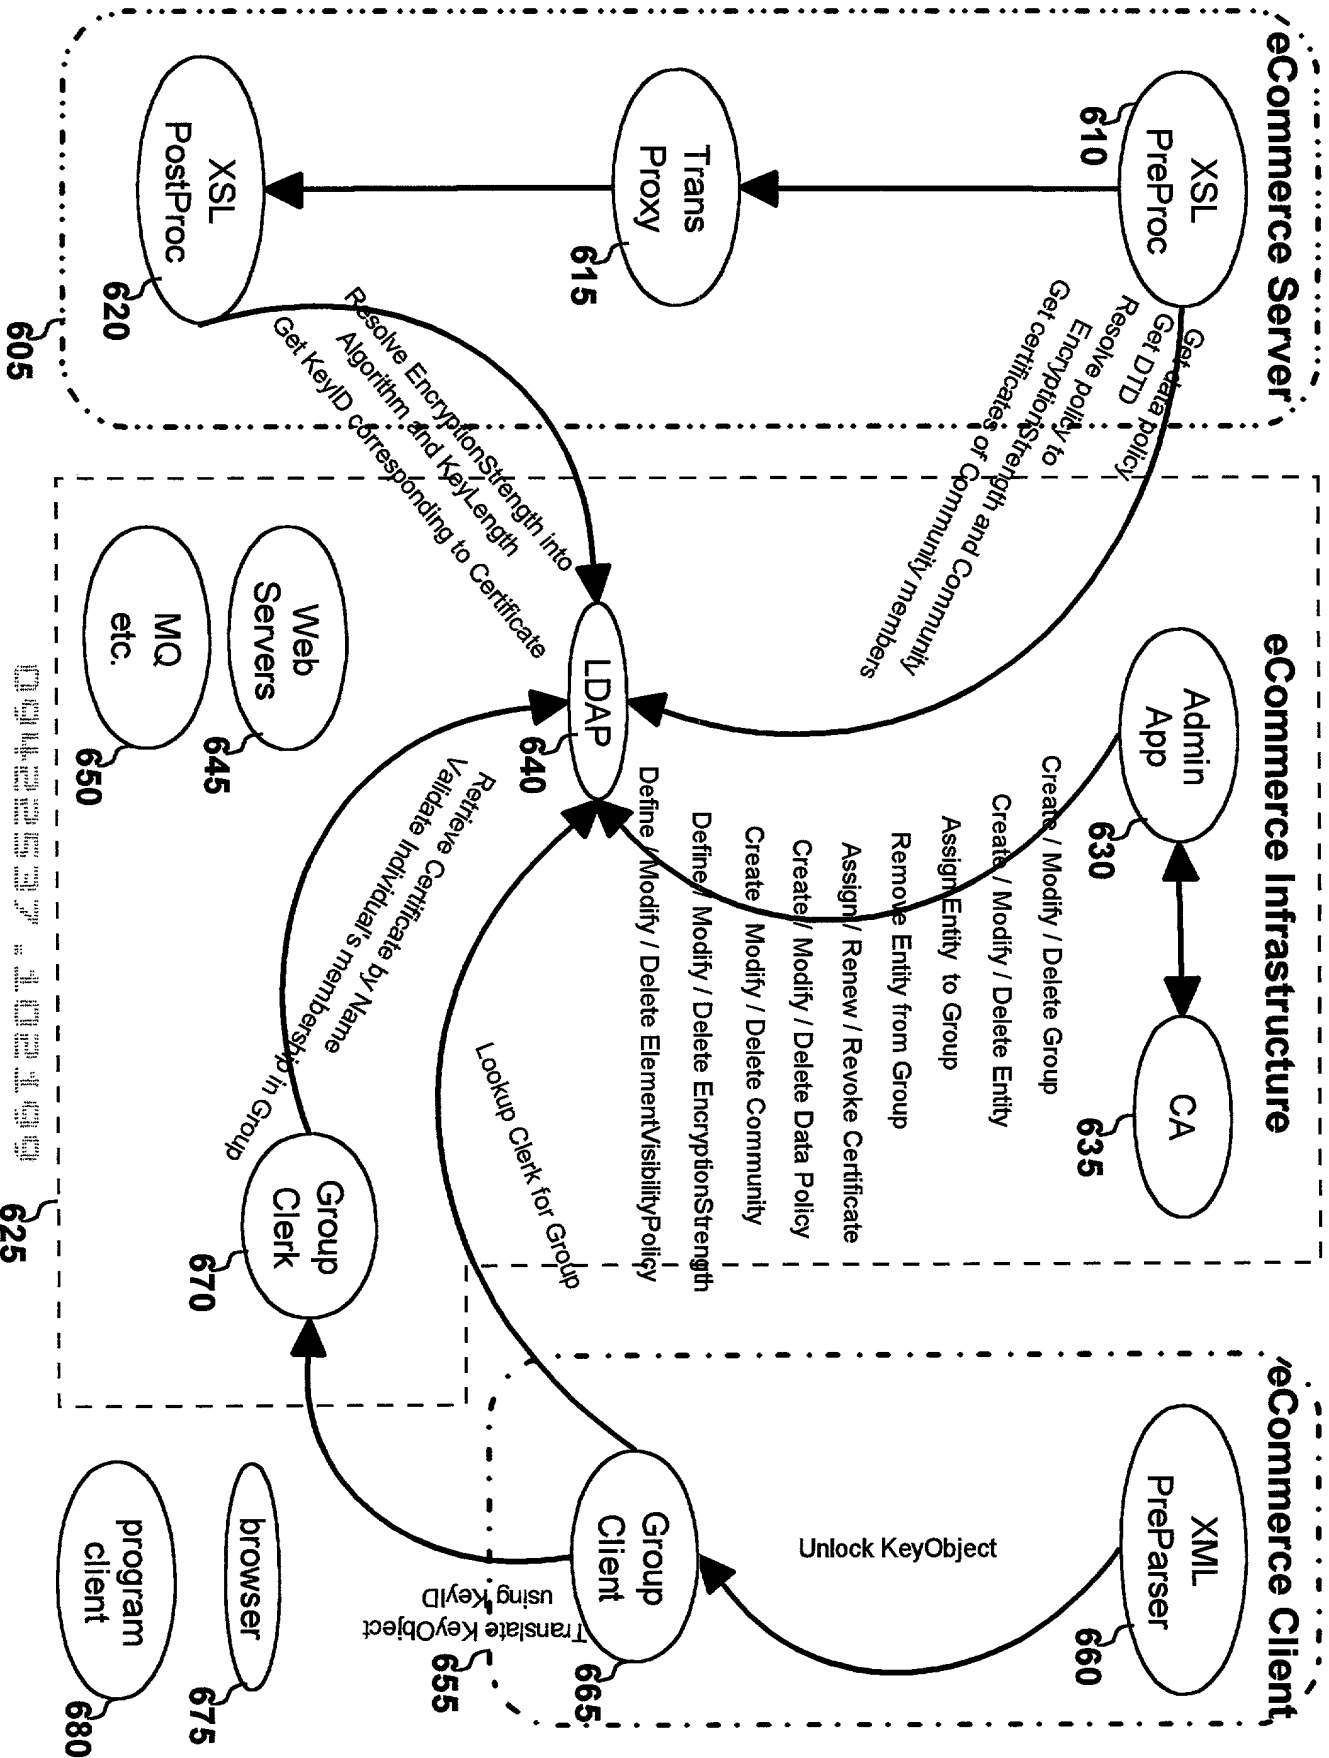



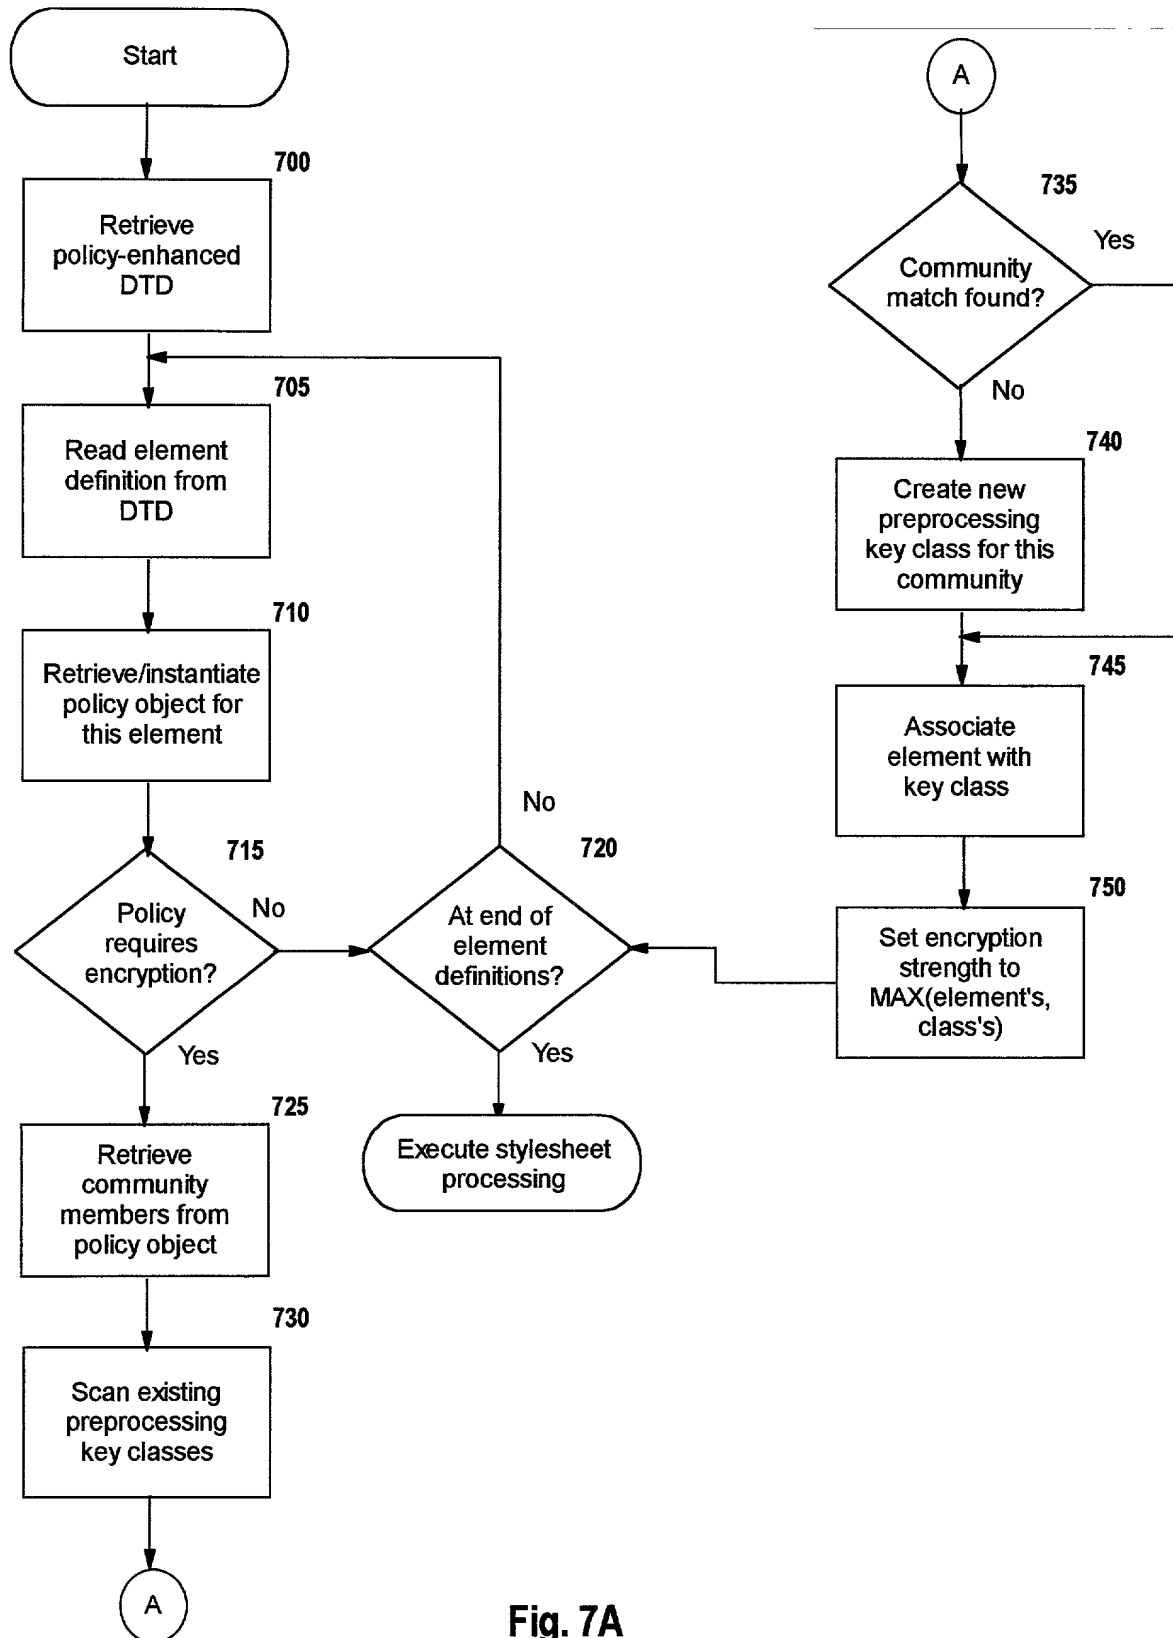


Fig. 7A

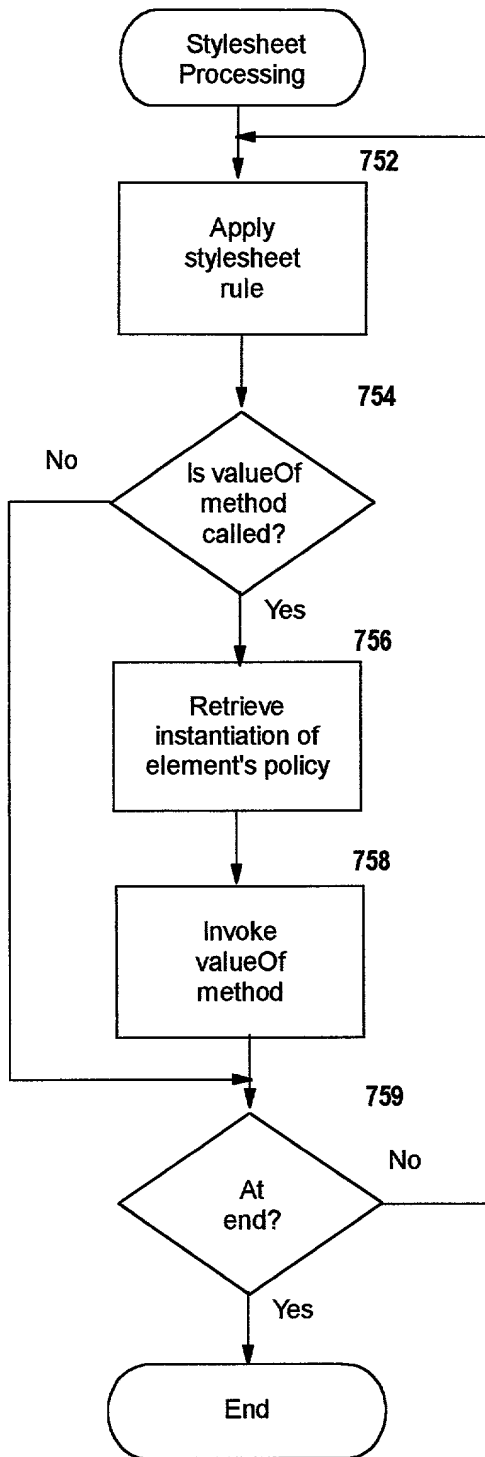


Fig. 7B

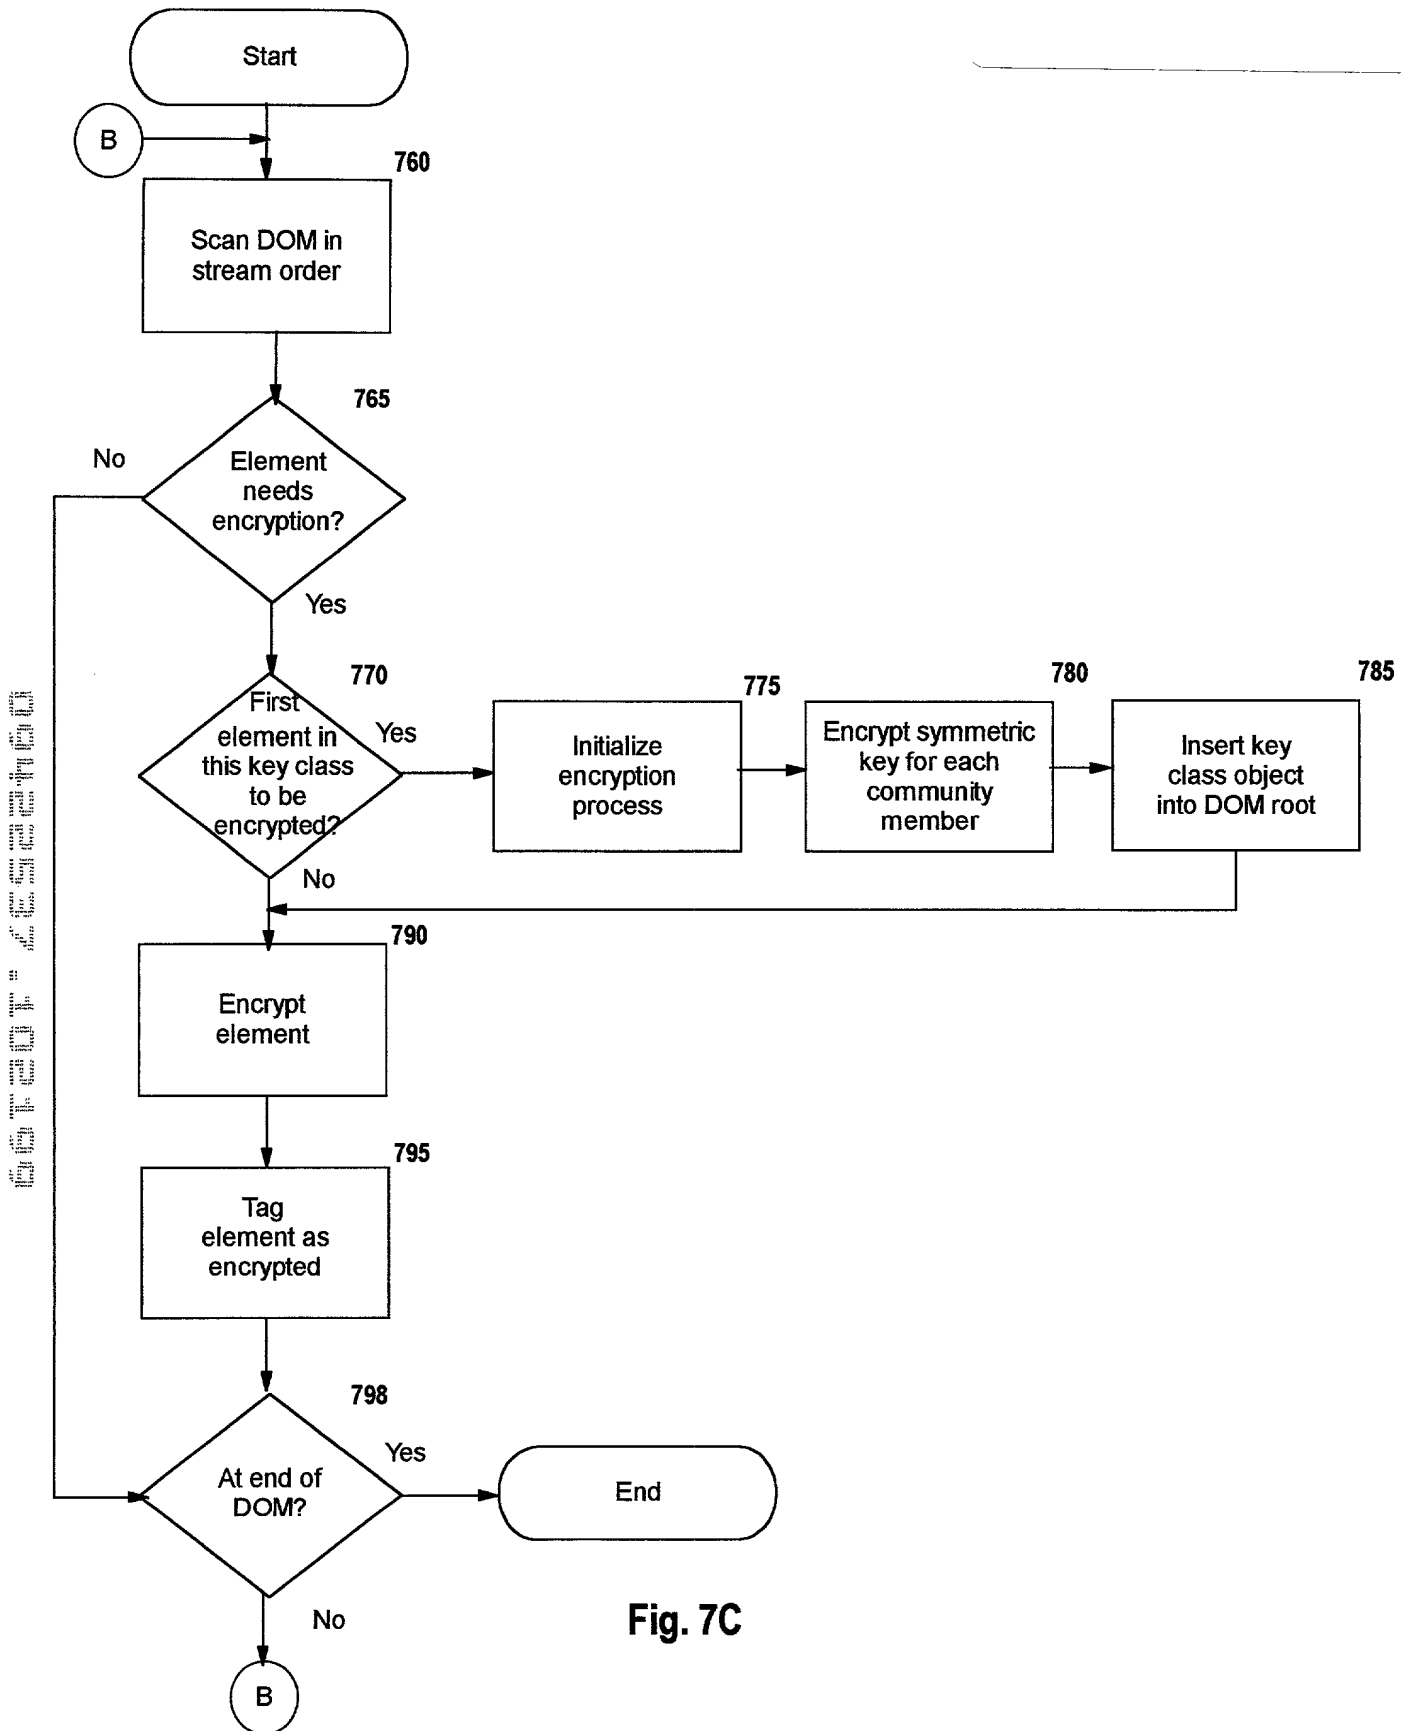


Fig. 7C

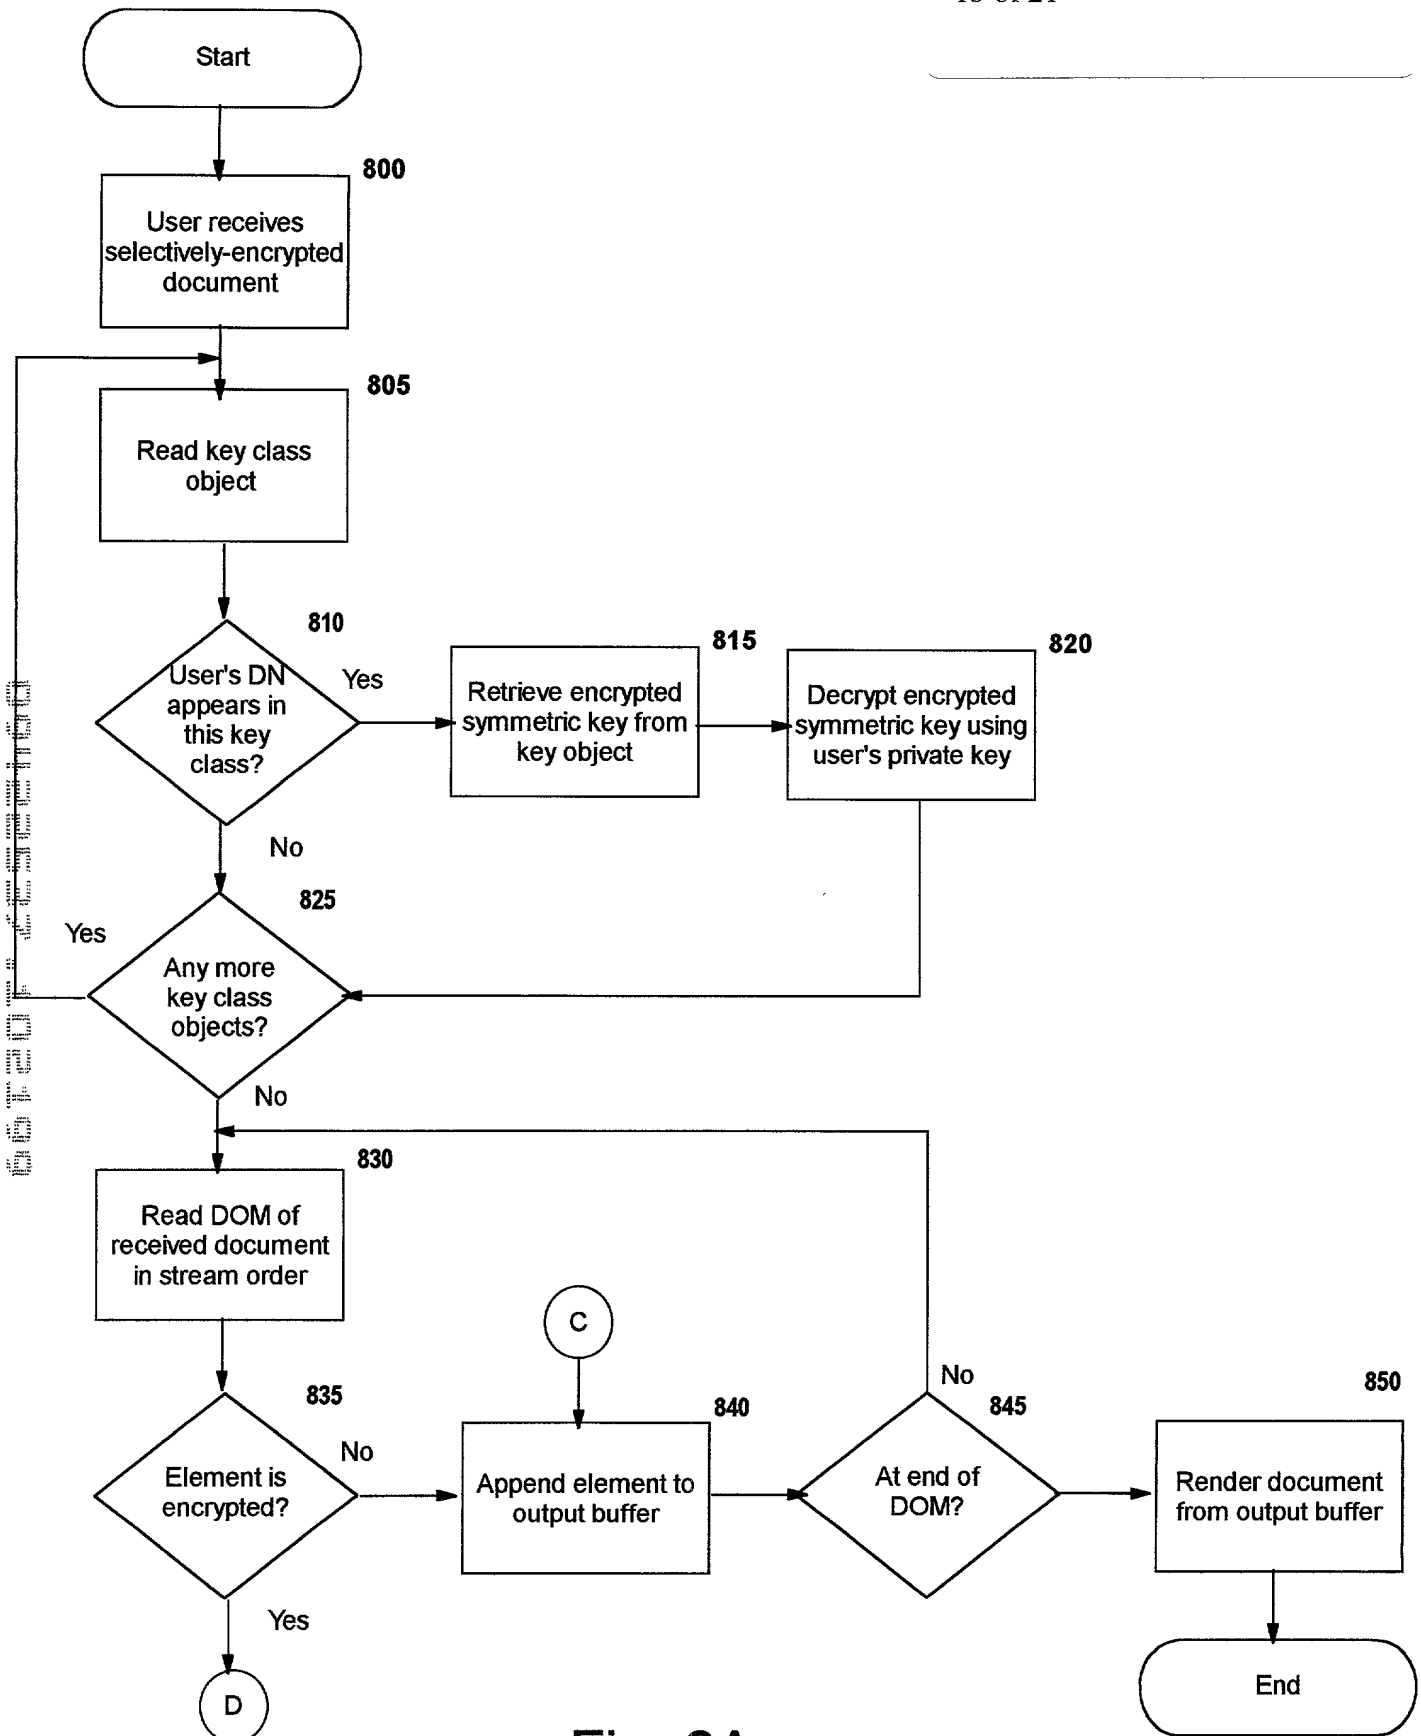


Fig. 8A

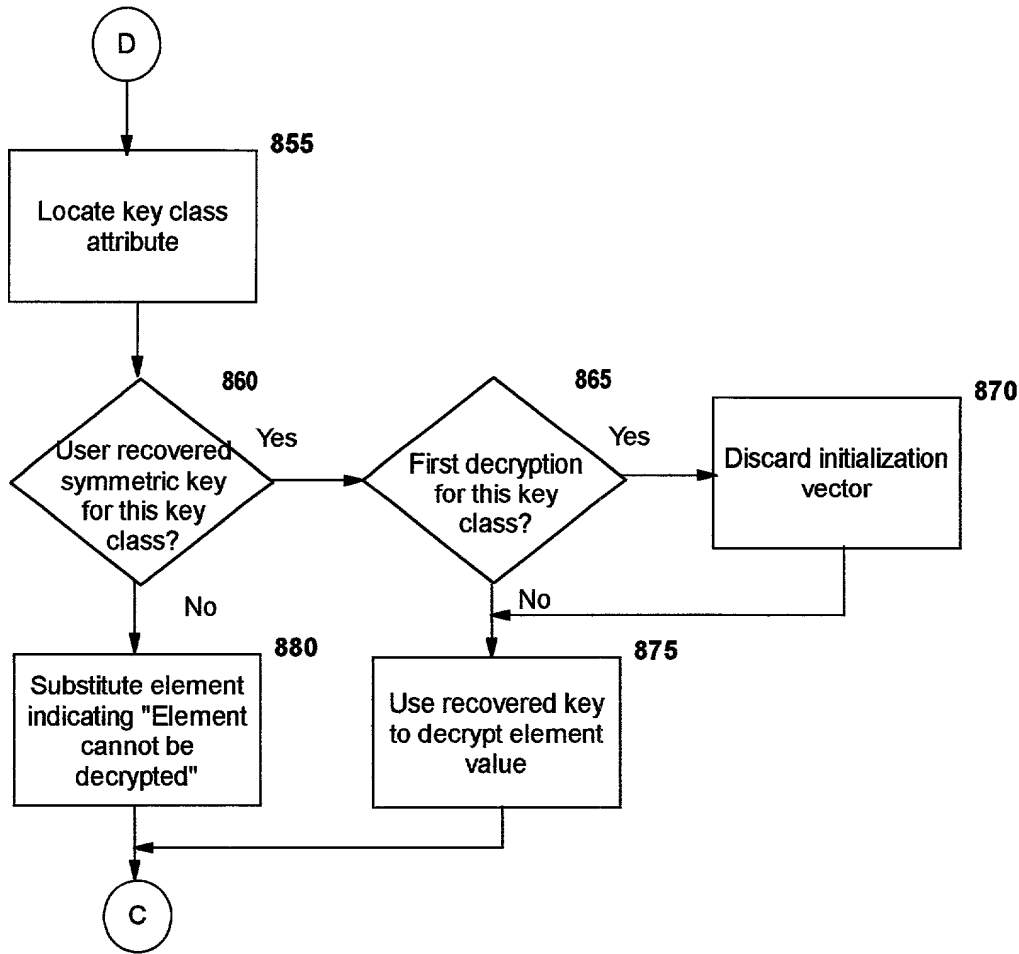


Fig. 8B

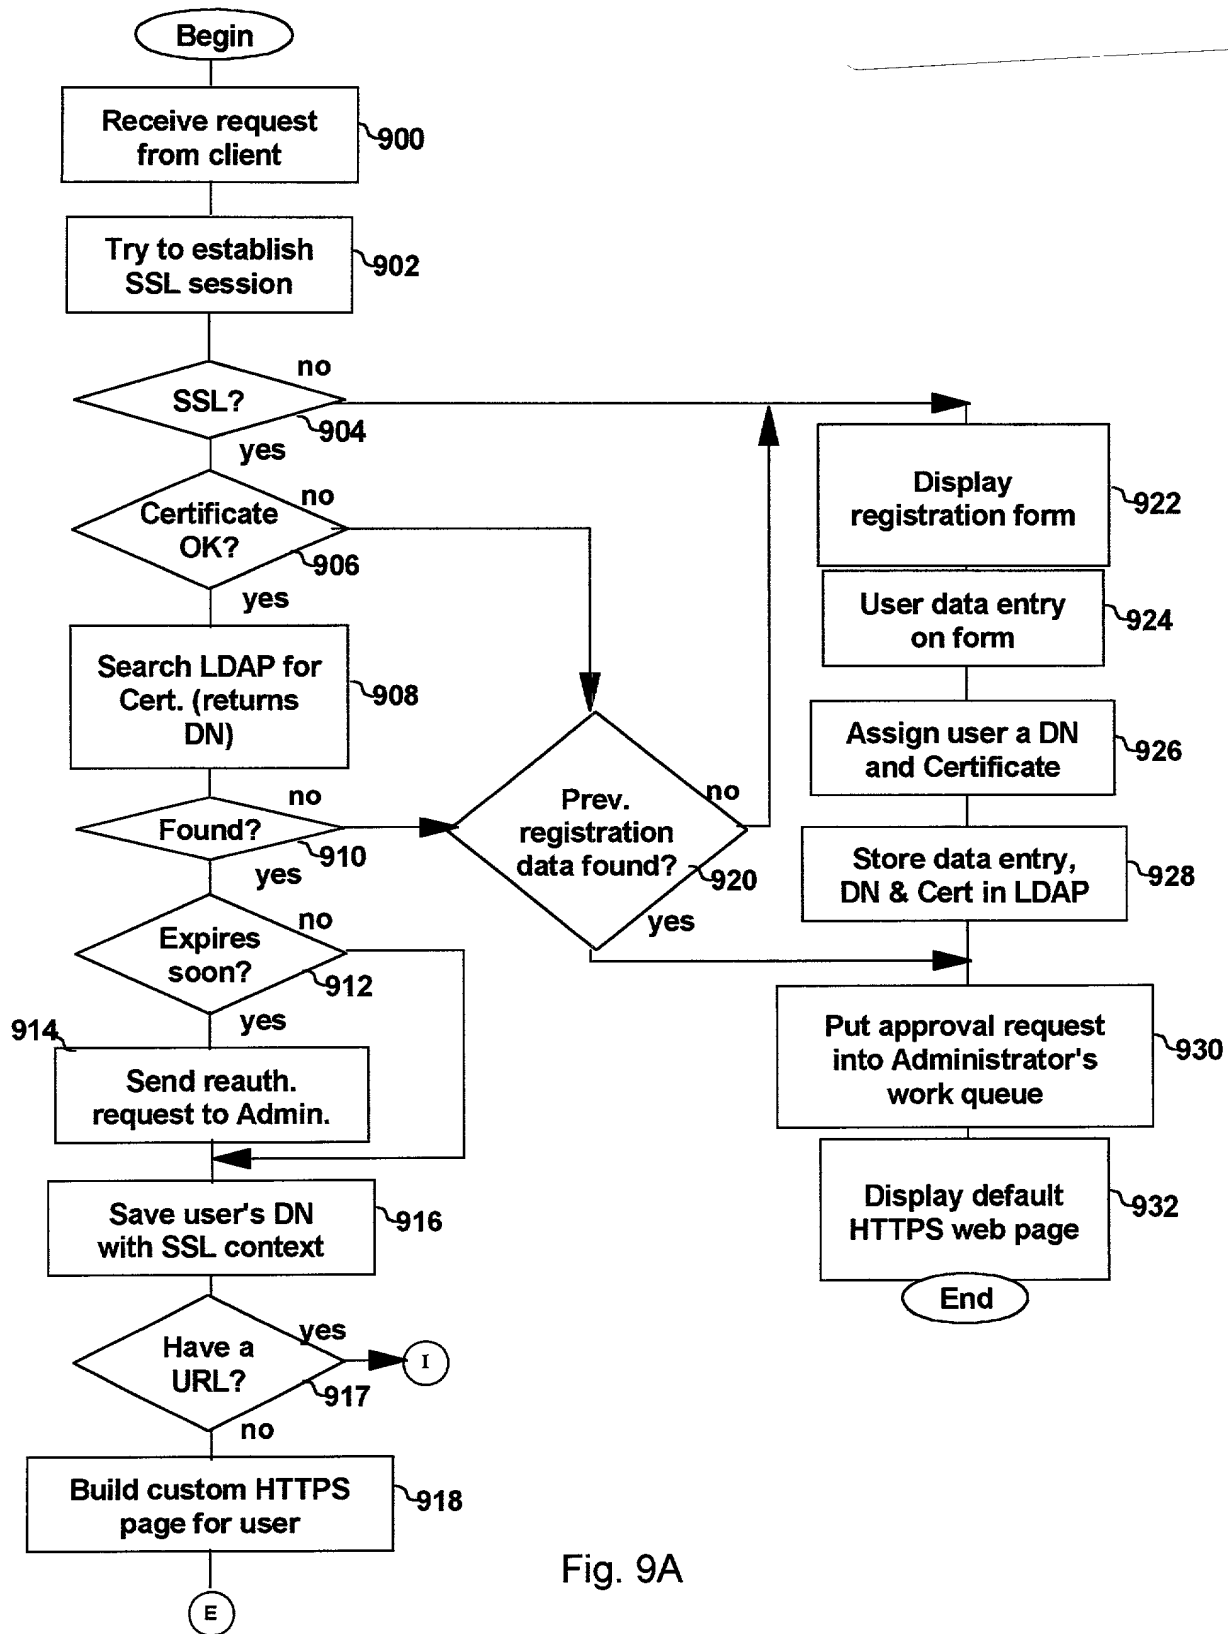
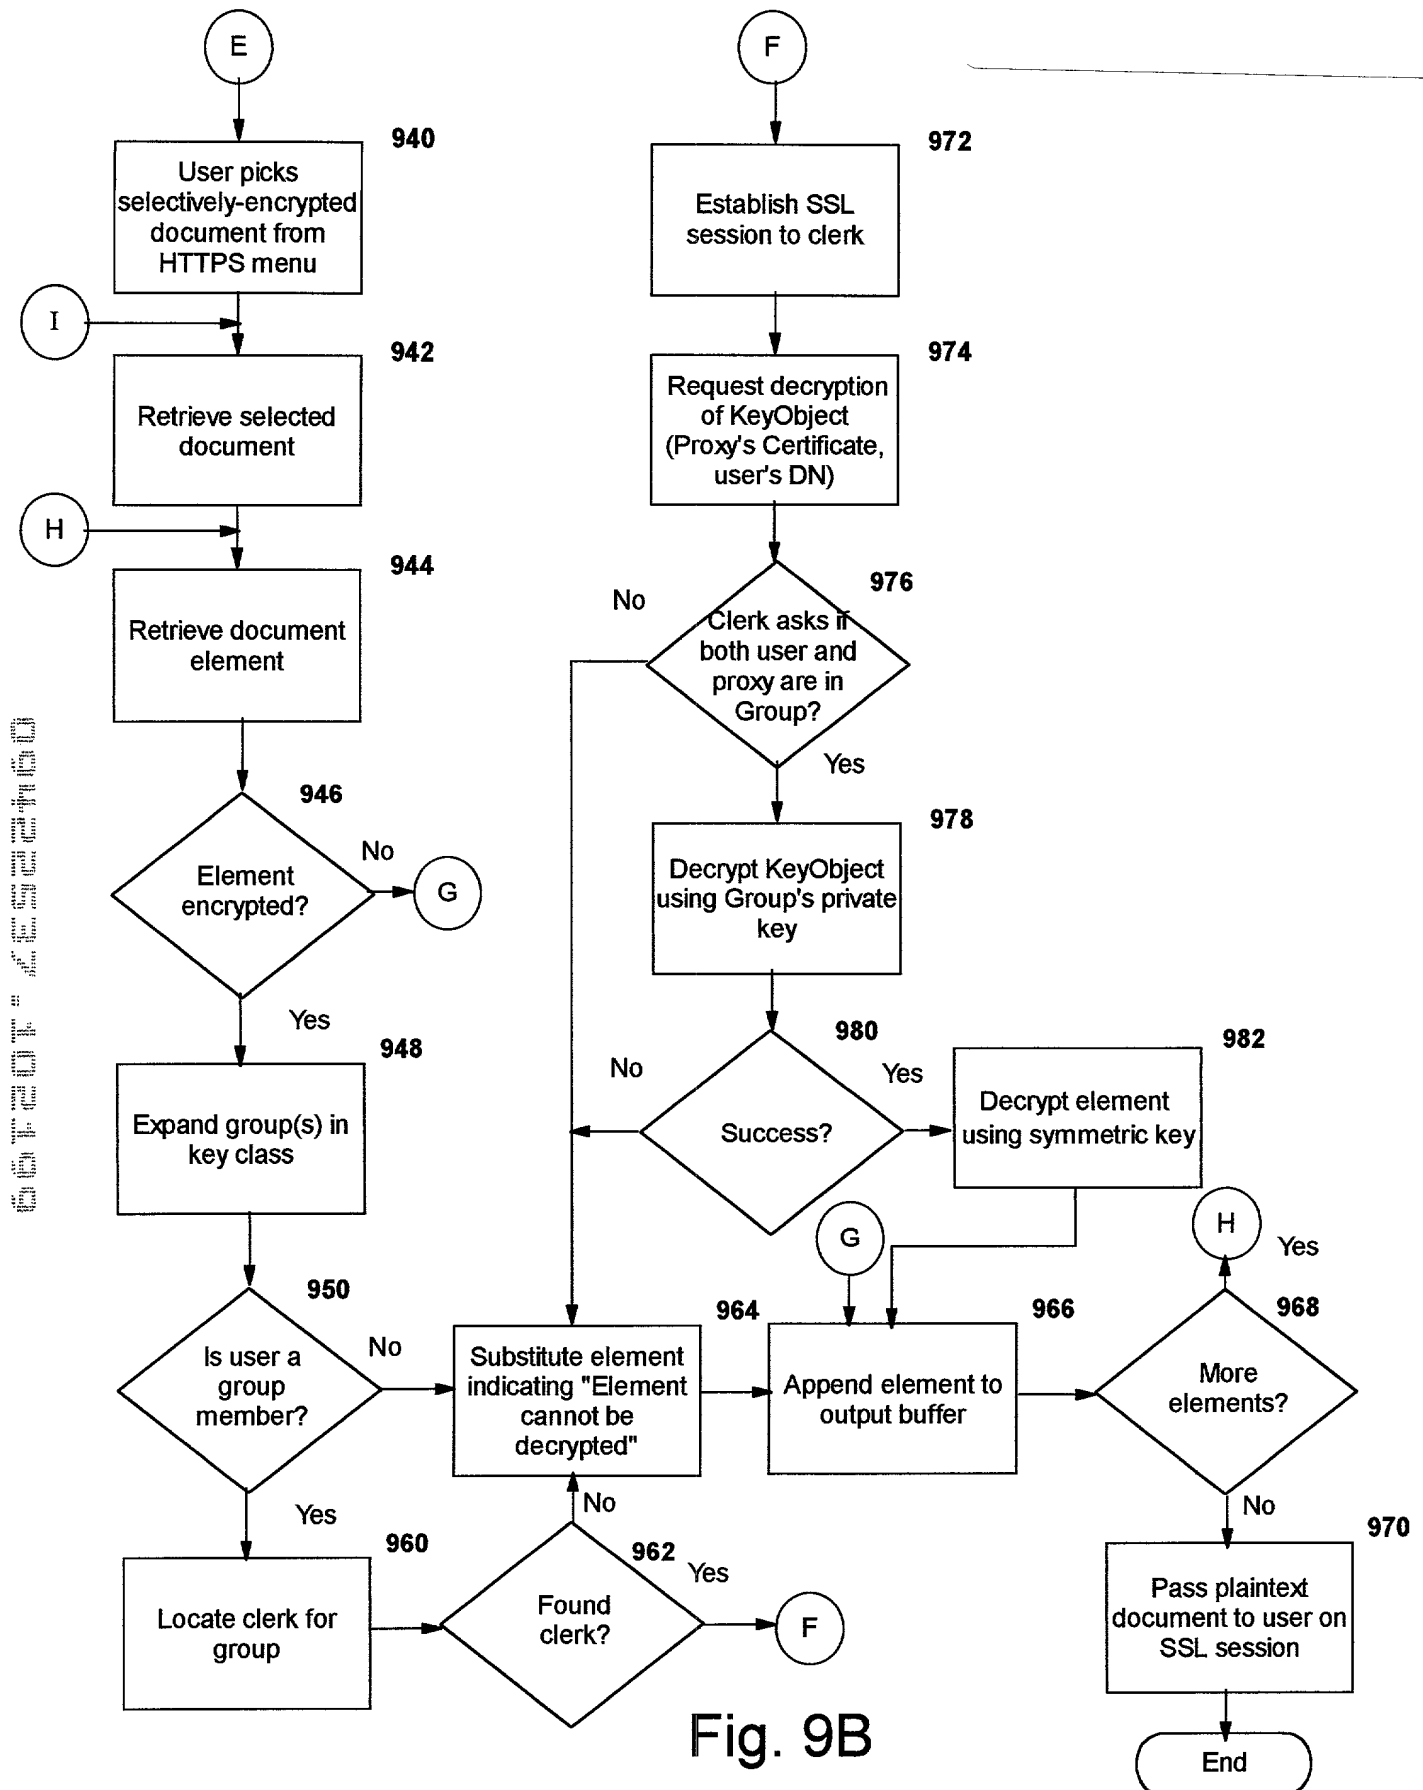
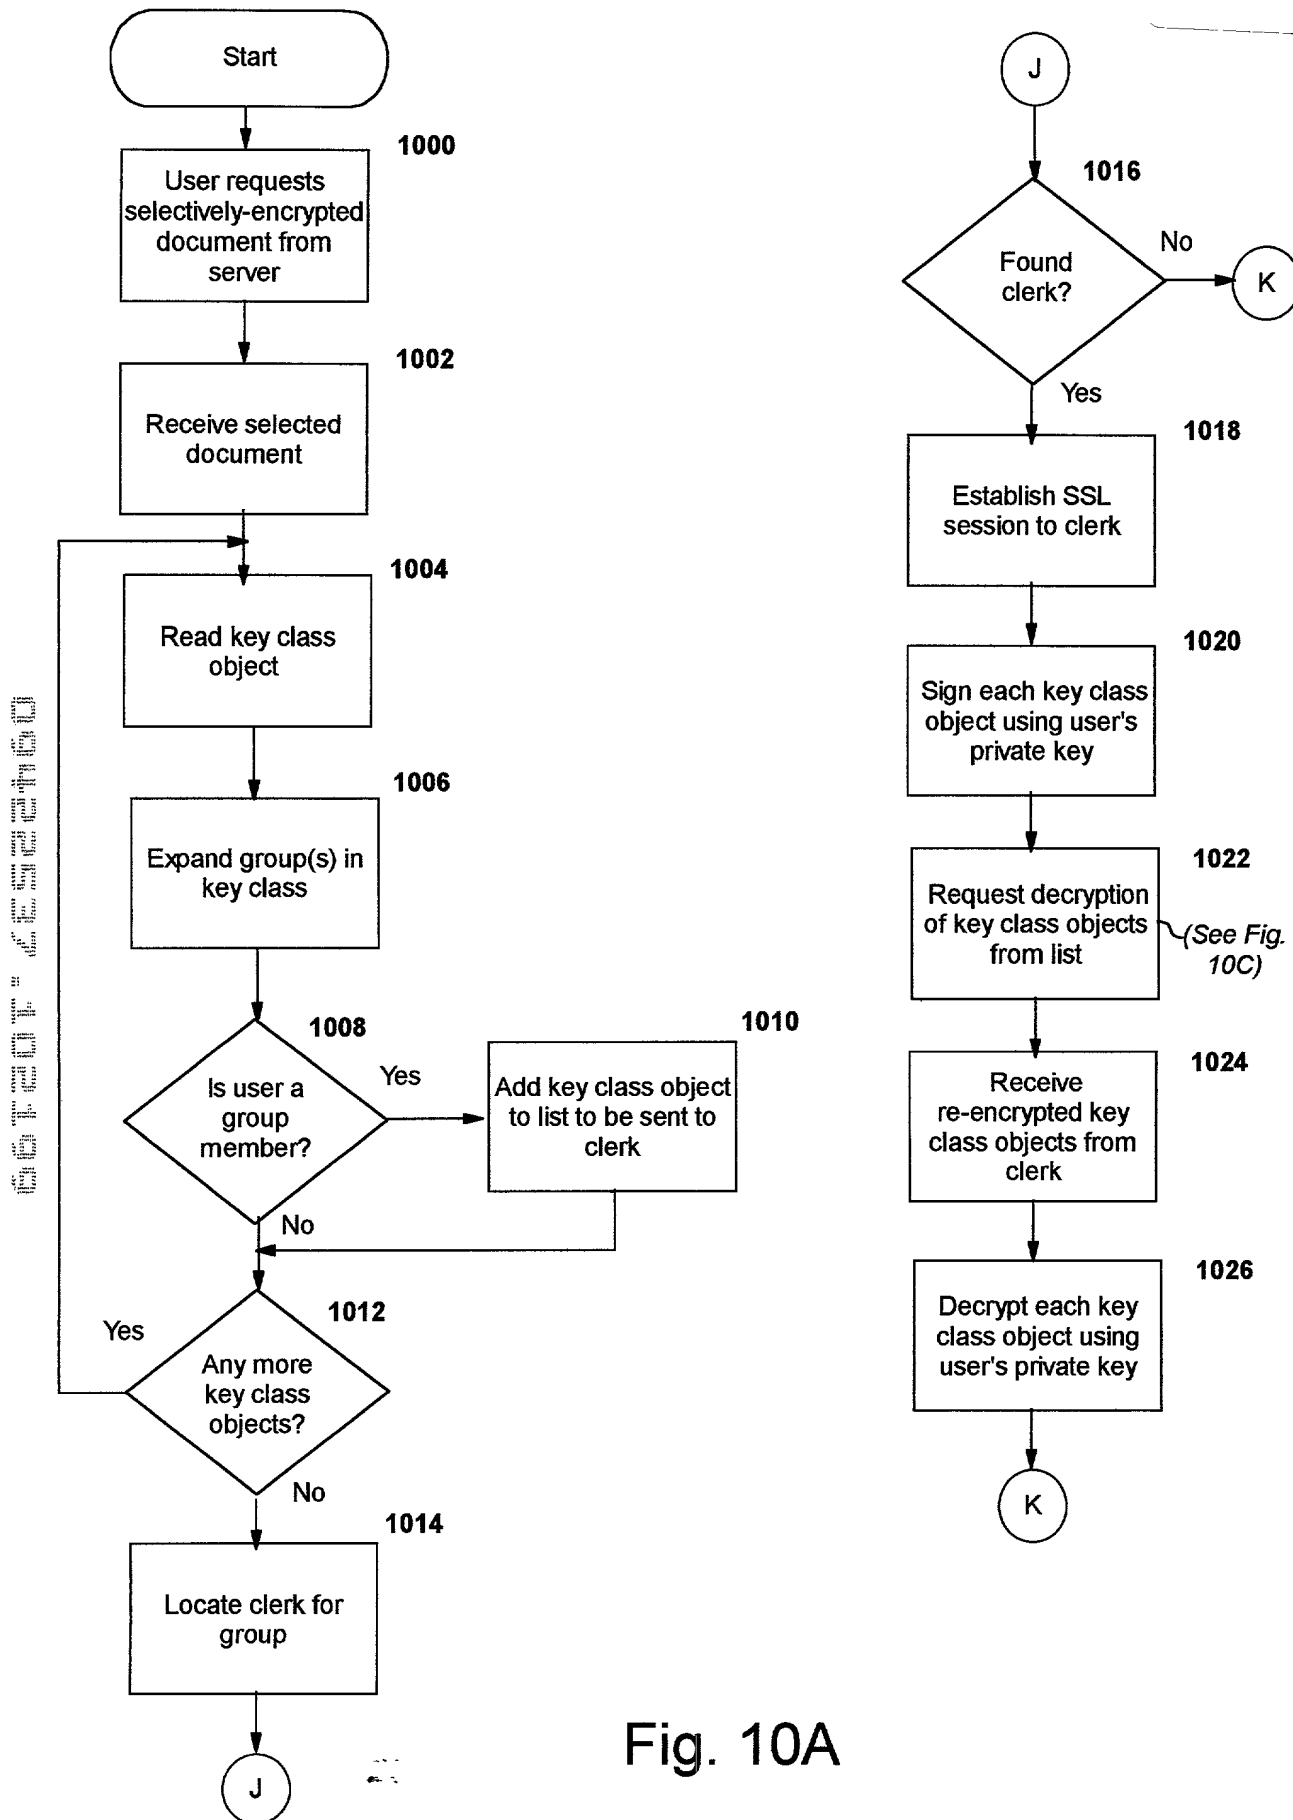
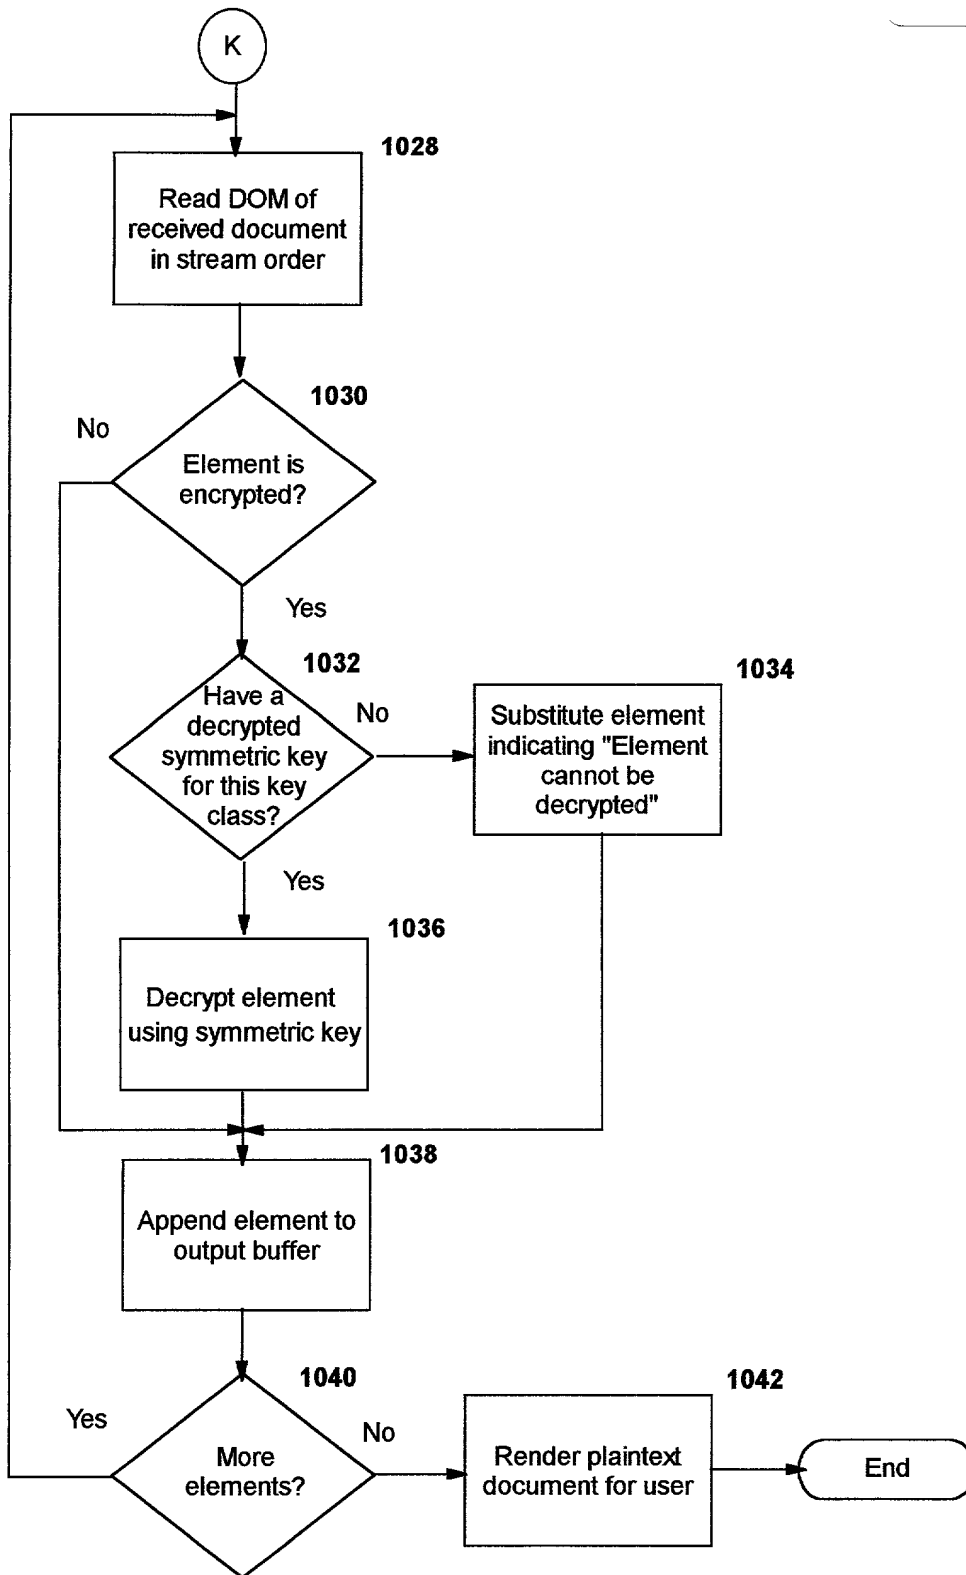


Fig. 9A









**Fig. 10B**

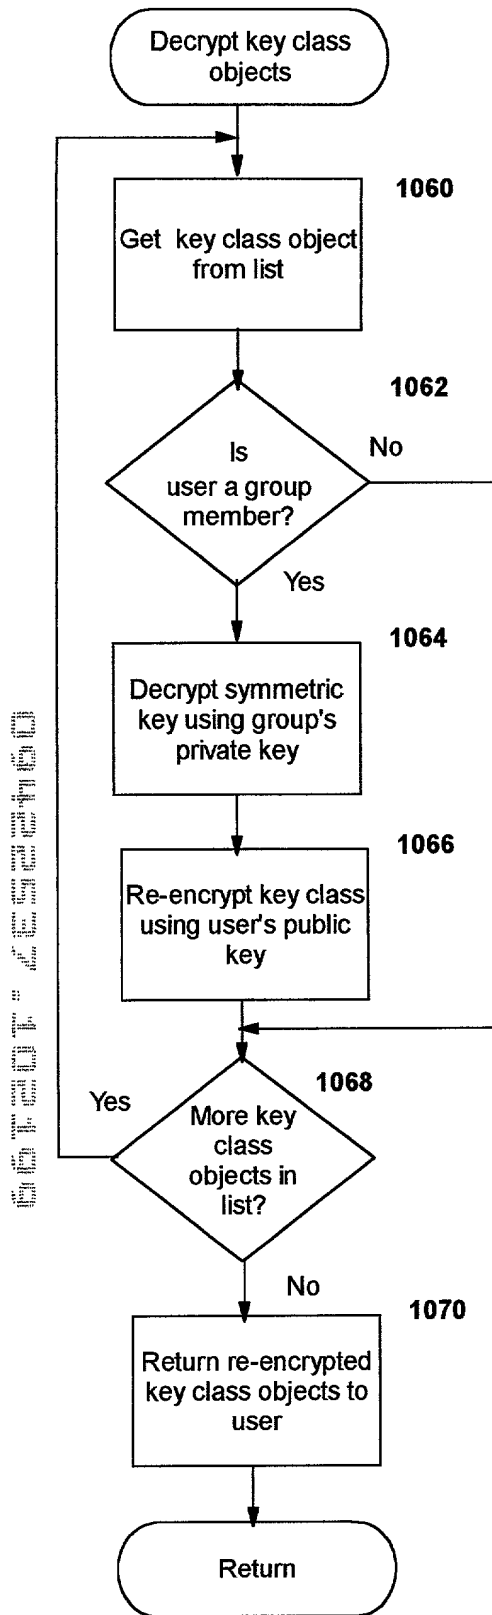


Fig. 10C

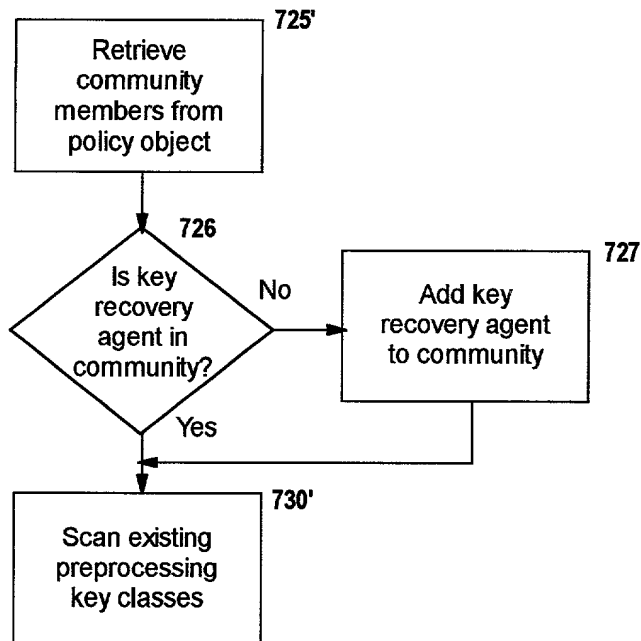


Fig. 11A


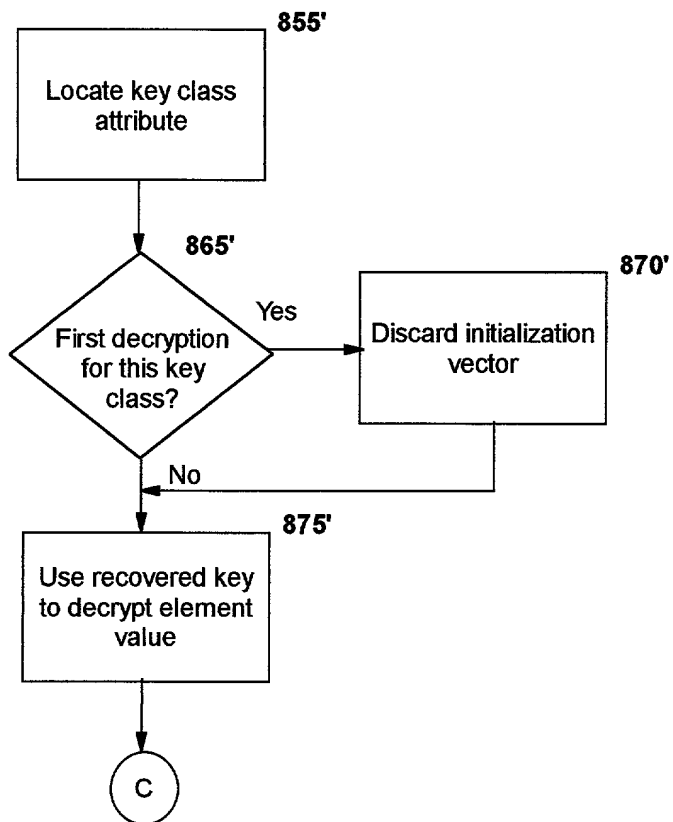


Fig. 11B

Fig. 12

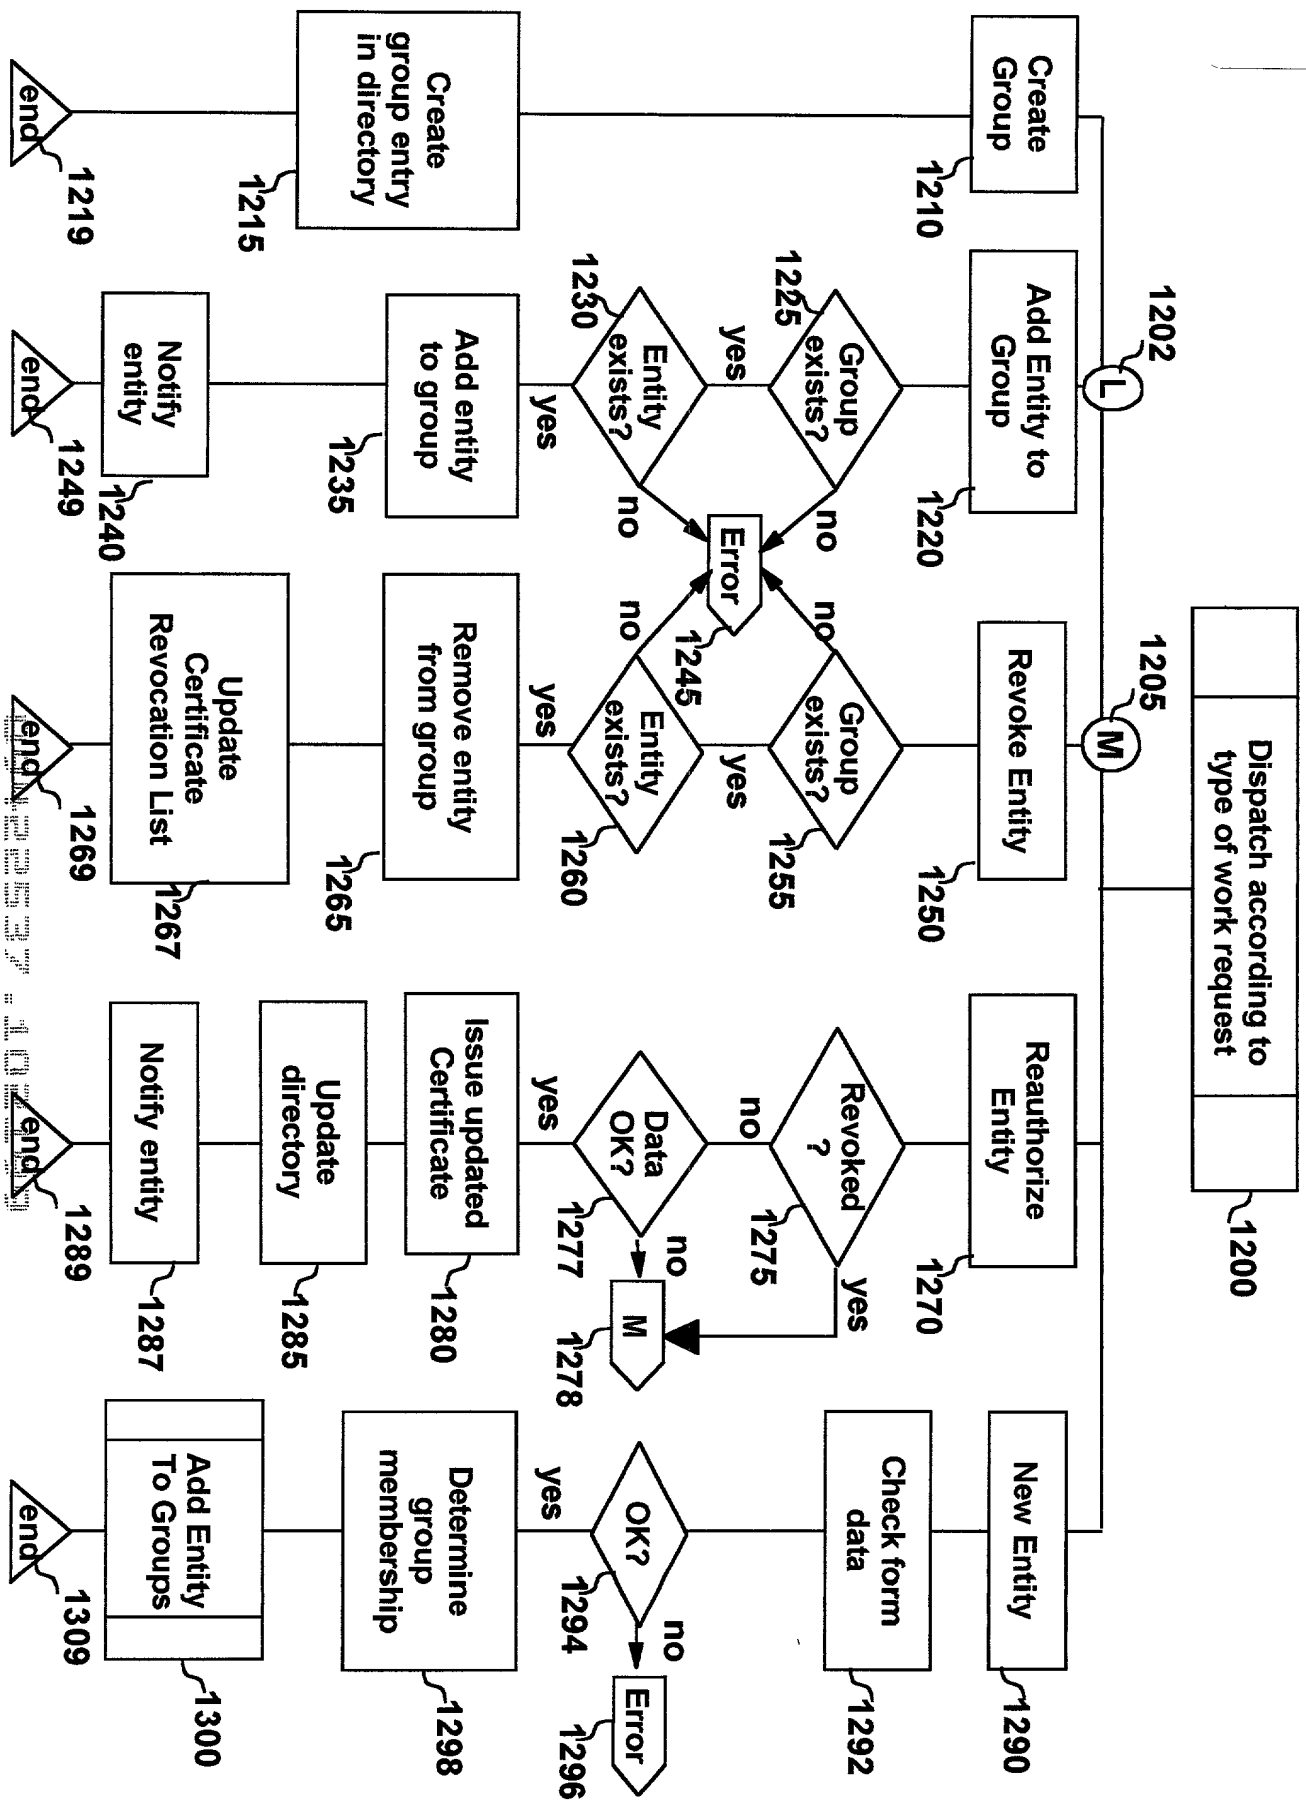

### Declaration and Power of Attorney for Patent Application

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

#### Selective Data Encryption Using Style Sheet Processing for Decryption by a Group Clerk

the specification of which (check one)

☒

is attached hereto.

☐

was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_ and was amended on

\_\_\_\_\_.

I hereby state that I have reviewed and understand the contents of the above- identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):

Number

Country

Day/Month/Year

Priority Claimed

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Prior U.S. Applications:

Serial No.

Filing Date

Status

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both,

DECLARATION AND POWER OF ATTORNEY

under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

J. S. Ray-Yarletts, Reg. No. 39,808; B. A. Clay, Reg. No. 32,121; G. M. Doudnikoff, Reg. No. 32,847; E. H. Duffield, Reg. No. 25,970; J. W. Herndon, Reg. No. 27,901; C. A. Hughes, Reg. No. 26,914; E. A. Pennington, Reg. No. 32,588; J. E. Hoel, Reg. No. 26,279; and J. C. Redmond, Jr., Reg. No. 18,753.

Send all correspondence to: Jeanine S. Ray-Yarletts  
IBM Corp., Dept. T81/Bldg. 062  
P.O. Box 12195  
Research Triangle Park, NC 27709  
Phone: 919-543-2541 Fax: 919-254-4330

(1) Inventor: **Mark C. Davis**

Signature:

*Mark C. Davis*

*10/21/99*

Date

Residence:

201 Spring Garden Drive  
Durham, North Carolina 27713

Citizenship:

United States of America

Post Office  
Address:

same

(2) Inventor: **John R. Hind**

Signature:

*John R. Hind*

*10/21/99*

Date

Residence:

5005 Barton's Enclave Lane  
Raleigh, North Carolina 27613

Citizenship:

United States of America

Post Office  
Address:

same

RECEIVED  
10

(3) Inventor: **Marcia L. Peters**

Signature:

Min. J. Peter

10/21/99

Date \_\_\_\_\_

Residence: 712 Lochgarton Lane  
Raleigh, North Carolina 27614

Citizenship: United States of America

Post Office  
Address: same

(4) Inventor: **Brad B. Topol**

Signature:

Brad B. Zofel

10/21/99  
Date

Date \_\_\_\_\_

Residence: 209 Fern Ridge Drive  
Raleigh, North Carolina 27606

Citizenship: United States of America

Post Office  
Address: same

[illegible]